



PERFORMANCE IN MOTION

EXUSTAR is a leading supplier of bicycle, indoor cycling and motorcycle gear. It is our goal to provide a simpler, more convenient, comfortable and efficient riding experience. Since 2002 we've been committed to the development of new technologies and products, continuously innovating and improving. We place top priority on quality and safety, and all our products are thoroughly tested and, where appropriate, certified. In addition to our own Exustar brand, we work closely with other companies on an ODM or OEM basis, helping them to bring their products successfully to the global market.

WWW.EXUSTAR.COM



CYCLING



INDOOR



MOTOR

Exustar Enterprise Co. Ltd.

T e l : +886 (0) 4 2693 7999 F a x : +886 (0) 4 2693 8777 Email: exustar@exustar.com
No.111, Aly. 23, Ln. 430, Wang-Fu St., Dadu Dist., Taichung City 432, Taiwan

Specifications subject to change without notice. All other trademarks are the property of their respective owners.
Copyright © 2022 Exustar Enterprise Co. Ltd. All rights reserved.



EXUSTAR

PERFORMANCE IN MOTION

EXUSTAR

2023 CATALOGUE CYCLING



2023 CATALOGUE
CYCLING



20 YEARS OF PERFORMANCE IN MOTION (2002-2022)

Exustar celebrates 20 years in the bicycle industry! We have come a long way since we started in 2002. Along the way we have faced challenges and overcome obstacles in this ever-changing industry. As we have grown, with each passing year our commitment to continuous improvement and innovation grows stronger. We thank our loyal customers for their continued support.

2002

Exustar Co. Ltd. is established.

2003

Carbon fiber products developed.

2005

The Exustar Pedaling System (EPS) developed.

2006

Exustar enters the motorcycle market with a line of leather boots.

2007

Exustar wins top honors at the Innobike design competition. Titanium pedals begin production.

2009

A breakthrough in lightweight pedal design: 176 g/pr.

2010

Exustar sponsored rider (Hsiao Mei Yu) wins a gold medal at the Asian Games.

2011

Exustar cooperates with Garmin to develop the Vector pedal-based power meter.

2012

Company offers road pedals with different levels of binding tension.

2013

Exustar enters the US market. New state-of-the-art pedal manufacturing facility opens in Taiwan.

2014

Development of a line of exceptionally strong and durable indoor pedals—designed for the rigors of fitness centers.

2015

Exustar moves into a purpose-built facility in Taiwan with state of the art CNC-machining facilities.

2016

Exustar takes indoor cycling to a new level with the toughest, most durable and versatile pedals on the market and an indoor shoe designed for fitness centers.

2017

Exustar moves pedal manufacturing to its own production facility.

2018

The heavy-duty ISX Drive System is developed for indoor cycling.

2019

The Exustar motorcycle and bicycle marketing and sales teams merged into one unified unit.

2020

The company launches Triple Layer Cleat Technology, and a line of road pedals with transparent bodies.

2021

Exustar-sponsored rider Eva Lechner competes at the Tokyo Olympics.

2022

Exustar celebrates 20 years in the bicycle industry.





4	PEDALS
140	CLEATS
160	SHOES
214	HELMETS
220	EYEWEAR
226	BOTTLE CAGES
232	GLOVES
242	CLOTHING
308	BAGS
312	DEALER PRODUCTS
316	DISTRIBUTORS

/INDEX



14	ROAD PEDALS
52	TRACK PEDALS
56	MTB PEDALS
84	BMX PEDALS
98	URBAN PEDALS
102	INDOOR PEDALS
136	ROWING PEDALS

PEDALS

INDEX

PEDAL TECHNOLOGY

BODY MATERIAL & MANUFACTURE



CARBON COMPOSITE BODY

Carbon fiber composite is a strong, lightweight material, an injection molded composite of carbon fiber and nylon.



FORGED ALUMINIUM BODY

Forged aluminum is the strongest pedal body we offer. Forging however, has some limitations shaping pedal bodies. For this reason, they are often further processed with CNC-machines.



ANODIZED BODY

Anodizing provides a protective coating, and is used to colour pedal body.



DIE-CAST ALUMINUM BODY

Die-casting—a very serviceable technology—allows much freedom in shaping a pedal body.



EXTRUDED ALUMINIUM BODY

Extruding an aluminum pedal body ensures a stronger structure. Extruded aluminum can be anodised in a variety of colours.



CNC MACHINED ALUMINIUM BODY

Often a forged pedal body is CNC-machined to achieve the desired shape and finish. Extruded, CNC-machined aluminum can be anodised in a variety of colours.



MAGNESIUM BODY

A pedal body made of lightweight material.



AXLES & BEARINGS



TITANIUM AXLE

Titanium is an extremely light, strong material.



CRANK SIDE BEARINGS

Large ball bearings built into the pedal body close to the bicycle crank. These allow us to build a pedal platform that is very low profile.



AEROSPACE MATERIAL

Aerospace Material Specification Axle, w/ Sealed cartridge system.



ISXb (HYBRID) AXLE

Override axle with ISB drive system.



SUPERSIZE AXLES

Supersize axle and anti-loosening axle device. Quad LSL bearings. Available in 4 different lengths.



SUPERSIZE AXLES (ISXs DRIVE SYSTEM)

Available in 4 different lengths.



NEEDLE BEARINGS

Needle bearings are used to reduce friction, and increase contact area, while still allowing a slim axle profile.



OVERSIZED NEEDLE BEARINGS

Large diameter needle bearings are used on pedals with oversized axles (such as indoor pedals, where strength is paramount). Needle bearings are very smooth running.









TRIPLE BEARINGS

Three bearings (LSL bushing, sealed, & needle) placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.



TUBULAR LSL BEARINGS

An integrated bearing-cartridge system that provides full contact support between axle and bearing.

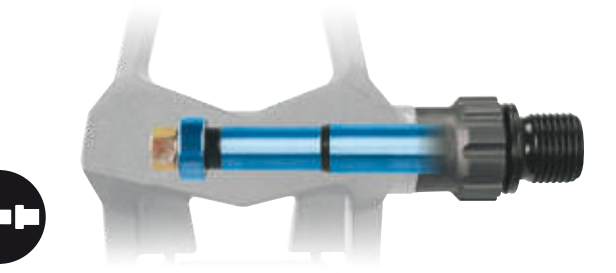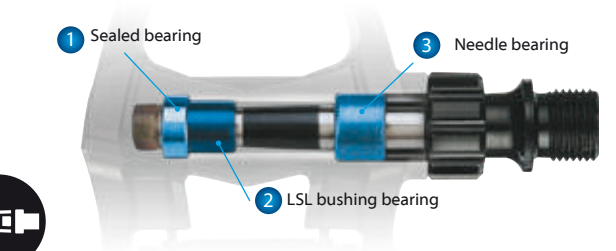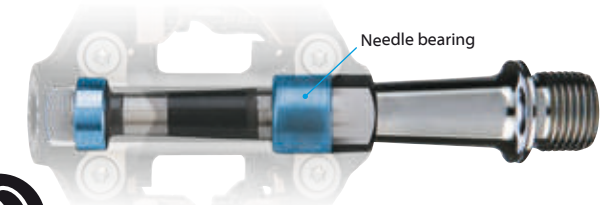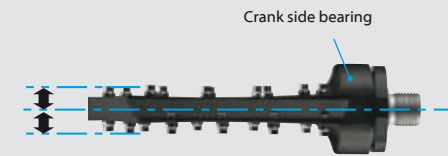


PEDAL TECHNOLOGY

OTHER FEATURES



ABRASION GUARD

Helps prevent cleat abrasion on the pedal body.

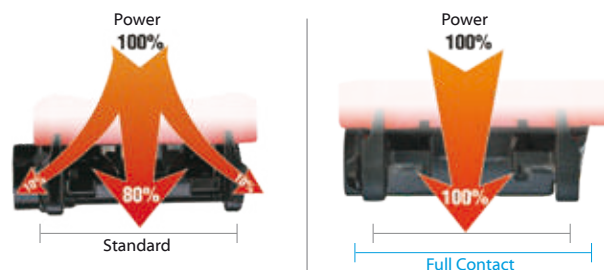


FULL CONTACT BODY

Increased contact area (62 mm wide) between pedal body and cleat ensures extra power, support, and stability. Interface also enables easier cleat engagement.



LOW STACK HEIGHT

A low profile pedal body means a lower stack height (16.3 mm).* This allows greater ground clearance, and increases pedaling efficiency by placing the foot closer to the centreline of the axle.

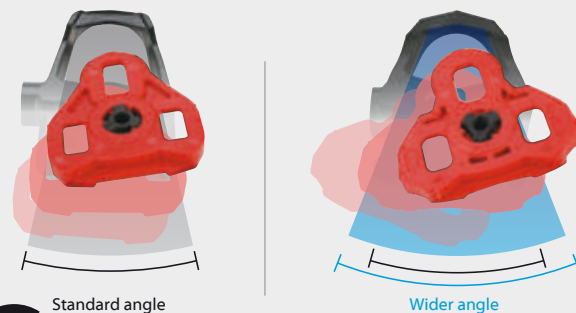

EASY TOE IN CLEAT ENGAGEMENT

Allows a wider angle range for easier toe-in engagement.



ULTRALIGHT

Pedals that weight 240 grams a pair or less.



TENSION GAUGE

Integral binding tension indicator makes it easy for riders to set and adjust tension.



REPLACEABLE GRIP PINS

Worn or broken pins can be easily replaced.



ICON GUIDE



ROAD



TIME TRIAL



TRACK



MTB



DOWNHILL



FREERIDE



ENDURO



ALL MOUNTAIN



TOURING



XC



GRAVEL



BMX



URBAN



INDOOR

ROAD

PRO

ADVANCED

EXPERT

COMP

SPORT

ROAD PEDAL LEVEL & USE GUIDE

Use this to help you find pedals appropriate to your budget and riding style.



SPRINTING



ALL-ROUND



CLIMBING



SPRINTING



ALL-ROUND



CLIMBING



SPRINTING
ALL-ROUND



CLIMBING
ALL-ROUND



SPRINTING
ALL-ROUND



CLIMBING
ALL-ROUND



ALL-ROUND



E-PR4STCK



E-PR3CKTI



E-PR4ST



E-PR4



E-PR2-BK-A



E-PR1



E-PR1AL



E-PR17



E-PR2STCKTI



E-PR200CKTI



E-PR3CK




E-PR3ST



E-PR2ST



E-PR2CK



E-PR1CK



E-PR105ST



E-PR103ST



E-PR101SL



Compatible with
Look Keo



Compatible with
Look Delta



Compatible with
Shimano SPD-SL



E-PR75ST



E-PR73ST



E-PR25ST



E-PR23ST



E-PR18CK

ROAD PEDAL SERIES GUIDE


Pedal Series	Interface	Large Contact Area	Enclosed Binding Mechanism
PR-4	EPS-R (Compatible with Look Keo).	•	•
PR-3	EPS-R (Compatible with Look Keo).	•	•
PR-2	EPS-R (Compatible with Look Keo).	•	•
PR-1	EPS-R (Compatible with Look Keo).	•	•
PR-200	EPS-R (Compatible with Look Keo).	•	Some models
PR-201	EPS-R (Compatible with Look Keo).	•	•
PR-105	EPS-R (Compatible with Look Keo).	•	•
PR-103	EPS-R (Compatible with Look Keo).	•	•
PR-17	EPS-R (Compatible with Look Keo).		
PR-73	EPS-R (Compatible with Look Delta).	•	•
PR-25	EPS-SL (Compatible with Shimano SPD-SL).		•
PR-23	EPS-SL (Compatible with Shimano SPD-SL).	•	•
PR-18	EPS-SL (Compatible with Shimano SPD-SL).		•
PR-15	EPS-SL (Compatible with Shimano SPD-SL).	•	•
EPS-M	EPS-M (Compatible with Shimano SPD).		
TRACK	EPS-T Cleats		Some models

Pedal Series	Triple Bearings	Dual Bearings	Tension Gauge	Easy In Cleat Engagement
PR-4		•	•	•
PR-3	•		•	•
PR-2	Some models	•	•	•
PR-1		•	•	
PR-200		•	•	•
PR-201		•	•	•
PR-105		•	•	•
PR-103		•	•	•
PR-17		•	•	
PR-73		•	•	•
PR-25		•	•	•
PR-23		•	•	•
PR-18		•	•	
PR-15			•	
EPS-M		•	•	
TRACK		•	Some models	


Pedal Series	Interface
PR-10xx	EPS-R (Compatible with Look Keo).
PR-7x	EPS-R (Compatible with Look Delta).
PR-2x	EPS-SL (Compatible with Shimano SPD-SL).
PR-5x	EPS-M (Compatible with Shimano SPD).
PB-5x	Large surface.
PB-7x	Medium surface.
PM/PC90x	URBAN.
PM2x	Double-sided with EPS-M (Compatible with Shimano SPD).
PM8x	Large surface or single-sided with (Compatible with Shimano SPD).

MTB


PRO




66




67




67



50




58




62


ADVANCED




70




69




74




70




82




60




68




64




78




79




68




71




75




83



80




81




Compatible with Shimano SPD

BMX


ADVANCED




86




87



92




96




97


EXPERT




88




89




90



91



93




94


SPORT

INDOOR


ADVANCED




123




108




109




110




111




112




124




113




114




115




116




117




129




118




119




120




121




122




128




128



129



Compatible with Look Keo / Delta



Compatible with Shimano SPD





135



135

OUTDOOR





133



132

TRACK



EPS-T Cleats



53



54

URBAN



99



100



101


ROAD

Pedals





PR4
SERIES

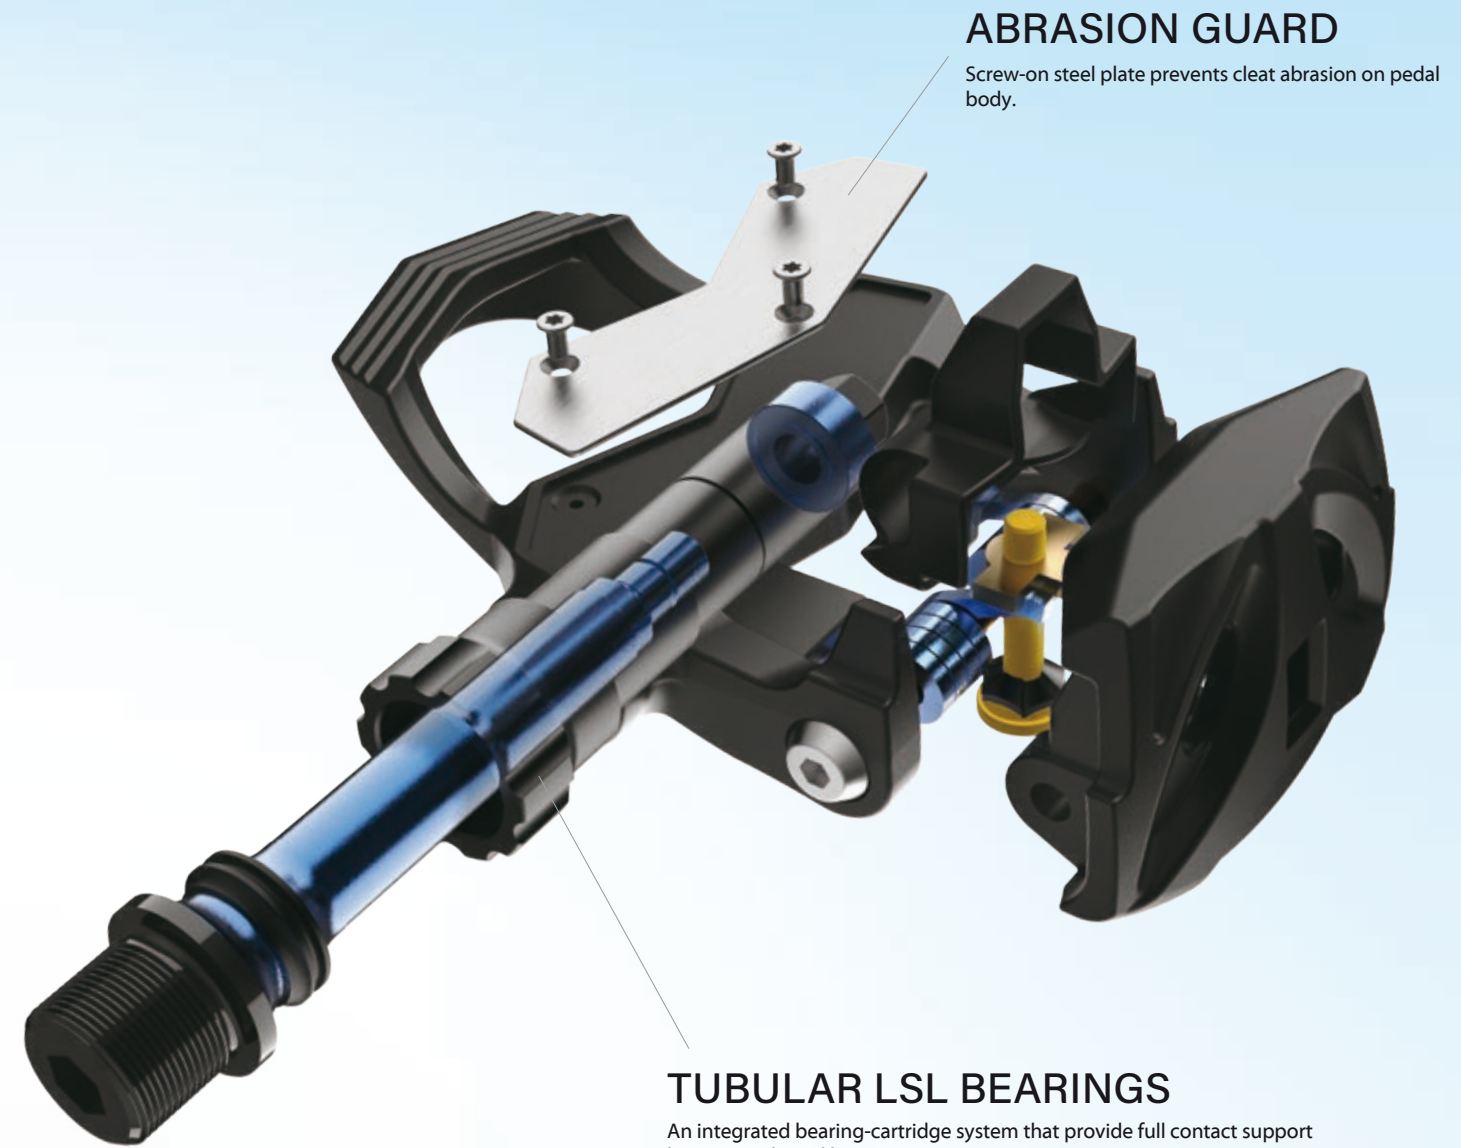


ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.


TUBULAR LSL BEARINGS

An integrated bearing-cartridge system that provide full contact support between axle and bearing.

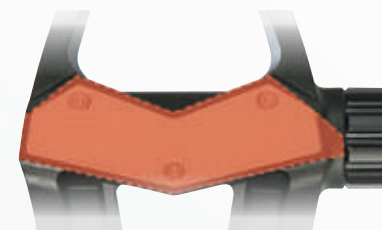

FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



LOW STACK HEIGHT

A low profile pedal body means a lower stack height (16.3 mm).* This allows greater ground clearance, and increases pedaling efficiency by placing the foot closer to the centreline of the axle.

* Stack height is the distance from the bottom of the shoe sole to the centreline of the pedal axle.



Option



E-PR4STCKTi



Low stack height

A low profile pedal body means a lower stack height (16.3 mm). This allows greater ground clearance, and increases pedaling efficiency by placing the foot closer to the centreline of the axle.



Tubular LSL bearings

An integrated bearing-cartridge system that provides full contact support between axle and bearing.



► E-PR4STCK

CARBON COMPOSITE FULL CONTACT ROAD PEDALS

A carbon fiber composite pedal featuring a CNC Cr-Mo axle, an extra tough yet slimline tubular LSL bearings, and an abrasion guard. A gauge makes precise binding tension adjustment easy.

- Low stack height
- Tubular LSL bearings
- Carbon composite body
- Abrasion guard
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Low stack height (16.3 mm), Full contact, carbon fiber-nylon composite, with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings Tubular LSL bearings (integrated cartridge).

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR2

Size 85 x 88 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



270 g/pr

Option



E-PR4STTi

225 g/pr



► E-PR4ST

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, low stack height thermoplastic body, an abrasion guard, a Cr-Mo axle, tubular LSL bearings, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Low stack height
- Tension gauge
- Tubular LSL bearings

Interface EPS-R (Compatible with Look Keo).

Body Low stack height (16.3 mm), full contact, engineering thermoplastic with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (plastic cartridge).

Bearings Tubular LSL bearings (integrated cartridge).

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR2

Size 85 x 88 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



263 g/pr

► E-PR4

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, low stack height thermoplastic body, a Cr-Mo axle, tubular LSL bearings, and a gauge makes precise binding tension adjustment easy.

- Low stack height
- Tubular LSL bearings
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Low stack height (16.3 mm), full contact, engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo (plastic cartridge).

Bearings Tubular LSL bearings (integrated cartridge).

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.


Cleats E-ARCR2

Size 85 x 88 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



PR3
SERIES

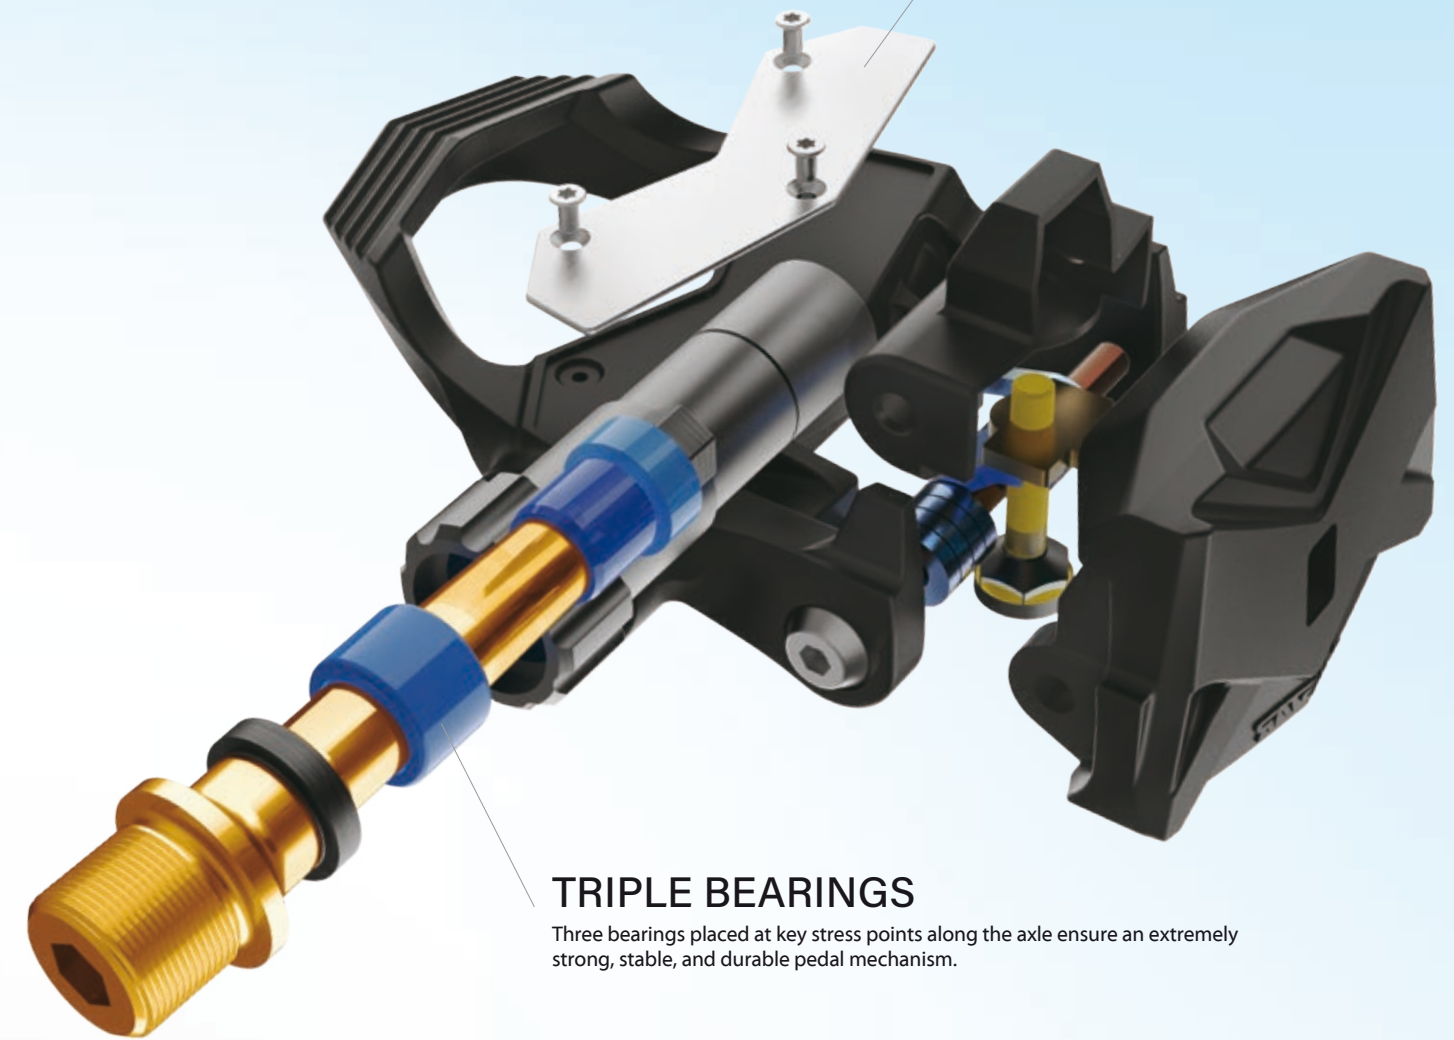


ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

TRIPLE BEARINGS

Three bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal mechanism.

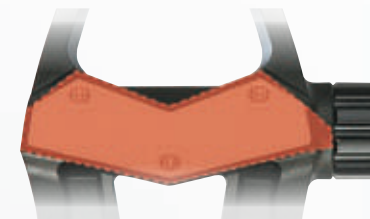

FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



— Full Contact Area
— Standard pedals contact area



EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.



250 g/pr



TiN-coated

Titanium Axle
Titanium is an extremely light, strong material.



Tension Gauge
Integral binding tension indicator makes it easy for riders to set and adjust tension.



► E-PR3CKTI

CARBON COMPOSITE FULL CONTACT ROAD PEDALS

A carbon fiber composite pedal featuring a CNC titanium axle, an extra-tough yet slimline triple bearing mechanism, and an abrasion guard. High tension bindings are ideal for sprinting. A gauge makes precise binding tension adjustment easy.

- Carbon composite body
- Titanium axle
- Extra-tough, durable triple bearings
- High tension bindings
- Abrasion guard
- Tension gauge

Interface	EPS-R (Compatible with Look Keo).
Body	Full contact, carbon fiber-nylon composite, with stainless steel abrasion guard.
Axle	CNC-machined titanium TiN coated (cartridge).
Bearings	LSL bushing, sealed, & needle.
Binding	Carbon fiber-nylon composite, enclosed mechanism tension adjustable (high tension springs: up to 180 kgf/cm) with gauge.
Cleats	E-ARCR2
Size	86 x 90 mm
Compatible with Exustar road shoes, other 3 bolt hole shoes.	



299 g/pr



Side B



► E-PR3CK

CARBON COMPOSITE FULL CONTACT ROAD PEDALS

A carbon fiber composite pedal featuring a CNC Cr-Mo axle, an extra-tough yet slimline triple bearing mechanism, and an abrasion guard. High tension bindings are ideal for sprinting. A gauge makes precise binding tension adjustment easy.

- Carbon composite body
- Extra-tough, durable triple bearings
- High tension bindings
- Abrasion guard
- Tension gauge

Interface	EPS-R (Compatible with Look Keo).
Body	Full contact, carbon fiber-nylon composite, with stainless steel abrasion guard.
Axle	Heat-treated, CNC-machined Cr-Mo (cartridge).
Bearings	LSL bushing, sealed, & needle.
Bindings	Carbon fiber-nylon composite, enclosed mechanism, tension adjustable (high tension springs: up to 180 kgf/cm) with gauge.
Cleats	E-ARCR2
Size	86 x 90 mm
Compatible with Exustar road shoes, other 3 bolt hole shoes.	



312 g/pr



► E-PR3ST

FULL CONTACT ROAD PEDALSS

Durable thermoplastic pedal featuring a CNC Cr-Mo axle, an extra-tough yet slimline triple bearing mechanism, and an abrasion guard. High tension bindings are ideal for sprinting. A gauge makes precise binding tension adjustment easy.

- Extra-tough, durable triple bearings
- High tension bindings
- Abrasion guard
- Tension gauge

Interface	EPS-R (Compatible with Look Keo).
Body	Full contact, engineering thermoplastic, with stainless steel abrasion guard.
Axle	Heat-treated, CNC-machined Cr-Mo (cartridge).
Bearings	LSL bushing, sealed, & needle.
Binding	Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable (high tension springs: up to 180 kgf/cm) with gauge.
Cleats	E-ARCR2
Size	86 x 90 mm
Compatible with Exustar road shoes, other 3 bolt hole shoes.	



PR2
SERIES



ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

TRIPLE BEARINGS

Three bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal mechanism.



FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



— Full Contact Area
— Standard pedals contact area



EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.

PRO



235 g/pr



Option



285 g/pr

E-PR2STCK



E-PR2STCKTI

CARBON COMPOSITE FULL CONTACT ROAD PEDALS

A carbon fiber composite pedal featuring a titanium axle, an extra-tough yet slimline triple bearing mechanism, and an abrasion guard. High tension bindings are ideal for sprinting. A gauge makes precise binding tension adjustment easy.

- Carbon composite body
- Titanium axle
- Extra-tough, durable triple bearings
- High tension bindings
- Abrasion guard
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Full contact, carbon fiber-nylon composite, with stainless steel abrasion guard.

Axle CNC-machined titanium TiN coated (cartridge).

Bearings LSL bushing, sealed, & needle.

Bindings Carbon fiber-nylon composite, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR2

Size 86 x 89 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

ADVANCED



298 g/pr

E-PR2ST

FULL CONTACT ROAD PEDALS

A durable thermoplastic pedal featuring a machined Cr-Mo axle, an extra-tough yet slimline triple bearing mechanism, and an abrasion guard.

- Extra-tough, durable triple bearings
- Abrasion guard
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Full contact, engineering thermoplastic with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing, sealed, & needle.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable.

Cleats E-ARCR2

Size 86 x 89 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



E-PR2CK

CARBON COMPOSITE, FULL CONTACT ROAD PEDALS

A pedal built with high end materials. It features a strong, featherlight carbon fiber composite body and binding, and a Cr-Mo axle on a slimline dual bearing system. The setup is rounded out with an enclosed mechanism to keep out grit, and a handy gauge makes binding precise tension adjustment easy.

- Carbon composite body & binding
- Enclosed mechanism
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Full contact, carbon fiber-nylon composite.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Carbon fiber-nylon composite, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR2

Size 86 x 89 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



262 g/pr

"one of the best
you can buy."
- Bike Radar

279 g/pr



E-PR2-BK-A

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, and a Cr-Mo axle on a slimline dual bearing system. A gauge makes precise binding tension adjustment easy.

- Tension gauge.

Interface EPS-R (Compatible with Look Keo).

Body Full contact, engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR2

Size 86 x 89 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

Color Options



E-PR2-WH

E-PR2-WH-A

E-PR2-BK-B



EXPERT

PR1
SERIES



DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.




Floating



fixed position

HIGH DURABILITY CLEATS

Redesigned high durability cleats. Wear indicators increase safety and convenience for users. Available with fixed or floating mode cleats.



TENSION GAUGE

Integral binding tension indicator makes it easy for riders to set and adjust tension.




253 g/pr

Option



203 g/pr

E-PR1CKTi



Tension Gauge
Integral binding tension indicator makes it easy for riders to set and adjust tension.

E-PR1CK



CARBON COMPOSITE ROAD PEDALS

A pedal built with high-end materials. It features a strong, carbon fiber composite body and binding, and a Cr-Mo axle on a slimline dual bearing system. A gauge makes precise binding tension adjustment easy.

- Carbon composite body & binding
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Carbon fiber-nylon composite.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Binding Carbon fiber-nylon composite, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR2

Size 82 x 82 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



265 g/pr

E-PR1

ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, and a Cr-Mo axle on a slimline dual bearing system.

- Tension gauge

Color Option



E-PR1-WH



Interface EPS-R (Compatible with Look Keo).

Body Engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiber-glass reinforced thermoplastic, enclosed mechanism, tension adjustable.

Cleats E-ARCR2

Size 82 x 82 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



289 g/pr

E-PR1AL

ROAD PEDALS

A pedal built with quality materials. It features a strong, aluminum body, and a Cr-Mo axle on a slimline dual bearing system.

- Liquid-coated aluminum body
- Tension gauge

Color ption



E-PR1AL-SL



Interface EPS-R (Compatible with Look Keo).

Body Liquid-coated surface, aluminum.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Binding Fiber-glass reinforced thermoplastic, enclosed mechanism, tension adjustable.

Cleats E-ARCR2

Size 82 x 82 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

EPS-R (Compatible with Look **Keo**).

PR200
series
PATENTED



"stunned at how well they work and how light they are."
—Velo News

176 g/pr

Option



170 g/pr

E-PR200CKTI-XS



244 g/pr

E-PR200BK



244 g/pr

E-PR200WH



► E-PR200CKTI



ULTRALIGHT, CARBON COMPOSITE, FULL CONTACT ROAD PEDALS

An ultralight pedal built with cutting-edge materials. It features a strong carbon fiber composite body and binding, and a titanium axle, TiN coated to improve hardness, and ensure silky smooth rolling. A gauge makes precise binding tension adjustment easy.

- Ultralight
- Carbon composite body & binding
- Titanium axle, TiN coated
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Full contact, carbon fiber-nylon composite.

Axle CNC-machined titanium, TiN coated (cartridge).

Bearings LSL bushing & sealed.

Bindings Carbon fiber-nylon composite, tension adjustable with gauge.

Cleats E-ARC11+

Size 86 x 89 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

OEM/ODM PRODUCTS available by order.



PR 105 SERIES NEW



EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.


FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

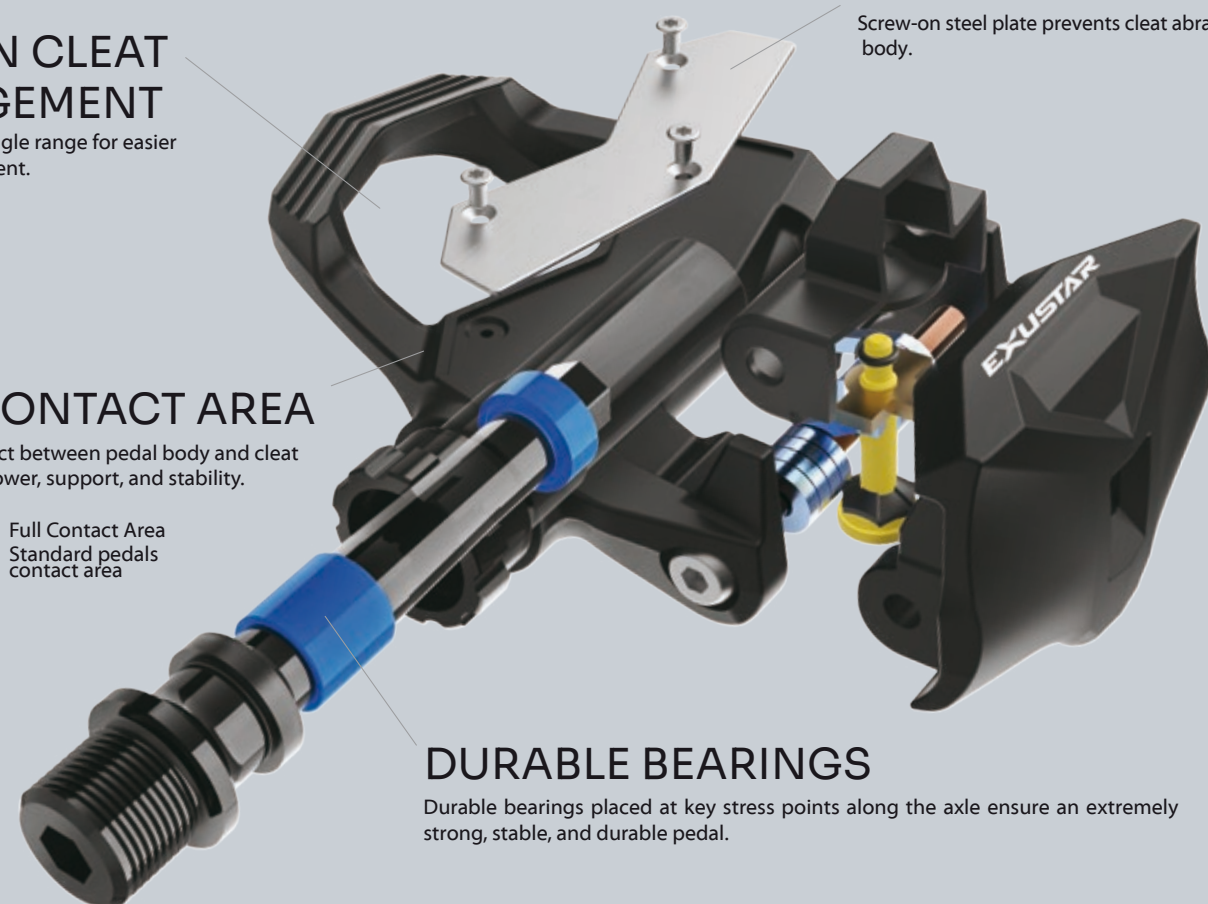

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

PATENTED



298 g/pr

Option



E-PR105P

278 g/pr



► E-PR105ST



FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Full contact, engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARCR3 H1

Size 87 x 92 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

ADVANCED



PR103
SERIES

EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.

FULL CONTACT AREA


Increased contact between pedal body and cleat ensures extra power, support, and stability.



— Full Contact Area
— Standard pedals contact area

ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

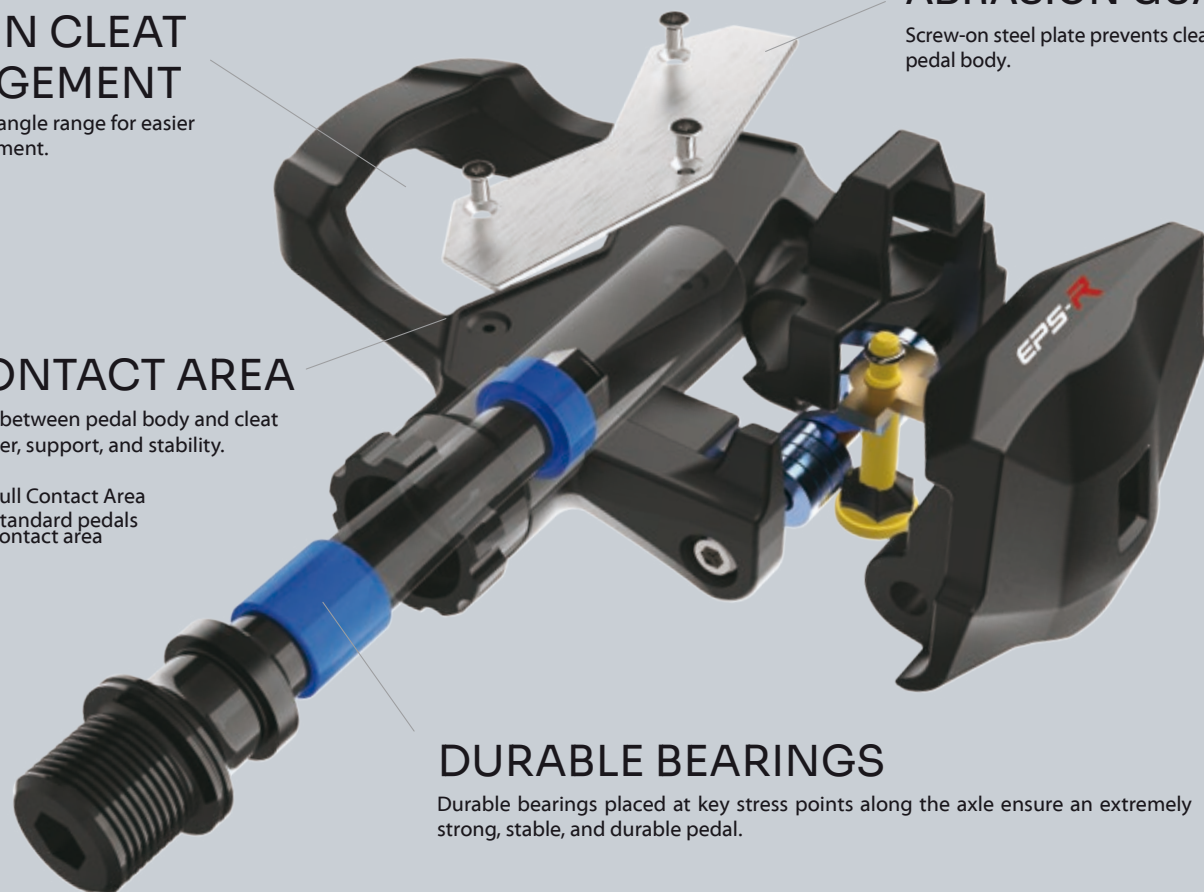

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

PATENTED



288 g/pr

Option



E-PR103P

268 g/pr



► E-PR103ST

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge



Interface EPS-R (Compatible with Look Keo).

Body Full contact, engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARC10

Size 85 x 87 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

PATENTED



290 g/pr



E-PR101SL



ROAD PEDALS

A pedal built with quality materials. It features a strong, aluminum body, and a Cr-Mo axle on a slimline dual bearing system.

Interface EPS-R (Compatible with Look Keo).

Body Hand-polished aluminum.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiber-glass reinforced thermoplastic, tension adjustable.

Cleats E-ARC10

Size 82 x 82 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

[OEM/ODM production](#) available.

PR17

PATENTED



328 g/pr



E-PR17



ROAD PEDALS

An entry-level pedal built with quality materials. It features a strong, aluminum body, and a Cr-Mo axle on a slimline dual bearing system.

- Tension gauge

Interface EPS-R (Compatible with Look Keo).

Body Aluminum.

Axle Heat-treated, CNC-machined Cr-Mo(cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARC10

Size 87 x 87 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

[OEM/ODM production](#) available.



PR25^{NEW}

SERIES



EASY IN CLEAT ENGAGEMENT


Allows a wide angle range for easier toe-in engagement.

ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

PATENTED



297 g/pr

Option



E-PR25P

279 g/pr



► E-PR25ST

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge



Interface EPS-SL (Compatible with Shimano SPD-SL)

Body Full contact, engineering thermoplastic, with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-RSL3H1

Size 87 x 96 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

PR23 SERIES




EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.


FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

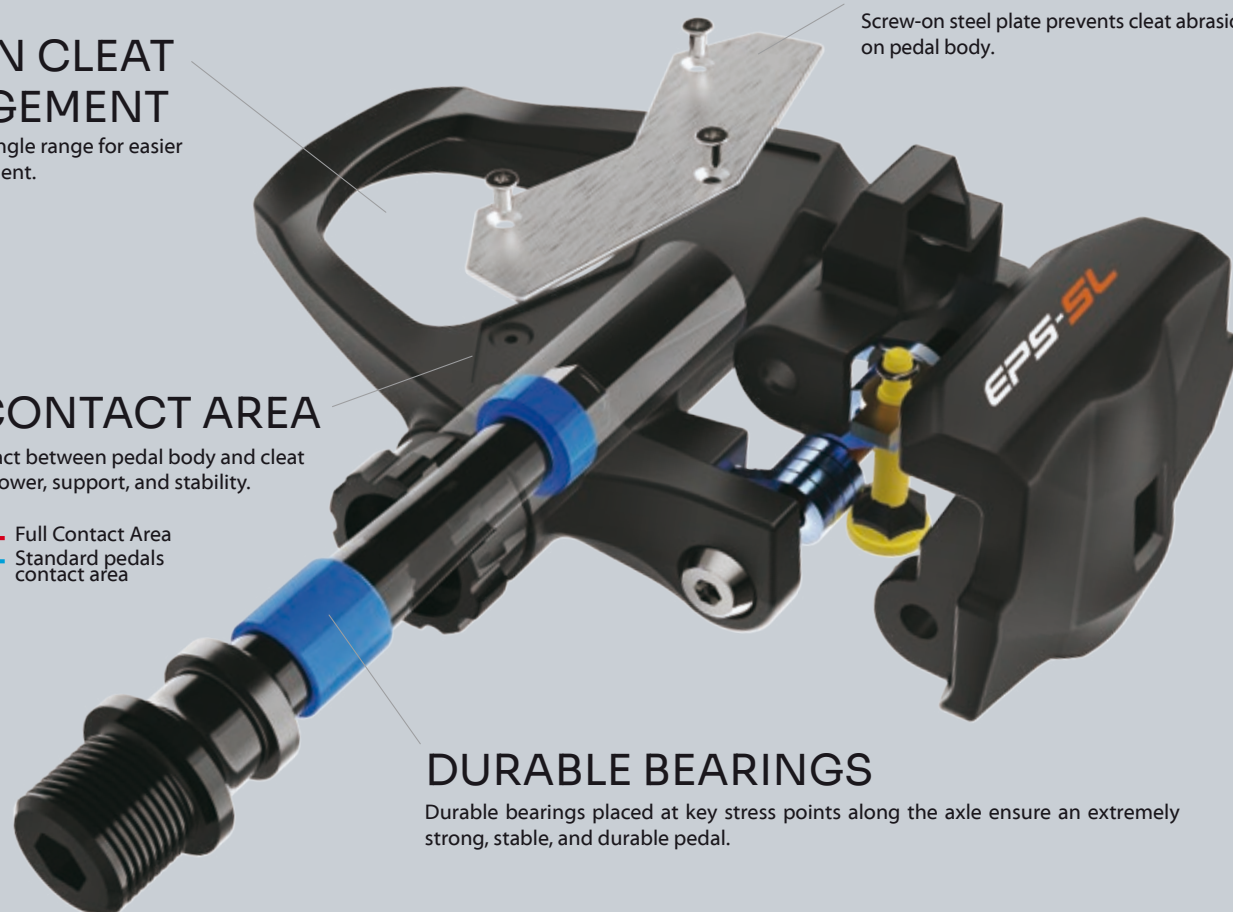

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

PATENTED



304 g/pr

Option



E-PR23P

287 g/pr



E-PR23ST

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge



Interface EPS-SL (Compatible with Shimano SPD-SL).

Body Full contact, engineering thermoplastic, with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-RSL3H1

Size 88 x 94 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

ADVANCED

PR18

PATENTED



296 g/pr

Option



E-PR18CKTI

246 g/pr



E-PR18ST

306 g/pr



E-PR18STTI

256 g/pr



E-PR18CK



CARBON COMPOSITE ROAD PEDALS

A pedal built with quality materials. It features a strong, carbon fiber composite body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge


Interface	EPS-SL (Compatible with Shimano SPD-SL).
Body	Carbon fiber-nylon composite, with stainless steel abrasion guard.
Axle	Heat-treated, CNC-machined Cr-Mo (cartridge).
Bearings	LSL bushing & sealed.
Binding	Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.
Cleats	E-RSL11
Size	Size 84 x 94.5 mm
Compatible with Exustar road shoes, other 3 bolt hole shoes.	
OEM/ODM production available.	

PR15

PATENTED



324 g/pr

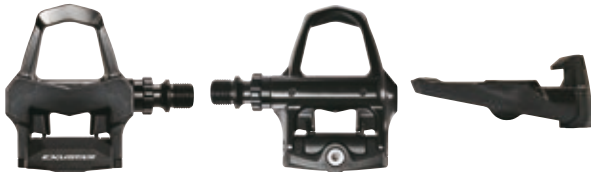

E-PR15



FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, aluminum body, and a Cr-Mo axle on a slimline dual bearing system.

- Tension gauge

Interface	EPS-SL (Compatible with Shimano SPD-SL).
Body	Full contact, aluminum.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Binding	Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.
Cleats	E-RSL1
Size	95 x 88 mm
Compatible with Exustar road shoes, other 3 bolt hole shoes.	



PR 75^{NEW} SERIES

EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.

FULL CONTACT AREA

Increased contact between pedal body and cleat ensures extra power, support, and stability.



— Full Contact Area
— Standard pedals contact area

ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.



DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

PATENTED



309 g/pr

Option



E-PR75P

291 g/pr



► E-PR75ST

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge



Interface EPS-R (Compatible with Look Delta).

Body Full contact, engineering thermoplastic, with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARC1

Size 87 x 98 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.



PR 73
SERIES

EASY IN CLEAT ENGAGEMENT

Allows a wide angle range for easier toe-in engagement.

FULL CONTACT AREA


Increased contact between pedal body and cleat ensures extra power, support, and stability.



— Full Contact Area
— Standard pedals contact area

ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

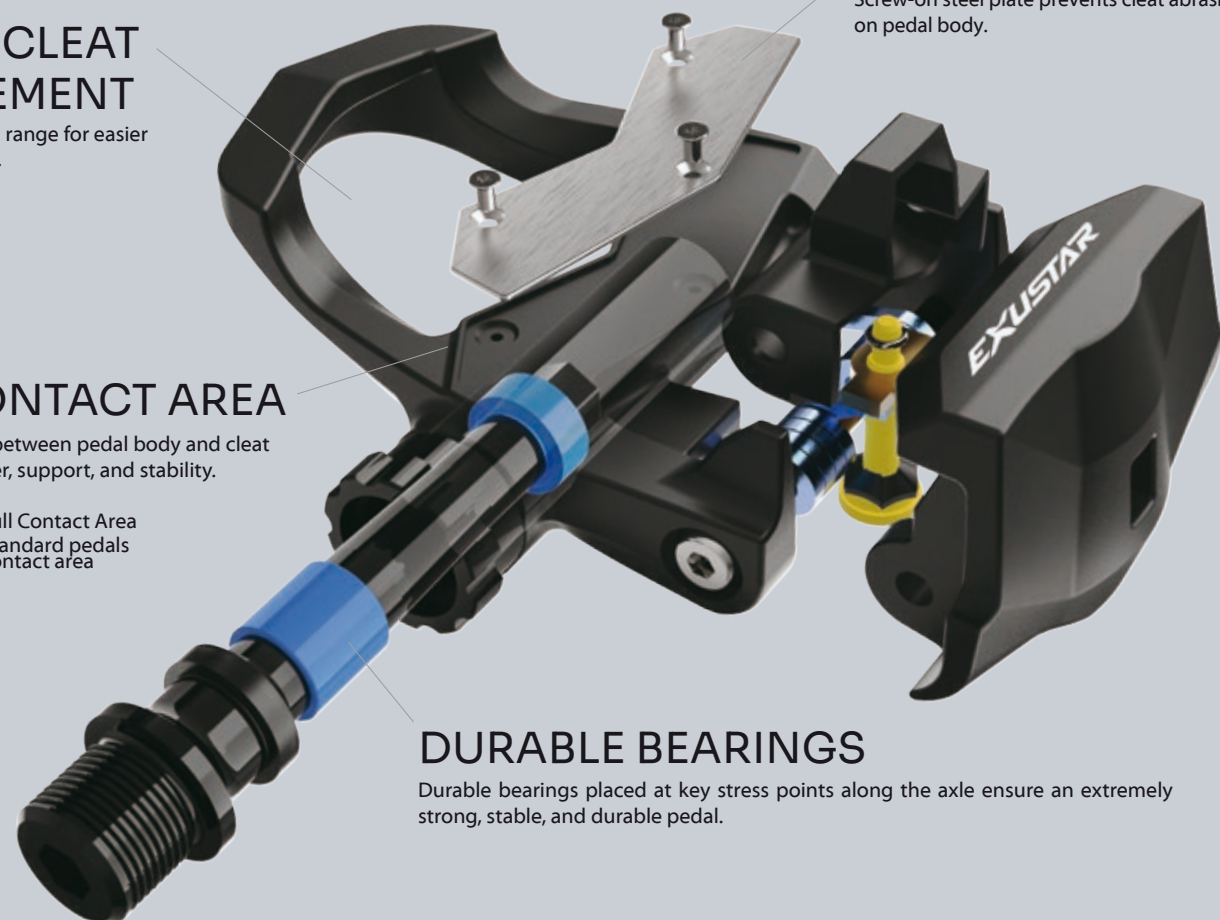

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

PATENTED



298 g/pr

Option



E-PR73P

294 g/pr



► E-PR73ST

FULL CONTACT ROAD PEDALS

A pedal built with quality materials. It features a strong, thermoplastic body, an abrasion guard, a Cr-Mo axle on a slimline dual bearing system, and a gauge makes precise binding tension adjustment easy.

- Abrasion guard
- Tension gauge



Interface EPS-R (Compatible with Look Delta).

Body Full contact, engineering thermoplastic, with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.


Bindings Fiberglass-reinforced thermoplastic, enclosed mechanism, tension adjustable with gauge.

Cleats E-ARC1

Size 85 x 94 mm

Compatible with Exustar road shoes, other 3 bolt hole shoes.

PR 50 SERIES

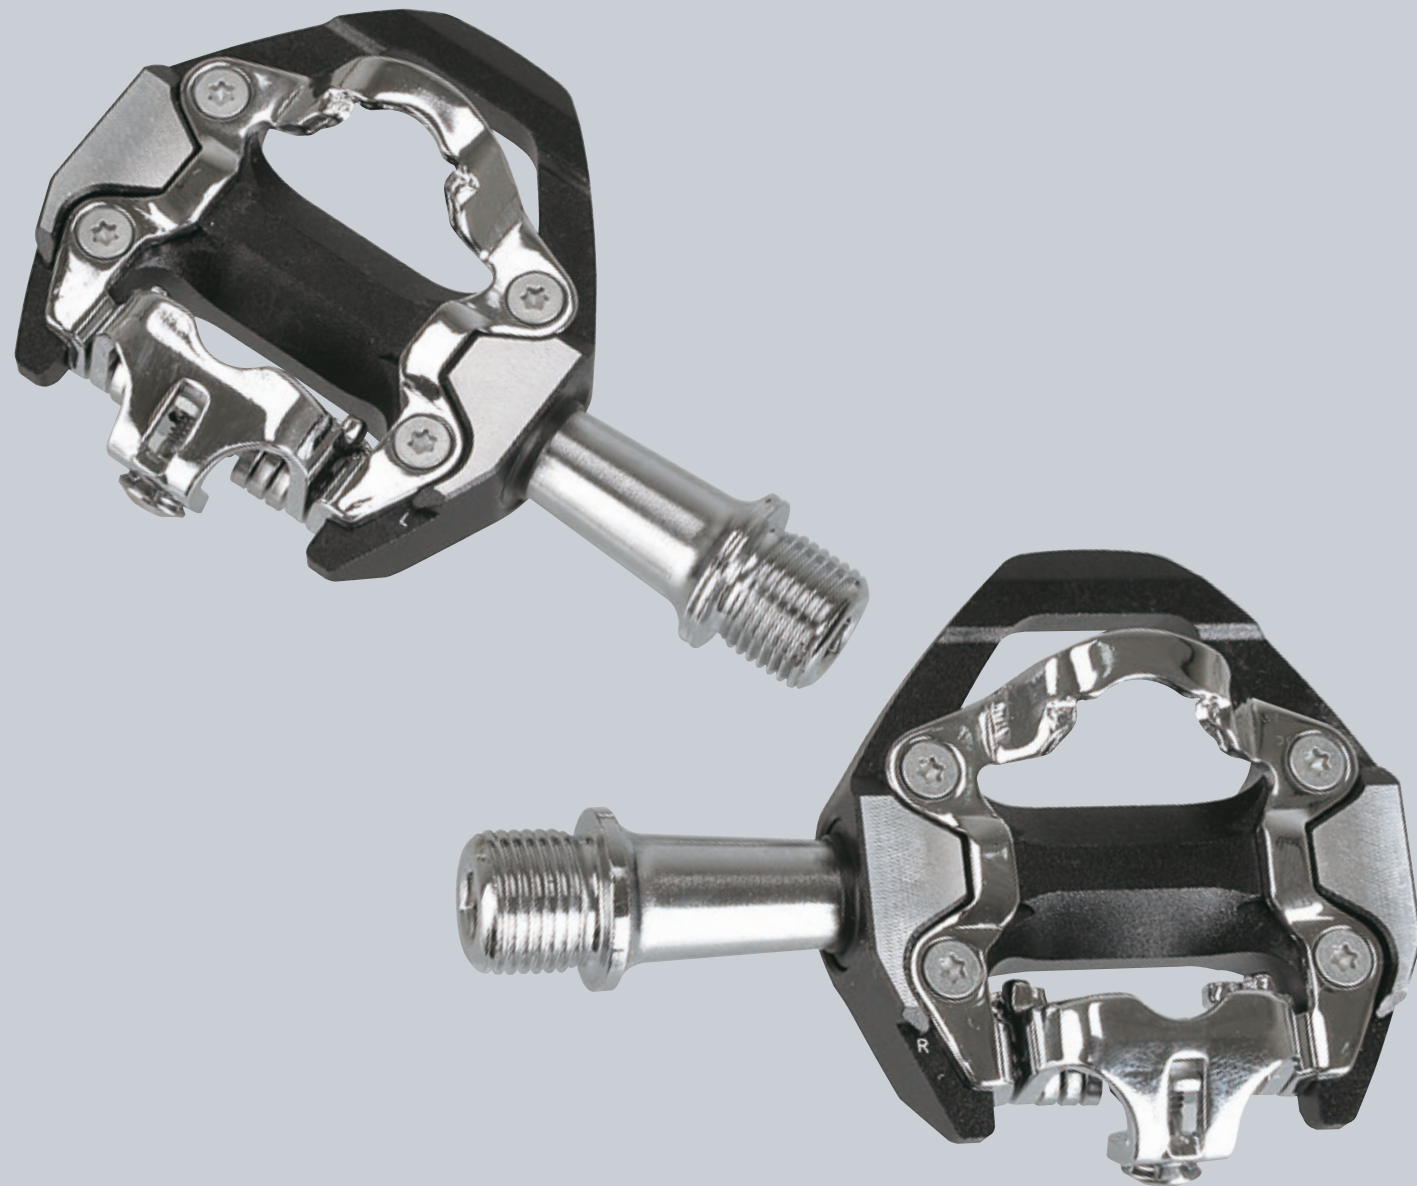

PATENTED



262 g/pr



► E-PR50

ROAD PEDALS

A pedal with a strong extruded-machined body, is built on a rigid, smooth running mechanism consisting of a machined Cr-Mo axle and a slimline dual bearing system.

- Extruded-machined body

Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined 6061 aluminum.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing & sealed.

Bindings Single-sided Cr-Mo, tension adjustable with gauge.

Cleats E-C05F

Size 82 x 66 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.




TRACK

Pedals

EPS-T

EXPERT

PATENTED

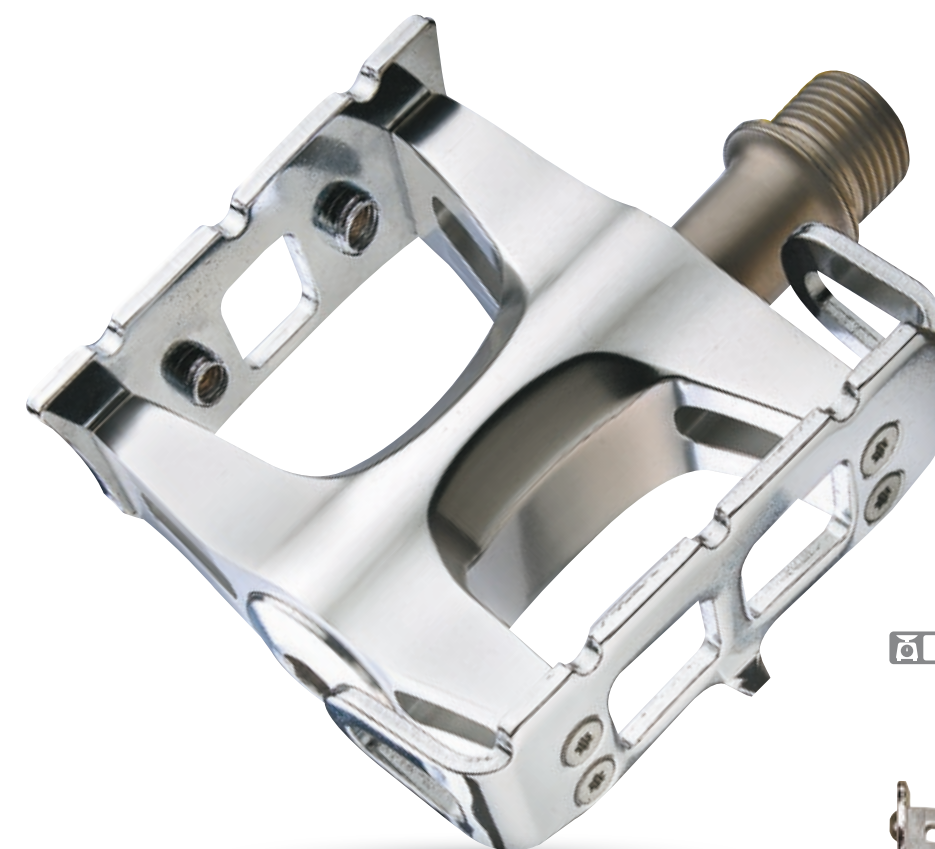

402 g/pr



Options



EMM152

Assembled with toe clip (EMM150/151) & toe strap (EMM152).



Complete track set. Pedal, clips, and straps.

► E-PT12+

TRACK PEDAL SET

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, dual over-sized sealed bearings. Includes pedal, toe clip and toe strap.

- Rigid, machined aluminum body
- Machined Cr-Mo axle
- Extra-strength over-size sealed bearings
- Tough Cr-Mo cage

Interface EPS-T.

- Body** Extruded, CNC-machined 6061 aluminum.
- Cage** CP silver Cr-Mo.
- Axle** Heat-treated, CNC-machined Cr-Mo.
- Bearing** Dual over-sized sealed bearings.
- Options** Steel toe clips, laminated leather straps.
- Cleats** E-C101 (not supplied).
- Size** 89 x 66 mm.



PATENTED



360 g/pc



With optional toe straps attached.



E-MM190



EMM152

EMM152 Twin straps for a more secure, comfortable fit. Very strong laminated leather. Stainless steel buckles. 425mm (16 3/4").

► E-PR107TK



TRACK PEDALS

Clip-in pedal designed specifically for track racing, with an option to attach toe straps for extra binding security. It also features a triple bearing mechanism. A gauge makes precise binding tension adjustment easy.

- Toe strap attachment
- Durable triple bearings

Interface EPS-R (Compatible with Look Keo).
Body Aluminum, ED black.
Axle Heat-treated, CNC-machined Cr-Mo (cartridge).
Bearings LSL bushing, sealed, & needle.
Binding Fiberglass-reinforced thermoplastic, tension adjustable.
Cleats E-BLK11
Size 82 x 82 mm
Compatible with Exustar road shoes, other 3 bolt hole shoes.



► EMM152

TWIN TOE STRAPS

Twin straps for a more secure, comfortable fit.
Very strong laminated leather.
Stainless steel buckles.
425mm (16 3/4")



EMM150



EMM151



EMM150+



EMM151+

► EMM150/EMM151

TOE CLIPS

Steel clips / steel clips with leather for track racing.
M: Euro Mens 37-42 36g/pc (EMM150)
L: Euro Mens 43-46 40g/pc (EMM151)

MTB

Pedals

CHOOSING A MOUNTAIN BIKE PEDAL



GRAVEL

These pedals for all-day riding adventures over mixed terrain, has better mud discharge function and slightly larger contact area.



XC (CROSS COUNTRY)

These all-round double-sided clip-in mountain bike pedals are ideal for riding long distances over a variety of off-road terrain.



ENDURO

Ideal for the speed and excitement of Enduro racing, these double-sided clip-in pedals have an outer platform, allowing you to easily move between clipped in mode and platform mode when trail conditions change.



ALL-MOUNTAIN

Perfect for riding a variety of off-road terrain, these double-sided clip-in pedals have an extra-large outer platform so that you can easily move between clipped in mode and platform mode.



TOURING

These pedals, our most versatile with both a clip-in side and a platform side, are the best choice for touring or commuting.



DOWNHILL

These tough, double-sided pedals with large platforms and grip pins are built for fast, off-road downhill riding.



FREERIDE

Broad, tough grippy BMX pedals built for a style of riding that is very individual but usually involves rough vertical slopes, jumping and other stunts.




PM242^{NEW}

SERIES



ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

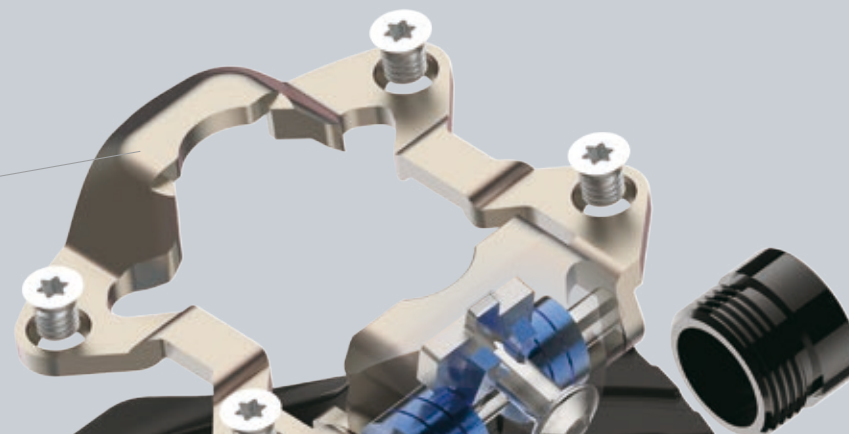

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.




TENSION ADJUSTABLE

Double-sided Cr-Mo, tension adjustable.

PATENTED



400 g/pc

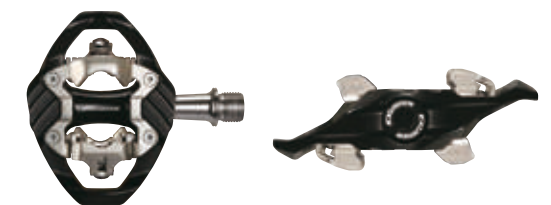

► E-PM242

CLIP-IN PEDALS

A pedal featuring an aluminum body, a Cr-Mo axle and slimline dual bearing system.

- Tension gauge



Interface EPS-M (Compatible with Shimano SPD).

Body Aluminum.

Axle Heat-treated, CNC-machined Cr-Mo.


Bearings LSL bushing & sealed.

Bindings Double-sided Cr-Mo, tension adjustable.

Cleats E-C05F

Size 89 x 90 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

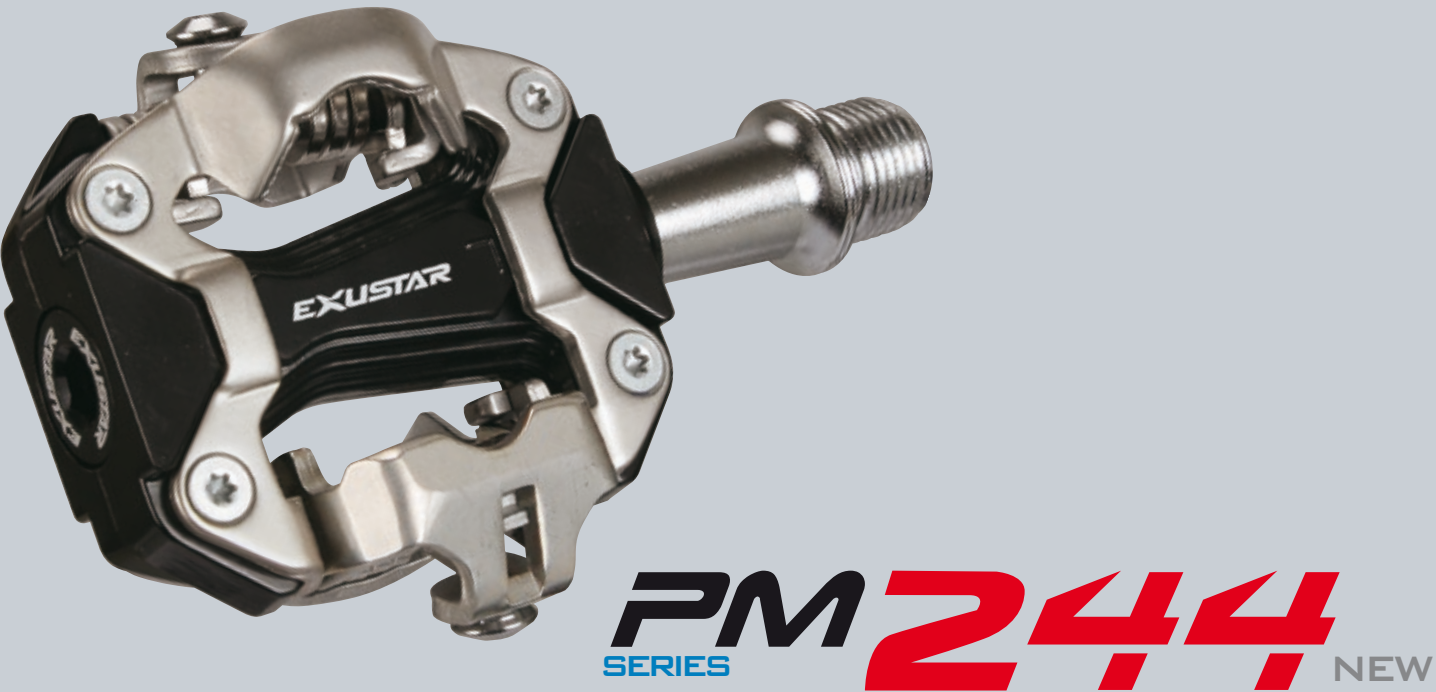

ABRASION GUARD


Screw-on steel plate prevents cleat abrasion on pedal body.

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

TENSION ADJUSTABLE

Double-sided Cr-Mo, tension adjustable.

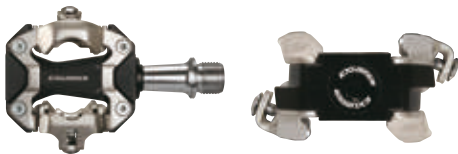

► E-PM244

CLIP-IN PEDALS

A pedal featuring an aluminum body, a Cr-Mo axle and slimline dual bearing system.

- Tension gauge



Interface EPS-M (Compatible with Shimano SPD).

Body Aluminum.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing & sealed.

Bindings Double-sided Cr-Mo, tension adjustable.

Cleats E-C05F

Size 82.5 x 64 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

PM245

SERIES NEW

ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.


TENSION ADJUSTABLE

Double-sided Cr-Mo, tension adjustable.

PATENTED



384 g/pr

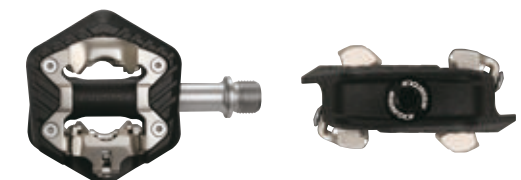

► E-PM245

CLIP-IN PEDALS

A pedal featuring a thermoplastic body, a Cr-Mo axle and slimline dual bearing system.

- Tension gauge

Interface EPS-M (Compatible with Shimano SPD).

Body Engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings DU bushing & sealed.

Bindings Double-sided Cr-Mo, tension adjustable.

Cleats E-C05F

Size 86 x 73 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.





ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

DURABLE BEARINGS


Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.

TENSION ADJUSTABLE

Double-sided Cr-Mo, tension adjustable.

EPS-M (Compatible with Shimano SPD).

PATENTED



Color Option

354 g/pr



E-PM239-BL



Tokyo 2020 Olympics - Women's MTB Race - Izu Mountain Bike Course 41km - 27/07/2021 - Eva Lechner (ITA) - photo Luca Bettini / BettiniPhoto © 2021



Exustar-sponsored rider Eva Lechner competes at the Tokyo Olympics. In celebration, Exustar releases special edition Olympic Games MTB pedals.

E-PM239



CLIP-IN PEDALS

A pedal featuring a thermoplastic body, with Cr-Mo axle, and LSL bushing & sealed bearings.

- Tension gauge



Interface EPS-M (Compatible with Shimano SPD).

Body Engineering thermoplastic.

Axle Heat-treated, CNC-machined Cr-Mo (cartridge).

Bearings LSL bushing & sealed.

Bindings Double-sided Cr-Mo, tension adjustable.

Cleats E-C05F

Size 85 x 64 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

PM222
series
PATENTED



Option
(MOQ 300 pr)



E-PM222TI-BL



E-PM222TI-RD



E-PM222



E-PM222-BL



E-PM222-RD

310 g/pr



E-PM222TI

CNC-MACHINED CLIP-IN PEDALS

Featuring a strong, extruded, CNC body, this pedal is built on a rigid, smooth running mechanism consisting of a titanium axle and a slimline dual bearing system. A gauge makes precise binding tension adjustment easy.

- Extruded, CNC-machined aluminum body
- Abrasion guard
- Titanium axle
- Tension gauge

Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined aluminum, anodized black with stainless steel abrasion guard.

Axle Heat-treated, CNC-machined titanium axle.

Bearings Needle & sealed.

Bindings Double-sided Cr-Mo, tension adjustable with gauge.

Cleats E-C05F

Size 82.2 x 61.6 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

SMALL
CONTACT AREA series
PATENTED



E-PM230

CNC-MACHINED CLIP-IN PEDALS

Featuring a strong, extruded, CNC body, this pedal is built on a rigid, smooth running mechanism consisting of a Cr-Mo axle and a slimline dual bearing system. A gauge makes precise binding tension adjustment easy.

- Extruded, CNC-machined aluminum body
- Tension gauge



Color Options



E-PM230-BL



Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined aluminum body, anodized.

Axle Heat-treated, CNC-machined Cr-Mo axle.

Bearings LSL bushing & sealed.

Bindings Double-sided Cr-Mo, tension adjustable with gauge.

Cleats E-C05F

Size 82 x 63 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

PATENTED



E-PM235-BK

CNC-MACHINED CLIP-IN PEDALS

Featuring a strong, extruded-machined body, this pedal is built on a rigid, smooth running mechanism consisting of a Cr-Mo axle and a slimline dual bearing system.

- Extruded, CNC-machined aluminum body



Color Options



E-PM235-RD



Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined 6061 aluminum body, anodized.

Axle Heat-treated, CNC-machined Cr-Mo axle.

Bearings LSL bushing & sealed.

Binding Double-sided Cr-Mo.


Cleats E-C01F

Size 82.5 x 56 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

SMALL
CONTACT AREA series

PATENTED

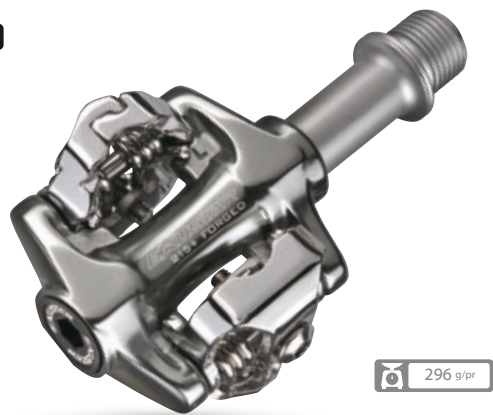

296 g/pr



Options



E-PM215+-HBK



E-PM215+Ti-HBK

232 g/pr

E-PM215+

FORGED CLIP-IN PEDALS

A pedal featuring a strong, forged aluminum body, and a slimline dual bearing system.

- Forged aluminum body

Interface EPS-M (Compatible with Shimano SPD).

Body Forged aluminum, anodized.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing & sealed.

Bindings Double-sided pressed steel, tension adjustable.

Cleats E-C01F

Size 81 x 55 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.



PATENTED



324 g/pr



Option



E-PM213-WH

332 g/pr

E-PM213

CLIP-IN PEDALS

A pedal featuring an aluminum body, a Cr-Mo axle and a slimline dual bearing system.

- Liquid-coated aluminum body
- Tension gauge

Interface EPS-M (Compatible with Shimano SPD).

Body Liquid-coated aluminum.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing & sealed.

Binding Double-sided Cr-Mo, tension adjustable.

Cleats E-C05F

Size 82 x 65 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.



PATENTED



360 g/pr

Option
(MOQ 300 pr)



E-PM228-BL



E-PM228

CNC-MACHINED CLIP-IN PEDALS

Featuring a strong, extruded, CNC body, this pedal is built on a rigid, smooth running mechanism consisting of a Cr-Mo axle and a slimline dual bearing system.

- Extruded-machined aluminum body.

Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined aluminum body, anodized black.

Axle Heat-treated, CNC-machined Cr-Mo axle.

Bearings LSL bushing & sealed.

Binding Double-sided Cr-Mo, tension adjustable.

Cleats E-C05F

Size 86 x 90 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.



ADVANCED

FULL
CONTACT AREA series
PATENTED



516 g/pr



E-PM823

CLIP-IN PEDALS

Low profile, extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Low profile
- Extruded-machined aluminum body
- Machined Cr-Mo axle

Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined aluminum, replaceable grip pins, anodized.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing, & sealed.

Bindings Double-sided Cr-Mo, adjustable tension.

Cleats E-C05F

Size 112.5 x 100.5 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

PATENTED



498 g/pr



E-PM824

CLIP-IN PEDALS

Low profile, extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Low profile
- Extruded-machined aluminum body
- Machined Cr-Mo axle

Interface EPS-M (Compatible with Shimano SPD).

Body Extruded, CNC-machined aluminum, replaceable grip pins, anodized.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing & sealed.

Binding Double-sided Cr-Mo, adjustable tension.

Cleats E-C05F

Size 112.5 x 101 mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.


COMP

FULL
CONTACT AREA series
PATENTED



556 g/pr

Option



E-PM820-1
SIDE A



SIDE B

500 g/pr



E-PM820



CLIP-IN PEDALS (Double-sided binding)

Low profile pedal with a Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Low profile

Interface EPS-M (Compatible with Shimano SPD).

Body ED black aluminum, ED black, replaceable grip pins.

Axle Heat-treated, CNC-machined Cr-Mo.


Bearings LSL bushing & sealed.

Bindings Double-sided Cr-Mo, adjustable tension.


Cleats E-C05F

Size 109 x 105mm

Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

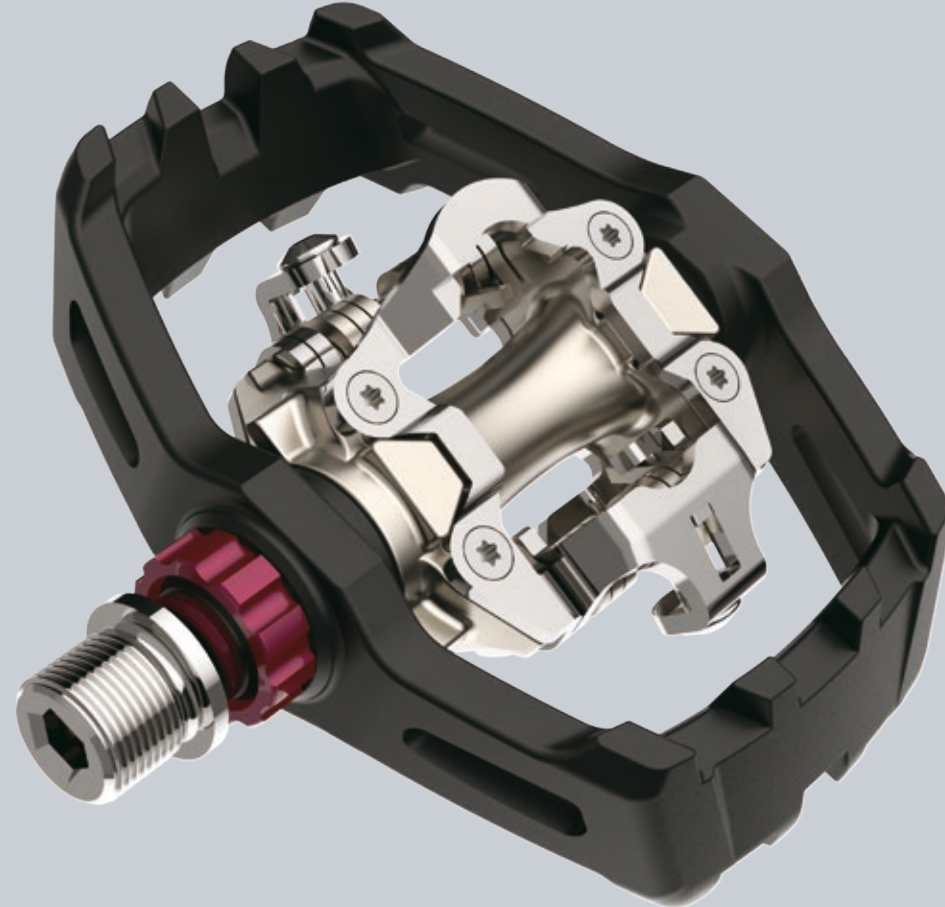

PM825
SERIES

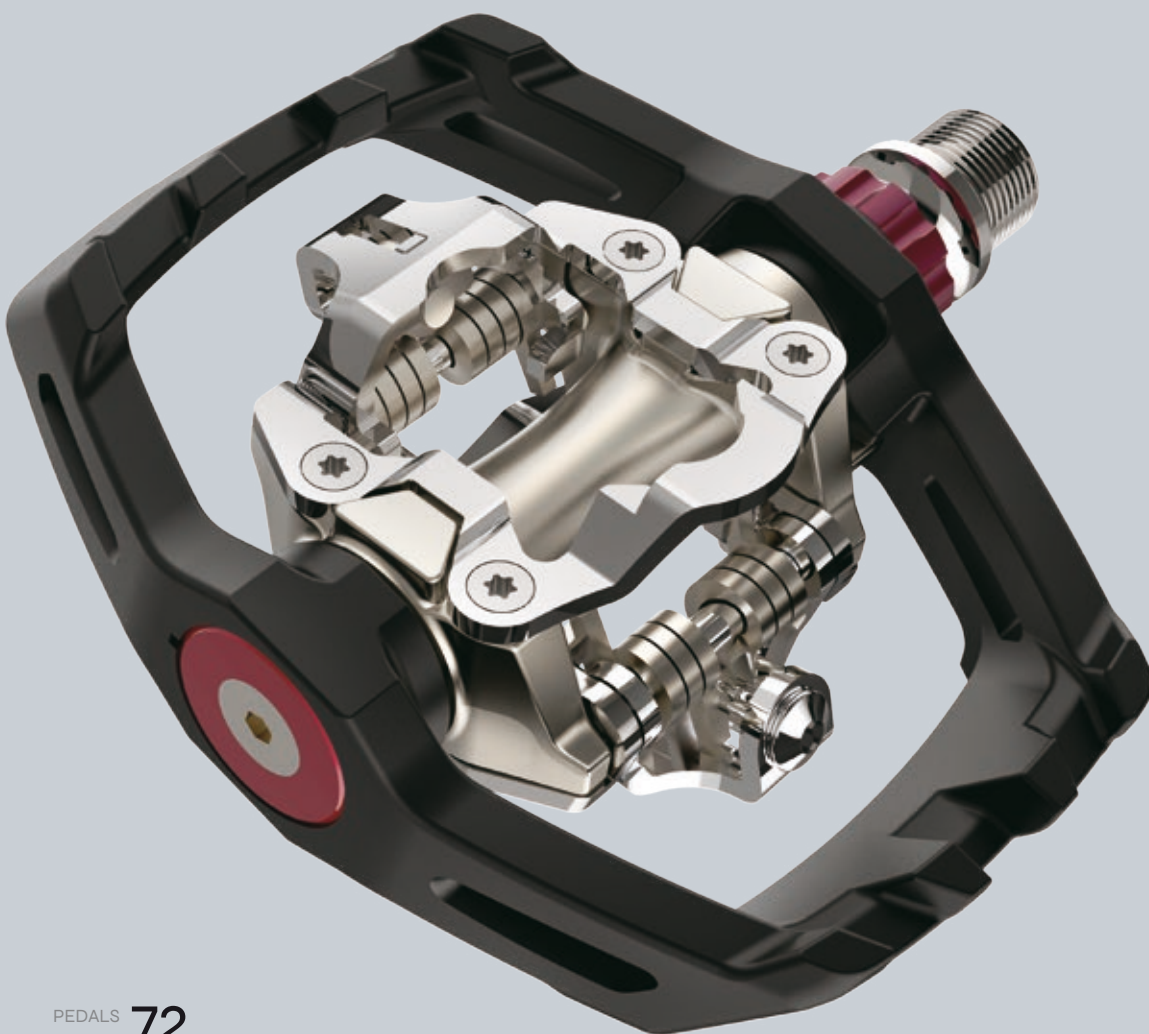


ABRASION GUARD

Screw-on steel plate prevents cleat abrasion on pedal body.

TENSION ADJUSTABLE

Double-sided Cr-Mo, tension adjustable.

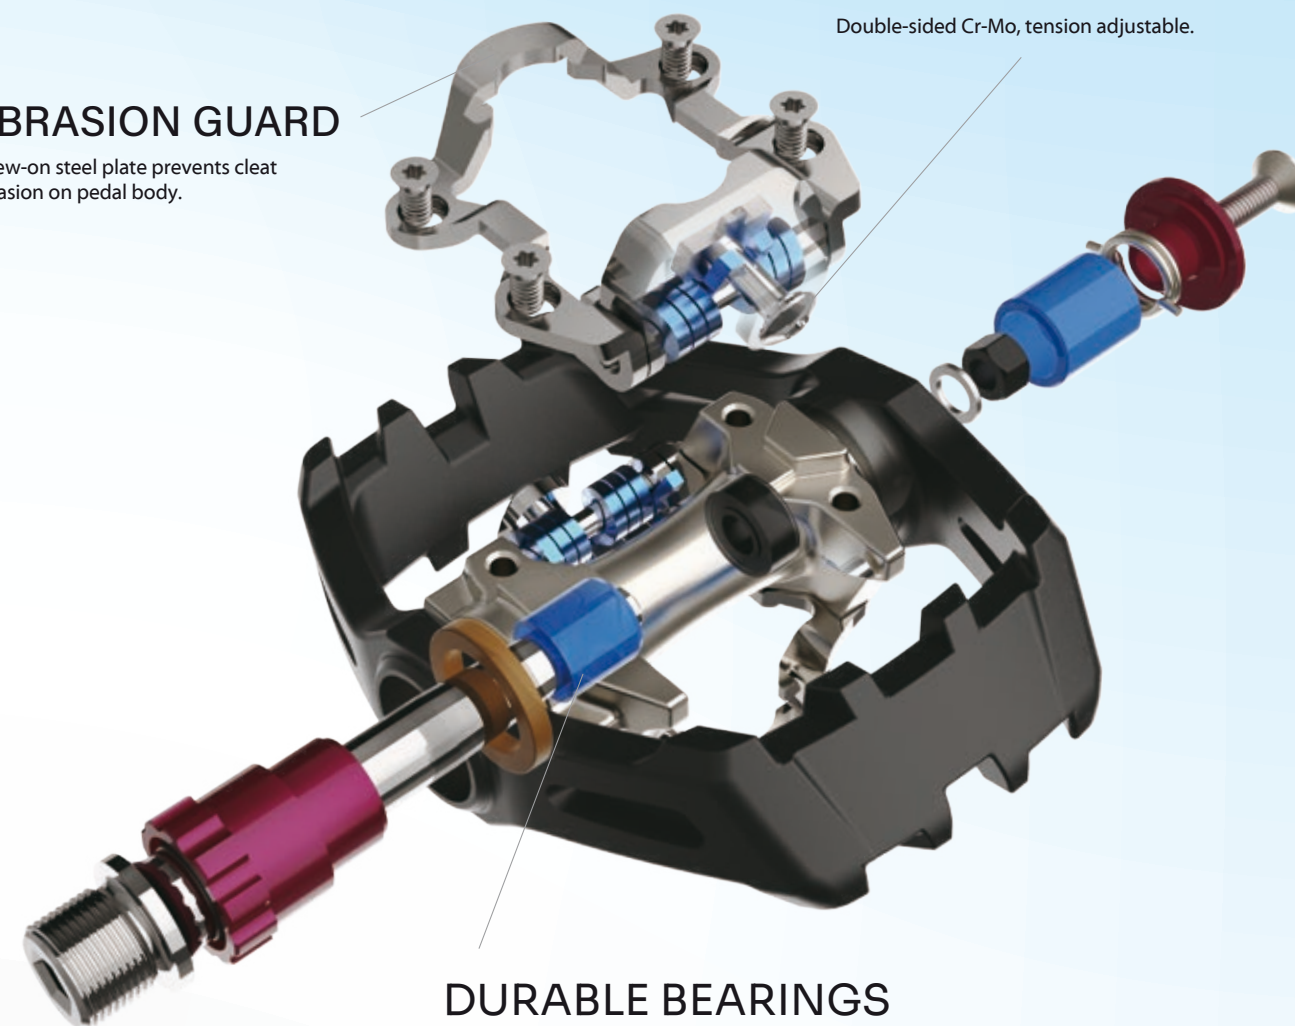

DURABLE BEARINGS

Durable bearings placed at key stress points along the axle ensure an extremely strong, stable, and durable pedal.



EASY ENTRY POP-UP BINDING

A pop-up binding for easy cleat engagement.



FULL
CONTACT AREA series
PATENTED




460 g/pr

Color Options



E-PM825-TRBL E-PM825-TRWH

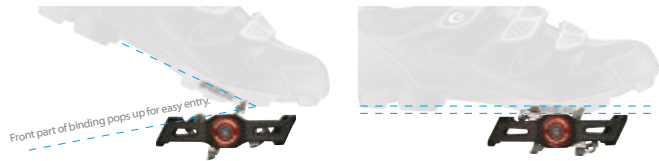

► E-PM825




CLIP-IN PEDALS
A pedal featuring a pop-up binding for easy cleat engagement. This pedal is built on a rigid, smooth running mechanism consisting of a Cr-Mo axle and a slimline dual bearing system.

- Easy entry pop-up binding

Interface	EPS-M (Compatible with Shimano SPD).
Body	Die-cast aluminum body, engineering thermoplastic platform.
Axle	Heat-treated, CNC-machined Cr-Mo axle (cartridge).
Bearings	LSL bushing & sealed.
Binding	Double-sided Cr-Mo, spring-loaded, tension adjustable with gauge.
Cleats	E-C05F
Size	94.5 x 106 mm
Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.	

PATENTED

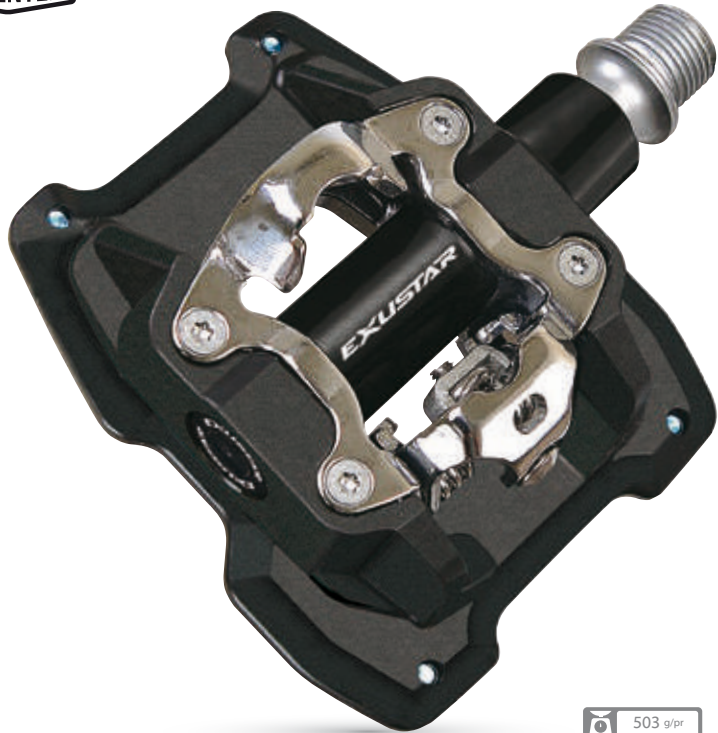

503 g/pr

SIDE A



SIDE B

Option

3M Anti-slip replacable patch



503 g/pr

E-PM831-1

► E-PM831



DUAL-INTERFACE PEDALS
A versatile pedal that features a dual-interface:

1. a clip-in binding on one side for cleated shoes.
2. a simple platform on the other for casual shoe use.

Interface	EPS-M (Compatible with Shimano SPD). Platform.
Body	Aluminum.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Bindings	Single-sided Cr-Mo, tension adjustable.
Cleats	E-C05F
Size	92 x 89 mm
Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.	




PEDAL TECHNOLOGY



Side A:
A clip-in binding on one side for cleated shoes
(Compatible with Shimano **SPD**)

TRIPLE LAYER PLATFORM

A platform that can be attached to this Dual Interface pedals. It allows ordinary sports shoes to be used with clip-in pedals.

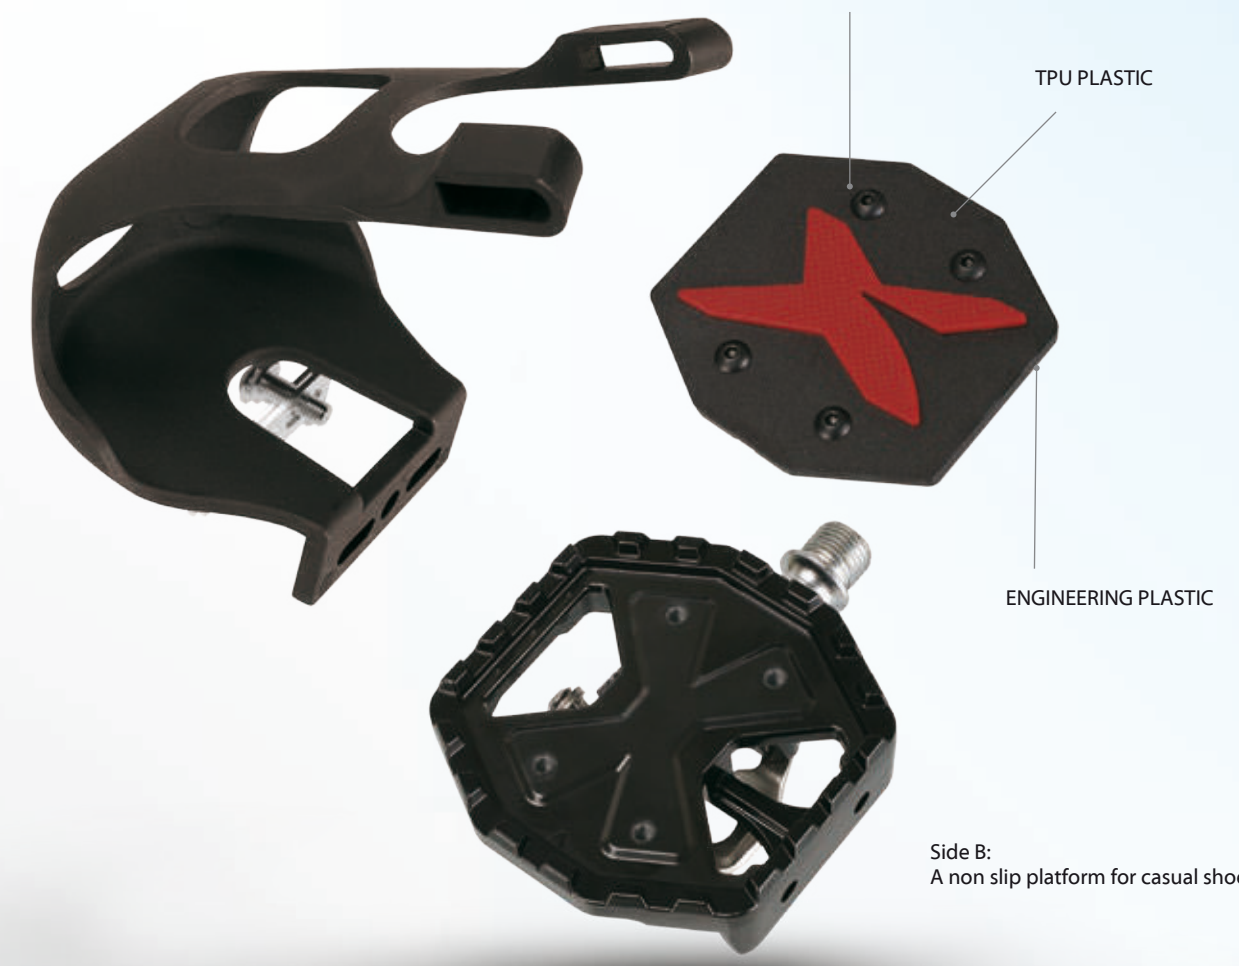


Side B:
A non slip platform for casual shoe use

PM833
SERIES
PATENTED



579 g/pr

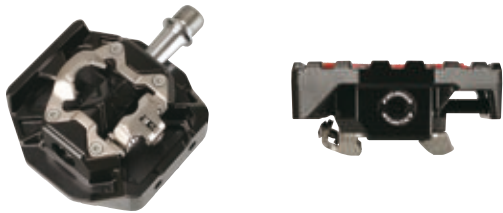

E-PM833



DUAL-INTERFACE PEDALS


Versatile pedal featuring a triple-interface: 1. a clip-in binding on one side for cleated shoes, and on the other, 2. a non slip platform for casual shoe use. Equipped with an aluminum body, Cr-Mo axle, and LSL bushing & sealed bearings.

- Interface** EPS-M (Compatible with Shimano SPD), Platform.
 - Body** Aluminum.
 - Axle** Heat-treated, CNC-machined Cr-Mo.
 - Bearings** LSL bushing & sealed.
 - Binding** Single-sided Cr-Mo.
 - Cleats** E-C05F
 - Other** Reflectors included.
 - Size** 97 x 75 mm (w/o toe clip)
- Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

PATENTED



542 g/pr

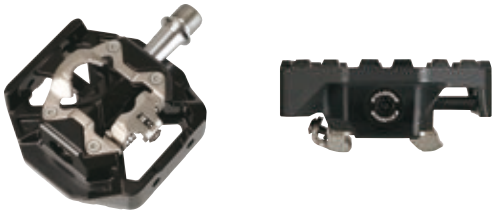

E-PM832



DUAL-INTERFACE PEDALS

Versatile pedal featuring a triple-interface: 1. a clip-in binding on one side for cleated shoes, and on the other, 2. a non slip platform for casual shoe use. Equipped with an aluminum body, Cr-Mo axle, and LSL bushing & sealed bearings.

- Interface** EPS-M (Compatible with Shimano SPD), Platform.
 - Body** Aluminum.
 - Axle** Heat-treated, CNC-machined Cr-Mo.
 - Bearings** LSL bushing & sealed.
 - Bindings** Single-sided Cr-Mo.
 - Cleats** E-C05F
 - Other** Reflectors included.
 - Size** 97 x 75 mm (w/o toe clip)
- Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.



SPORT



SIDE A

SIDE B

333 g/pr

E-PM811



DUAL-INTERFACE PEDALS

A versatile pedal that features a dual-interface: 1. a clip-in binding on one side for cleated shoes, and, 2. a simple platform on the other for casual shoe use. Equipped with a thermoplastic body, Cr-Mo axle, and LSL bushing & sealed bearings.

- Interface** EPS-M (Compatible with Shimano SPD), Platform.
- Body** Engineering thermoplastic.
- Axle** Heat-treated, CNC-machined Cr-Mo (cartridge).
- Bearings** LSL bushing, & sealed.
- Bindings** Single-sided Cr-Mo, tension adjustable.
- Cleats** E-C05F
- Size** 95 x 83 mm
- Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.



EXPERT



SIDE A

SIDE B

334 g/pr


E-PM816



DUAL-INTERFACE PEDALS

A versatile pedal that features a dual-interface: 1. a clip-in binding on one side for cleated shoes, and, 2. a simple platform on the other for casual shoe use. Equipped with a thermoplastic body, Cr-Mo axle, and LSL bushing & sealed bearings.

- Interface** EPS-M (Compatible with Shimano SPD), Platform.
- Body** Engineering thermoplastic.
- Axle** Heat-treated, CNC-machined Cr-Mo (cartridge).
- Bearings** LSL bushing & sealed.
- Binding** Single-sided Cr-Mo, tension adjustable.
- Cleats** E-C05F
- Size** 100 x 95 mm
- Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.

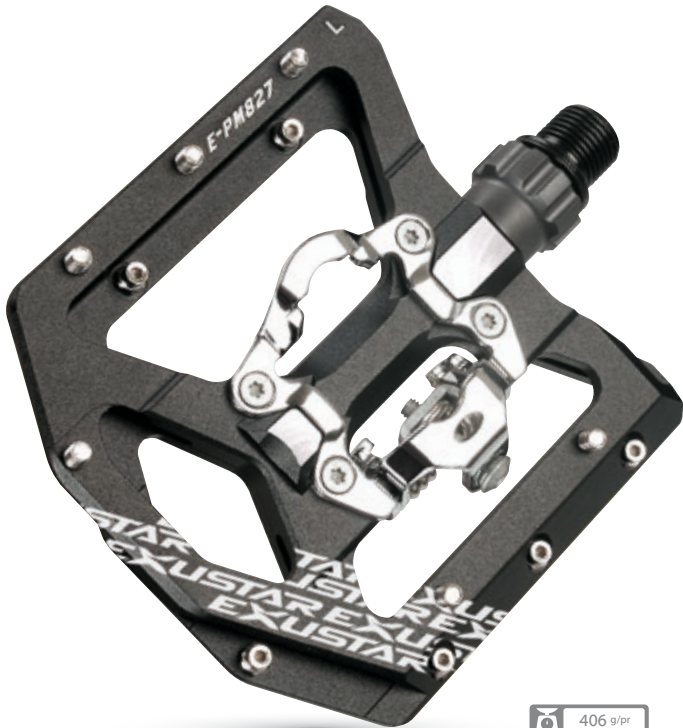

SIDE A



SIDE B

406 g/pr



► E-PM827



DUAL-INTERFACE PEDALS

Low profile, extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Low profile
- Single side cleat-in function
- Extruded-machined aluminum body
- Machined Cr-Mo axle

Interface	EPS-M (Compatible with Shimano SPD).
Body	Extruded, CNC-machined aluminum, replaceable grip pins, anodized.
Axle	Heat-treated, CNC-machined Cr-Mo (cartridge).
Bearings	Tubular LSL bearings (integrated cartridge).
Binding	Single-sided Cr-Mo, adjustable tension.
Cleats	E-C05F
Size	108.5 x 100 mm
Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.	

MULTI FUNCTION series



SIDE A



SIDE B

330 g/pr

► E-PM86



TRIPLE-INTERFACE PEDALS

Versatile pedal featuring a triple-interface: 1. a clip-in binding on one side for cleated shoes, and on the other, 2. a simple platform for casual shoe use, 3. or add a toe clip and cage to the platform for increased pedaling efficiency. Equipped with an aluminum body and cage, Cr-Mo axle, and LSL bushing & sealed bearings.

Interface	EPS-M (Compatible with Shimano SPD), Platform + Toe clip.
Body	Aluminum.
Cage	Aluminum, black anodized.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Bindings	Single-sided Cr-Mo.
Cleats	E-C05F
Other	Toe clip and strap attachable. Reflectors included.
Size	105 x 66 mm
Compatible with Exustar 2 bolt shoes, other 2 bolt hole shoes.	

BMX

Pedals





Color Options



► E-PB572



CNC-MACHINED BMX PEDALS

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Extruded, CNC-machined body

Body	6061 aluminum, CNC-machined body, anodized, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Size	117 x 116mm



Color Options



► E-PB573



BMX PEDALS

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Extruded, CNC-machined body

Body	6061 aluminum, CNC-machined body, anodized, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Size	105.8 x 116mm



503 g/pr



► E-PB74



BMX PEDALS

Aluminum body, non-slip platform with a machined Cr- Mo axle.

- Non-slip platform

Body	Aluminum.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Other	Reflectors included.
Size	114 x 103 mm

PATENTED



396 g/pr

Color Options



E-PB569-GR



E-PB569-RD



E-PB569-TB



► E-PB569



BMX PEDALS

Thermoplastic pedal featuring a CNC-machined axle, and DU bushing and sealed bearings.

Body	Engineering thermoplastic, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearing	DU bushing & sealed.
Size	117 x 116 mm.

PATENTED




479 g/pr

Color Options



E-PB570 E-PB570-RD

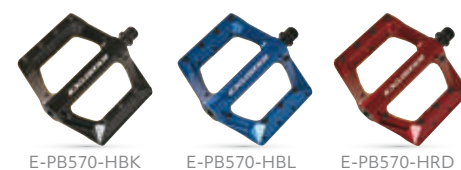

E-PB570-HBK E-PB570-HBL E-PB570-HRD



► E-PB570-BL



CNC-MACHINED BMX PEDALS

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Extruded, CNC-machined body

Body	6061 aluminum, CNC-machined body, anodized, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Size	117 x 116 mm

PATENTED



482 g/pr

Color Options



E-PB571 E-PB571-YL E-PB571-BL



► E-PB571-RD



BMX PEDALS

Die-cast aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

Body	Die-cast aluminum, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Size	117 x 116 mm



426 g/pr

E-PB562-BL

Color Options
(MOQ 300 pr)



► E-PB562



CNC-MACHINED BMX PEDALS

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and triple LSL bearing mechanism.


- Extruded, CNC-machined body

Body	6061 aluminum, CNC-machined body, anodized, replaceable grip pins
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	Triple LSL bearings.
Size	105.5 x 108 mm



434 g/pr

Color Options
(MOQ 300 pr)

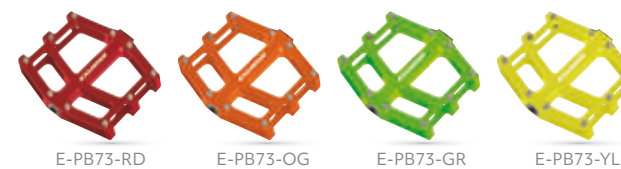

Standard



Option



► E-PB73



BMX PEDALS

Aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

Body	Die-cast aluminum, built-in grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Size	117 x 114 mm




366 g/pt

Color Options
(MOQ 300 pr)



E-PB525-HRD



E-PB525-HBL



E-PB525-HOG



E-PB525-HAG

► E-PB525



BMX PEDALS

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Extruded, CNC-machined body

Body 6061 aluminum, CNC-machined body, anodized, replaceable grip pins.

Axle Heat-treated, CNC-machined Cr-Mo.

Bearings LSL bushing & sealed.

Size 103 x 100 mm





576 g/pr

► E-PB555



CNC-MACHINED BMX PEDALS


Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip grip pins and a slimline dual bearing mechanism.

- Extruded, CNC-machined body

Body	6061 aluminum, CNC-machined body, anodized, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing, & sealed.
Size	113 x 105 mm




312 g/pr



E-PB557-GR



E-PB557-RD



E-PB557-BL



► E-PB557



SLIM PROFILE CNC-MACHINED BMX PEDALS

Low stack height, extruded-machined aluminum pedal featuring a machined Cr-Mo axle, tubular LSL bearings, anti-slip surface and grip pins.

- Extruded, CNC-machined body
- Low stack height
- Tubular LSL bearings

Body	Low stack height, 6061 aluminum, CNC-machined body, anodized, replaceable grip pins.
Axle	Heat-treated, CNC-machined Cr-Mo (cartridge).
Bearings	Tubular LSL bearings (integrated cartridge).
Size	113 x 105 mm

URBAN

Pedals



273 g/pr

Option



E-PC951-1

281 g/pr



► E-PC951



PLATFORM PEDALS

An all-round pedal suitable for a variety of bikes. Thermoplastic body with a CNC-machined axle, and DU bushing and sealed bearings.

Body	Engineering thermoplastic.
Cage	Engineering thermoplastic.
Axle	Heat-treated, CNC-machined Cr-Mo. Uses 6 mm Allen key.
Bearings	DU bushing & sealed.
Other	Toe clip and strap attachable. Reflectors included.
Size	117 x 116 mm.



Option



E-PC950



► E-PC950-BK



ANTI-SLIP URBAN PEDALS

A pedal featuring a thermoplastic body, with a machined Cr-Mo axle, anti-slip surface.

- Engineering thermoplastic body
- Anti-slip surface

Body	Engineering thermoplastic , anti-slip surface.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	DU bushing & sealed.
Size	104x 78 mm



► E-PC945



ANTI-SLIP URBAN PEDALS

Extruded-machined aluminum pedal featuring a machined Cr-Mo axle, anti-slip surface.

- Extruded, CNC-machined body
- Anti-slip surface

Body	6061 aluminum, CNC-machined body, anodized, anti-slip surface.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	LSL bushing & sealed.
Size	104 x 78 mm

INDOOR

Pedals












Axle

Available

Oversize axle



Oversize sealed & needle bearings.


 E-PS7	 E-PS8	 E-PS9	 E-PS10	 E-PS11	 E-PS12	 E-PS13	 E-PS207	 E-PS815-C8	 E-PS816-C8	 E-PS817-C8
 E-PS7SSP				 E-PS11SSP	 E-PS12SSP	 E-PS13SSP	 E-PS207SSP			

EP5X ISX_b

ISX_b axle



Over size axle with ISX_b drive system.

 E-PS7 ISXb	 E-PS8 ISXb	 E-PS9 ISXb	 E-PS10 ISXb	 E-PS11 ISXb	 E-PS12 ISXb	 E-PS13 ISXb		 E-PS815-C8 ISXb	 E-PS816-C8 ISXb	 E-PS817-C8 ISXb
---	---	--	--	--	--	--	--	--	--	--

EP5X ISX_s

Supersize axle



Supersize axle and anti-loosening axle device. Quad LSL bearings.

		 E-PS9 ISXs		 E-PS11 ISXs						
--	--	--	--	--	--	--	--	--	--	--

PEDAL TECHNOLOGY



FULL CONTACT BODY

IMPROVED TENSION ADJUSTER

New design prevents bolt from coming loose and separating from the pedal if loosened too much.

FULL CONTACT BODY


Increased contact area (62 mm wide) between pedal body and cleat ensures extra power, support, and stability. Interface also enables easier cleat engagement.



AXLES & BEARINGS


OVER-SIZED NEEDLE BEARINGS

Large diameter needle bearings are used on pedals with over-sized axles (such as indoor pedals, where strength is paramount). Needle bearings are very smooth running.

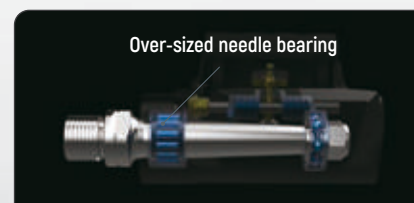

NEEDLE BEARINGS

Needle bearings are used to reduce friction, and increase contact area still allowing a slim axle profile.

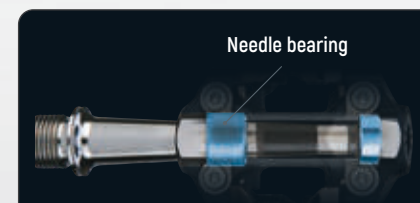

REMOVABLE SHOE PLATFORM

A platform that can be attached to many of our Dual Interface pedals. It allows ordinary sports shoes to be used with clip-in pedals.

OVERSIZE BEARING


These bearings are oversized for maximum strength and durability. Designed for the toughest fitness center conditions.

OVERSIZE AXLE



IMPROVED TENSION ADJUSTER

New design prevents bolt from coming loose and separating from the pedal if loosened too much.



Dual Interface

OVERSIZE AXLE

Designed for the toughest fitness center conditions, these axles are oversized for maximum strength and durability.



PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).

540 g/pr



EMM208-BP



Oversize axle
Oversize sealed & needle bearings.



Tension Gauge
Integral binding tension indicator makes it easy for riders to set and adjust tension.

► E-PS7



DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	87 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform

481 g/pr

Option



E-PS7SS1
Side B: No platform



EMP344



Oversize axle
Oversize sealed & needle bearings.

► E-PS7SSP



DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	87 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).

560 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS8



DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	87 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform

496 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS8SSP



DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	87 x 94 mm

PATENTED

EXPERT



524 g/pr

EPS-R (Compatible with Look Delta).



Oversize axle
Oversize sealed & needle bearings.



► E-PS9



INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface EPS-R (Compatible with Look Delta).
Body Aluminum, nickel plated & ED black, corrosion resistant.
Axle Heat-treated, oversize CNC-machined Cr-Mo.
Bearings Oversize sealed & needle.
Binding EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats E-ARC1
Size 88 x 94 mm

PATENTED

EXPERT



516 g/pr

EPS-R (Compatible with Look Delta).



Oversize axle
Oversize sealed & needle bearings.



► E-PS10



INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.


- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface EPS-R (Compatible with Look Delta).
Body Aluminum, nickel plated & ED black, corrosion resistant.
Axle Heat-treated, oversize CNC-machined Cr-Mo.
Bearings Oversize sealed & needle.
Bindings EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats E-ARC1
Size 88 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).

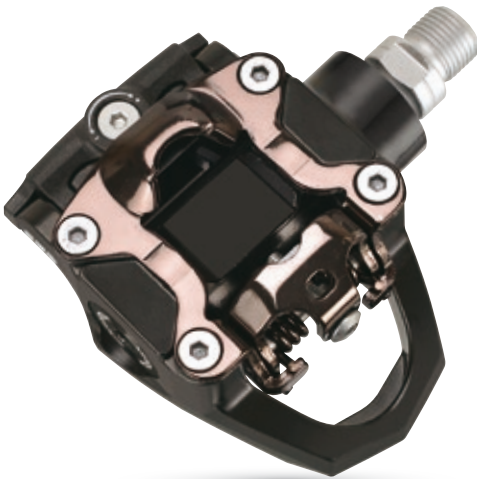

SIDE B: EPS-M (Compatible with Shimano SPD).

688 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM350-BP-AY

E-PS11



DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	89 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform

606 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMP391

E-PS11SSP



DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	89 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).

573 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS12



DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, oversize sealed & needle bearings and an abrasion guard. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard

Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	88 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform

505 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS12SSP



DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, oversize sealed & needle bearings and an abrasion guard. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard

Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm

PATENTED



SIDE A: EPS-SL (Compatible with Shimano SPD-SL).



SIDE B: EPS-M (Compatible with Shimano SPD).

594 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS13



DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage , and an abrasion guard.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard

Interface	EPS-SL (Compatible with Shimano SPD-SL). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	Shimano SPD-SL-style: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-RSL3 H1 & E-C05F
Size	88 x 94 mm

PATENTED



SIDE A: EPS-SL (Compatible with Shimano SPD-SL).



SIDE B: Plastic platform

505 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS13SSP



DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage , and an abrasion guard.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard

Interface	EPS-SL (Compatible with Shimano SPD-SL).
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	Shimano SPD-SL-style: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-RSL3 H1
Size	88 x 94 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Keo).



SIDE B: EPS-M (Compatible with Shimano SPD).

530 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

► E-PS207



DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Keo). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC11+ & E-C05F
Size	87 x 90 mm

PATENTED



SIDE A: EPS-R (Compatible with Look Keo).



SIDE B: Plastic platform

478 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMP344

► E-PS207SSP



DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Keo).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC11+
Size	87 x 90 mm

PATENTED



SIDE A: Toe clips and straps.



SIDE B: EPS-M (Compatible with Shimano SPD).

632 g/pr

Options



Side A: EPS-M (Compatible with Shimano SPD).



SIDE B: Platform pedals



EMM208-BP



Oversize axle
Oversize sealed & needle bearings.

► E-PS815-C8



INDOOR PEDALS

A strong, durable indoor pedal. Featuring an oversize axle and sealed & needle bearings. Interface allows use with: 1. Toe clips and straps. 2. EPS-M (Compatible Shimano MTB system).

- Extra-strength oversize bearings
- Oversize axle

Interface	Toe clips and straps + EPS-M (Compatible with Shimano SPD).
Body	Aluminum.
Cage	Aluminum, ED black.
Axle	Oversize heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Other	Also compatible with conventional bicycles (outside use).
Size	113 x 145 mm

PATENTED



SIDE A: Platform + Toe clip attachable.



SIDE B: EPS-M (Compatible with Shimano SPD).

880 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

► E-PS816-C8



INDOOR PEDALS

A strong, durable and versatile indoor pedal. Featuring an oversize axle and sealed & needle bearings and a robust mechanism. Interface allows use with: 1. EPS-M (Compatible Shimano MTB system). 2. Platform pedals. 3. Toe clips and straps.

- Oversize axle
- Oversize bearings

Interface	Toe clips and straps + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, ED black.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Size	98 x 115 mm (w/ toe clip 98 x 165 mm)

PATENTED

ADVANCED



SIDE A: Platform + Toe clip attachable.



SIDE B: EPS-M (Compatible with Shimano SPD).

782 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

► E-PS817-C8



INDOOR PEDALS

A strong, durable indoor pedal. Featuring an oversize axle and sealed & needle bearings. Interface allows use with: 1. EPS-M (Compatible with Shimano SPD). 2. Platform pedals. 3. Toe clips and straps.

- Extra-strength oversize bearings
- Oversize axle


Interface	EPS-M (Compatible with Shimano SPD). Platform pedals. Toe clips and straps.
Body	Aluminum. ED Black
Axle	Oversize heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Other	Also compatible with conventional bicycles (outside use).
Size	97.5 x 85 mm



SUPERSIZE AXLE TECHNOLOGY

- Supersize
- Anti-loosen device
- Extra-strong and durable
- Heat-treated
- CNC-machined Cr-Mo
- Supersize quad LSL bushing bearings


SUPERSIZE QUAD LSL BUSHING BEARINGS

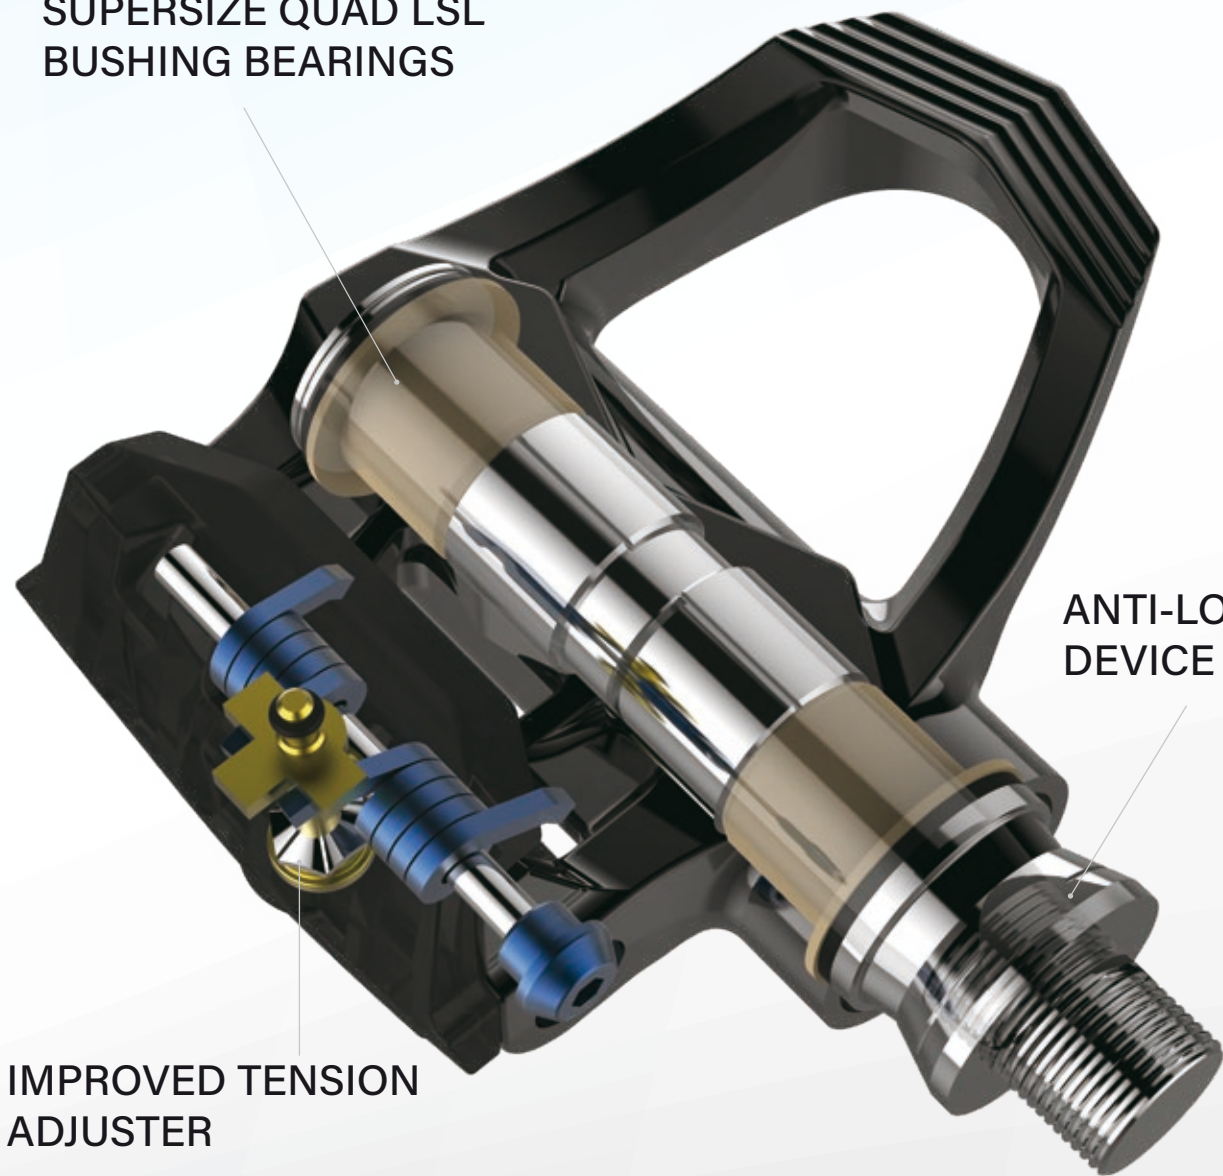

ANTI-LOOSEN DEVICE

IMPROVED TENSION ADJUSTER

Special design prevents bolt from coming loose and separating from the pedal if loosened too much.

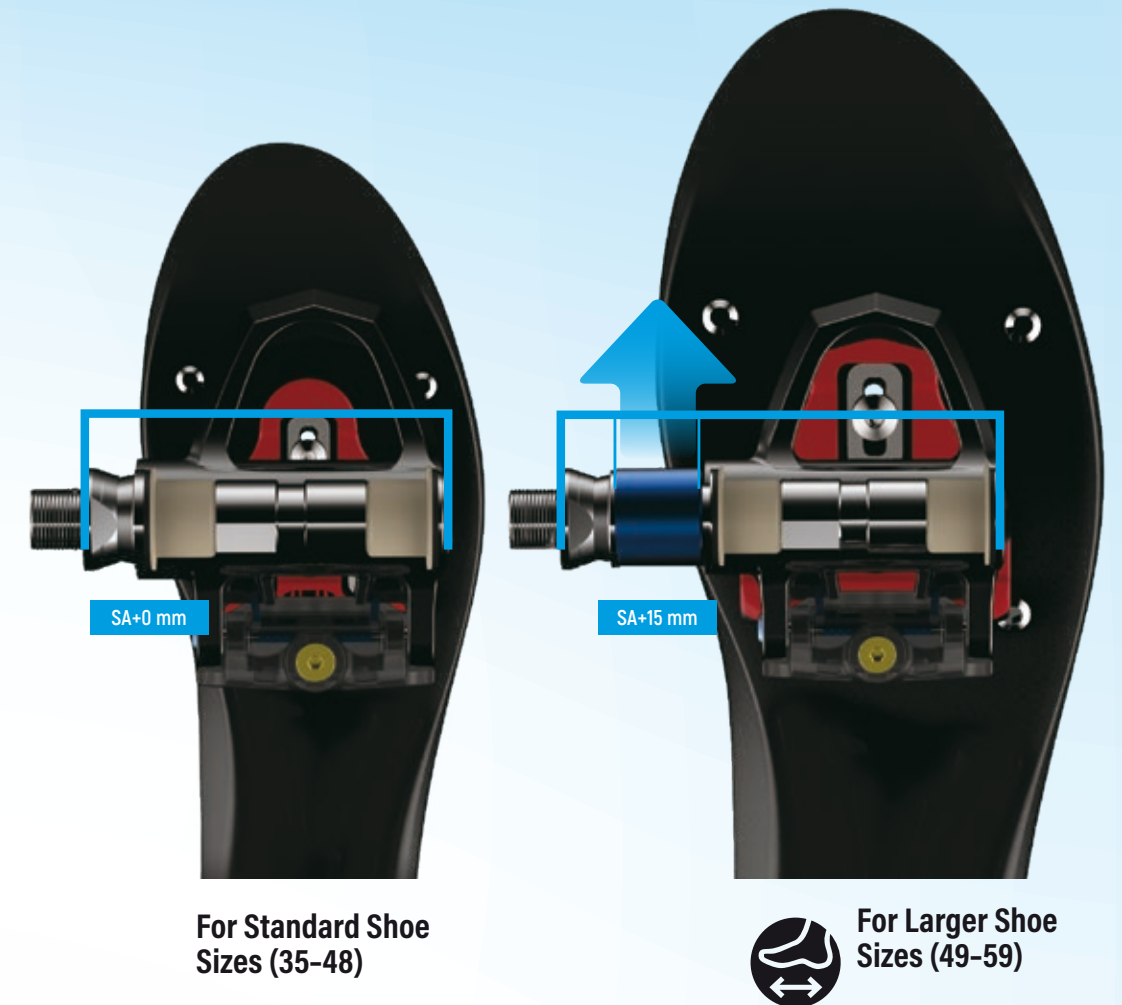


For Standard Shoe Sizes (35-48)

For Larger Shoe Sizes (49-59)

FOUR DIFFERENT LENGTHS

These can also be retrofitted to certain models of Exustar indoor pedals. In some cases, it may be best to consult with a professional bike fitter before using non-standard axles.

4 LENGTH OPTIONS

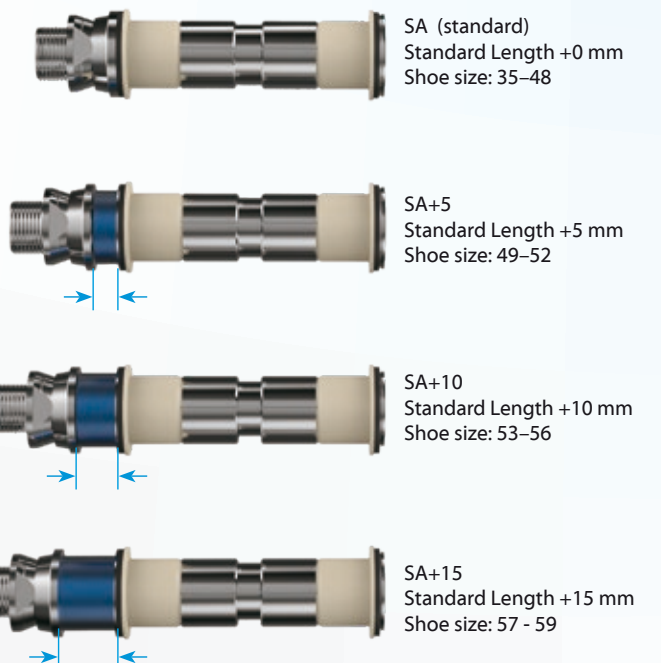

SUPERSIZE AXLES

4 SUPERSIZE LENGTH OPTIONS (Q Factor options)

Four different axle length options allow for varying the Q Factor (the distance between the left and right foot when pedaling). This enables a much higher level of customization of pedal and shoe setup. It is perfect for large shoe sizes and may help cyclists with other biomechanical bike fitting issues.

PATENTED



655 g/pr



EPS-R (Compatible with Look Delta).

E-PS9SA

INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device

Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm



PATENTED



645 g/pr



EPS-R (Compatible with Look Delta).

E-PS10SA

INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device

Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	89 x 94 mm



PATENTED



817 g/pr



EMM350-BP-AY

SIDE A : EPS-R (Compatible with Look Delta).

SIDE B : EPS-M (Compatible with Shimano SPD).

E-PS11SA

DUAL INTERFACE INDOOR PEDALS

Strong, durable indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Antiloosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device

Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Antiloosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	89 x 94 mm



PATENTED



1034 g/pr



EMM208-BP

SIDE A : Platform + Toe clip attachable.

SIDE B : EPS-M (Compatible with Shimano SPD).

E-PS816SA-C8

INDOOR PEDALS

A strong, durable and versatile indoor pedal. Featuring a supersize axle and quad LSL bearings, an extra robust mechanism and an anti-loosen axle device. Interface allows use with: 1. EPS-M (Compatible Shimano MTB system). 2. Platform pedals. 3. Toe clips and straps.

- Supersize axle
- Supersize quad bearings
- Anti-loosen axle device

Interface	EPS-M (Compatible with Shimano SPD).
Body	Aluminum, ED black.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Size	98 x 115 mm (w/ toe clip 98 x 165 mm)



EPSX BIKE

ISX_b SERIES


OUTDOOR CYCLING DRIVE SYSTEM

The Exustar ISXb Drive system consists of pedals and a crankset connected by the innovative ISXb Interface.

The ISXb Interface is a 10 tooth splined system that connects the pedal axle to the crank arm (crankset is compatible with ISIS Drive bottom brackets).

ISXb guarantees a stronger, more reliable pedal-to-crank interface that will stand up to rigorous use by even the heaviest and most aggressive riders on the road, trail or in the fitness center environment.

This system is designed for optimal strength and durability. Flexibility of use is also factored into the ISXb system: Optionally, Exustar pedals can be fitted with longer more beefy axles that suit users with larger, heavier physiques, and/or extra large shoe sizes.

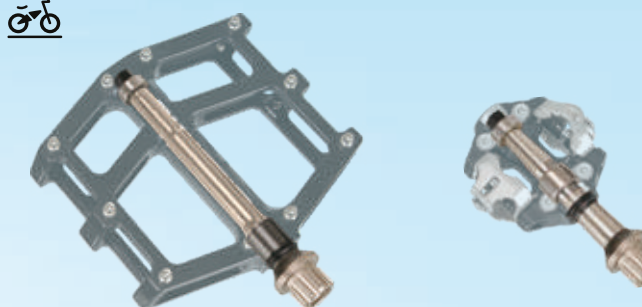

BENEFITS OF THE ISXb DRIVE

- Stronger interface
- More stable and durable
- Can be used with large diameter axles
- Can be used with longer axles



ISXb Splined Interface
(Patented)



ISXb Splined Interface
(Patented)



CRANKSET

Notes

Sold as a set, including ISXb pedals and crankset. Optionally, Exustar can also supply ISIS Drive bottom brackets.
The ISXb Drive is compatible only with ISIS Drive bottom brackets.

PATENTED



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).

551 g/pr

Compatible



Option



ISXb Axle
Oversize axle with ISXb drive system.



EMM208-BP

► E-PS7 ISXb



DUAL INTERFACE OUTDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- ISXb axle
- Extra-strength oversize bearings
- Corrosion resistant

Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable .
Cleats	E-ARC1 & E-C05F
Size	87 x 94 mm

PATENTED




SIDE A: Platform + Toe clip attachable.



SIDE B: EPS-M (Compatible with Shimano SPD).

Compatible

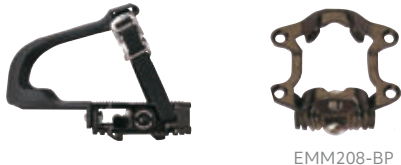

EMM208-BP



ISXb Axle
Over size axle with ISXb drive system.

► E-PS817-C8 ISXb



OUTDOOR PEDALS

A strong, durable indoor pedal. Featuring an oversize axle and sealed & needle bearings. Interface allows use with: 1. EPS-M (Compatible with Shimano SPD). 2. Platform pedals. 3. Toe clips and straps.


- ISXb axle
- Extra-strength oversize bearings

Interface	EPS-M (Compatible with Shimano SPD). Platform pedals. Toe clips and straps.
Body	Aluminum. ED Black.
Axle	Oversize heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Other	Also compatible with conventional bicycles (outside use).
Size	97.5 x 85 mm

EPSX ISX^S SERIES

SPIN INDOOR CYCLING DRIVE SYSTEM

SUPERSIZE QUAD LSL BUSHING BEARINGS

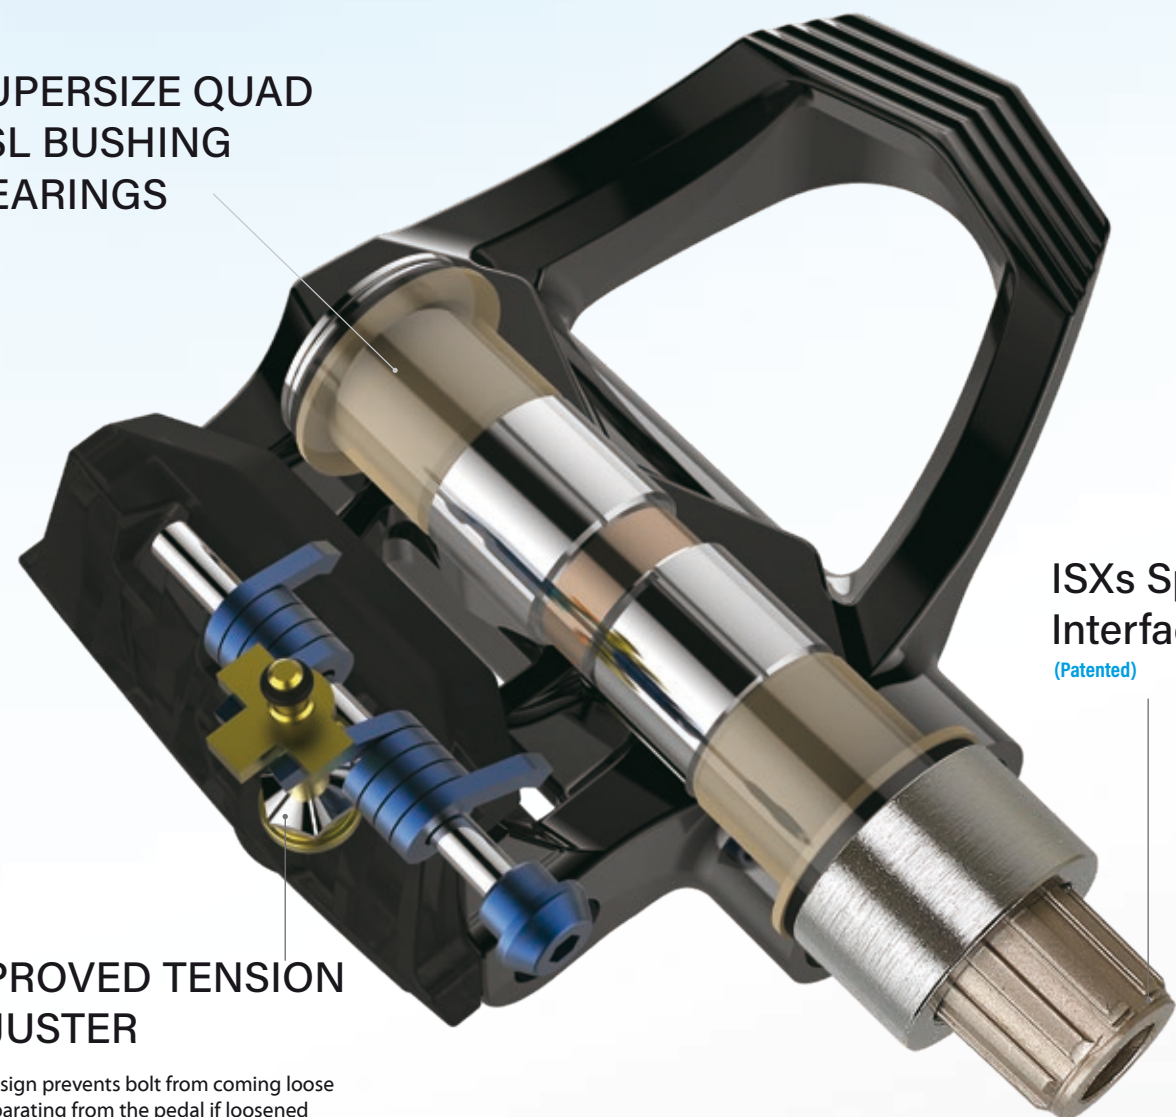


ISXs Splined Interface
(Patented)

IMPROVED TENSION ADJUSTER


New design prevents bolt from coming loose and separating from the pedal if loosened too much.

- Supersize
- EPSX drive system
- Extra-strong and durable
- Heat-treated
- CNC-machined Cr-Mo
- Supersize quad lsl bushing bearings

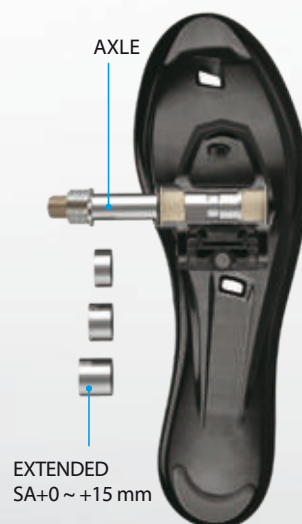

Axle Width Options

Tightening the locking ring prevents axle from ever accidentally coming loose.

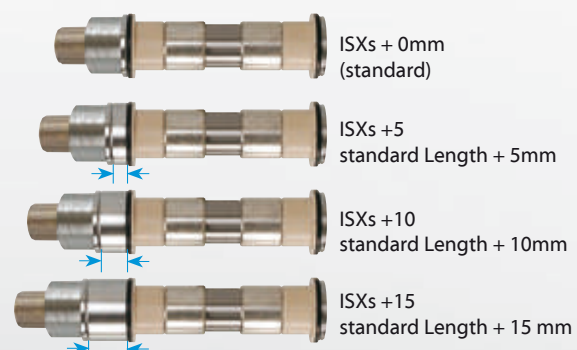

PATENTED



EPS-R (Compatible with Look Delta).

► E-PS9 ISXs

INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device

Interface EPS-R (Compatible with Look Delta).

Body Aluminum, nickel plated & ED black, corrosion resistant.

Axle Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.

Bearings Quad LSL bearings.


Bindings EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.

Cleats E-ARC1

Size 88 x 94 mm



PATENTED

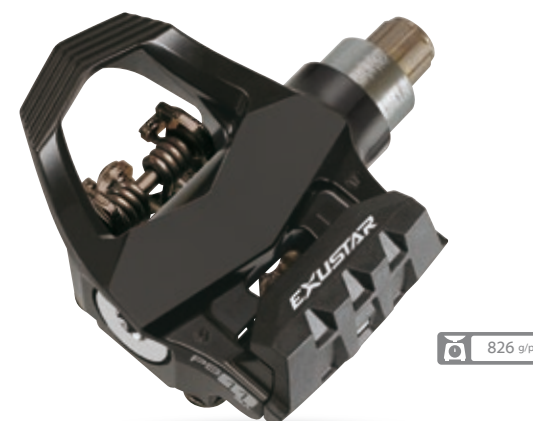

SIDE A : EPS-R (Compatible with Look Delta).

► E-PS11 ISXs

DUAL INTERFACE INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device

Interface EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).

Body Aluminum, nickel plated & ED black, corrosion resistant.

Axle Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.

Bearings Quad LSL bearings.

Binding EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.

EPS-M: Corrosion resistant Cr-Mo, tension adjustable.

Cleats E-ARC1 & E-C05F

Size 89 x 94 mm



SIDE B : EPS-M (Compatible with Shimano SPD).

ROWING


Pedals



ROWING PEDAL TECHNOLOGY


Dual Binding Clip-in Pedal System

CONVENTIONAL FOOT STRETCHERS

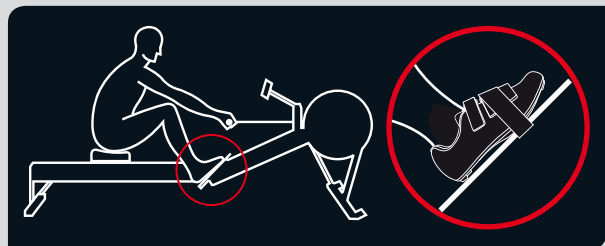

Rigid positioning.

EXUSTAR ROWING PEDALS

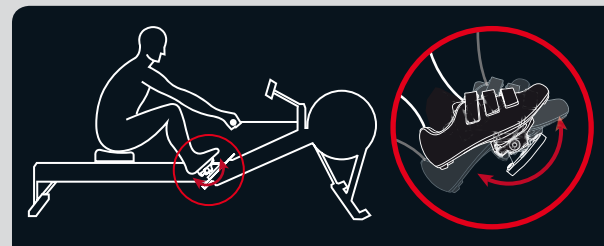

Concentrated power transfer.
Freedom of movement.

Exustar's clip-in rowing pedals offer benefits that top racing cyclists have been enjoying for decades.


The efficient, concentrated power transfer of rowing pedals allow rowers to focus on improving performance and not foot position. Unlike conventional foot stretchers, rowing pedals allow freedom of movement, and the natural rotation of the ankle, helping avoid discomfort, strains and injury. Positioning on base plate is adjustable to suit a wide variety of rowing machines. Lateral spacing is adjustable to suit a range of user body and feet sizes. Rowing pedals can be fitted to a base plate with axles mounted on the inside of pedal bodies, or on the outside. And additional feature is that Exustar rowing pedals can also be used on indoor bikes.

Exustar dual binding pedals are used with clip-in bicycle shoes and Exustar EPS cleats or EPS-M cleats.

Multi-interface EPS-R (Compatible with Look **Delta**)+EPS-M (Compatible with Shimano **SPD**).



USA
China
Taiwan

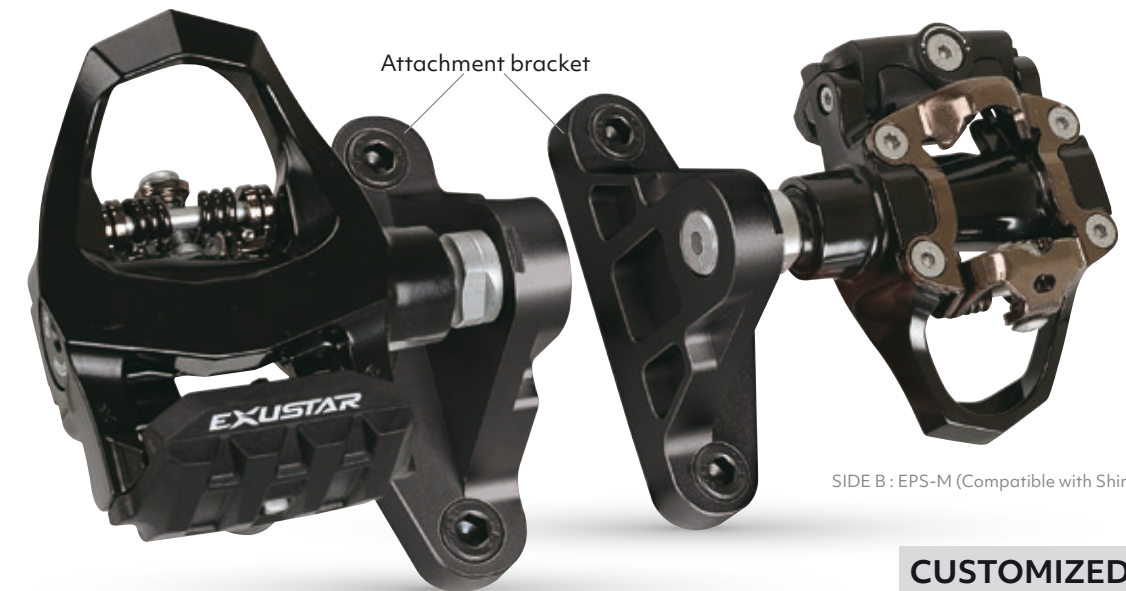


SIDE A : EPS-R (Compatible with Look Delta).

SIDE B : EPS-M (Compatible with Shimano SPD).

CUSTOMIZED



Adjustable Positioning

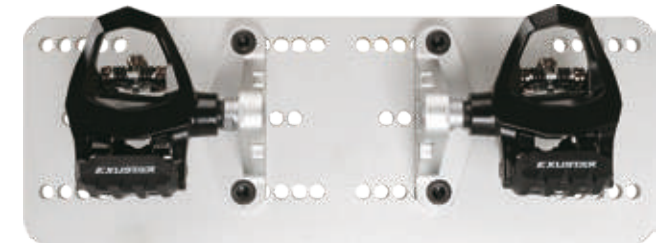

Base plate not included.



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

► ROWING PEDALS

DUAL BINDING CLIP-IN PEDAL SYSTEM

Exustar clip-in rowing pedals offer benefits that top racing cyclists have been enjoying for decades.

- Efficient, concentrated power transfer
- Maximum natural ankle rotation
- Lateral freedom of movement
- Quick clip in and release

Pedal-Shoe Interface

Side A: EPS-R cleats (Compatible with Look Delta)

Side B: EPS-M cleats (Compatible with Shimano SPD)


Compatible clip-in bicycle shoes and cleats required.

EPS-R cleats or EPS-M cleats available separately from Exustar.



CLEATS


CLEAT TECHNOLOGY



USA : US8.453.353 B2/ 10625816
Japan : 3218904
Germany : 202018106478
China : ZL201810962794.8
Taiwan : I686148



Euro-PCT: EP19164985.4

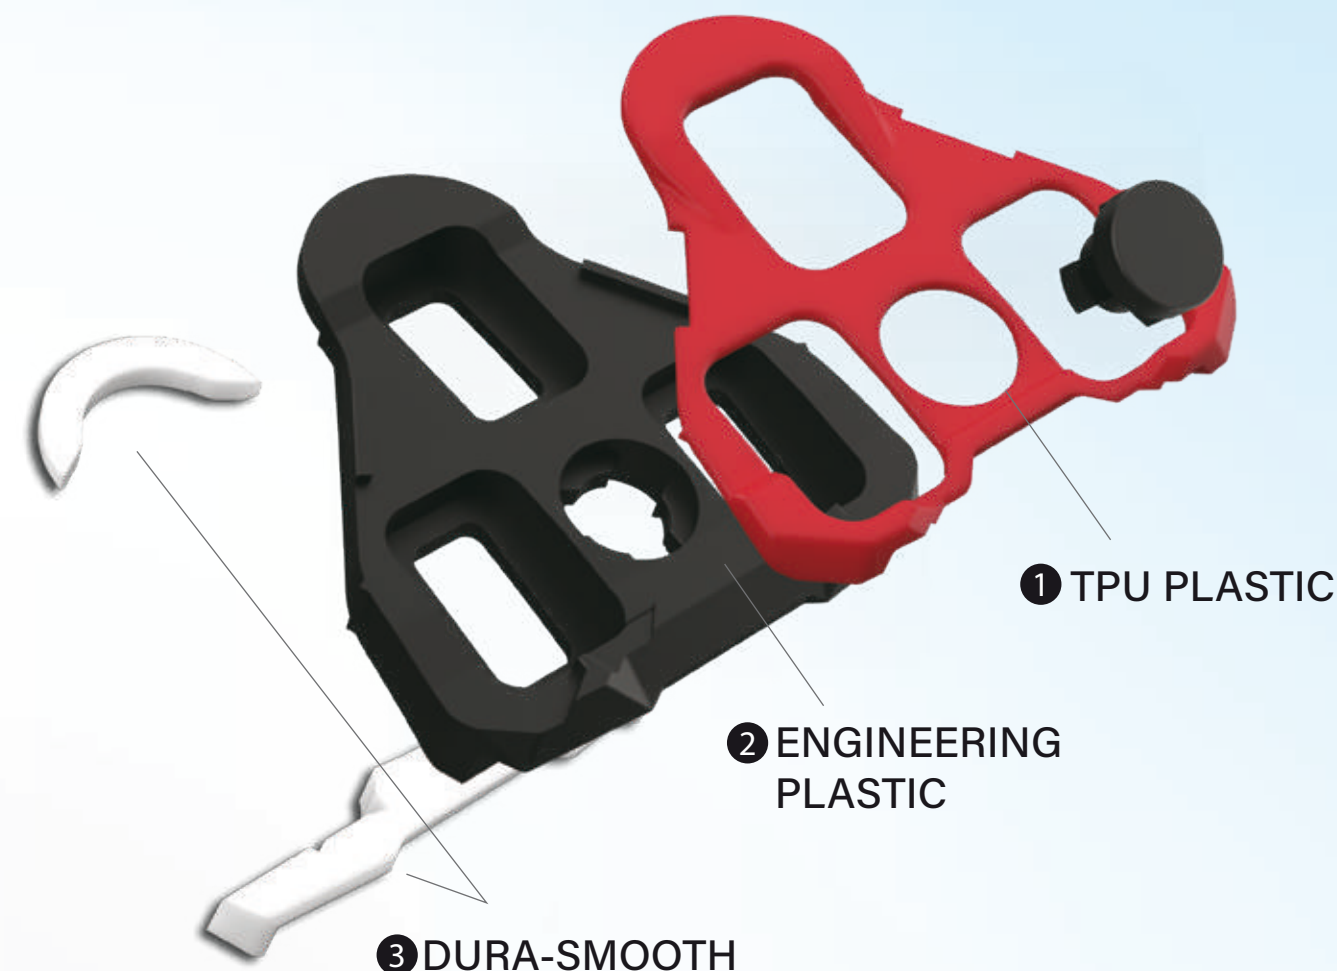

TRIPLE LAYER CLEATS

Exustar's top-line road cleats, consisting of an Engineering Plastic layer, a TPU Plastic layer and a Dura-Smooth Layer.

WIDE-BEAM DESIGN

Some Exustar EPS-R road cleats feature a Wide-Beam design that provides greater contact area between pedal and shoes. This increases stability and power. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

DURA-SMOOTH

Dura-Smooth (durable + smooth) refers to the third partial layer on our Triple Layer Cleats, the part of the cleat that connects with the pedal. The Dura-Smooth layer is made from reinforced polyoxymethylene, a material that is hard, ensuring long life, and smooth, facilitating easy pedal entry and exit.

ANTI-SLIP WALK LAYER

Some Exustar road cleats are equipped with an integrated TPU plastic anti-slip layer. This provides grip when walking on the road or footpath.



SIDE A

SIDE B

► E-ARCR3H3



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 50 g/pr

► E-ARCR3H2



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic.

Weight 48 g/pr

► E-ARCR3H1



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability.


- Wide-Beam

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Floating (6°).


Material Engineering thermoplastic.

Weight 51 g/pr

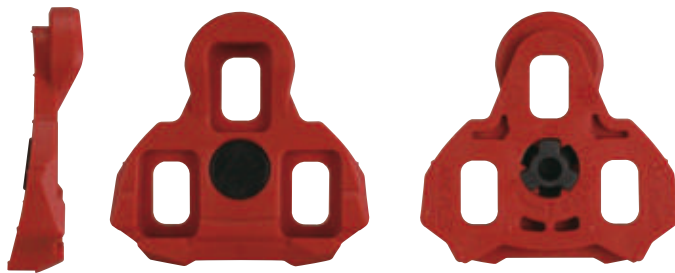

SIDE A

SIDE B

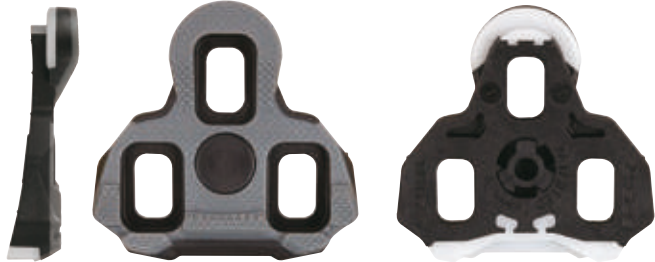

SIDE A

SIDE B

► E-BLKR3H3



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 50 g/pr

► E-BLKR3H2



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 48 g/pr



SIDE A

SIDE B

► E-BLKR3H1



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability.

- Wide-Beam

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Fixed position.

Material Engineering thermoplastic.

Weight 51 g/pr



SIDE A

SIDE B



SIDE A

SIDE B

E-RSL3H3



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 57 g/pr

E-RSL3H2



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic.

Weight 54 g/pr

E-RSL3H1



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Floating (6°).


Material Engineering thermoplastic.

Weight 55g/pr



SIDE A

SIDE B

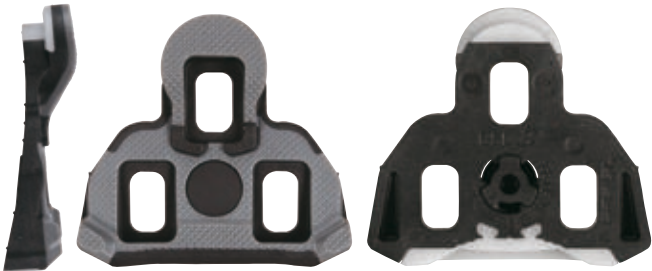

SIDE A

SIDE B

E-BSL3H3



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 57 g/pr

E-BSL3H2



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).


- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 54 g/pr

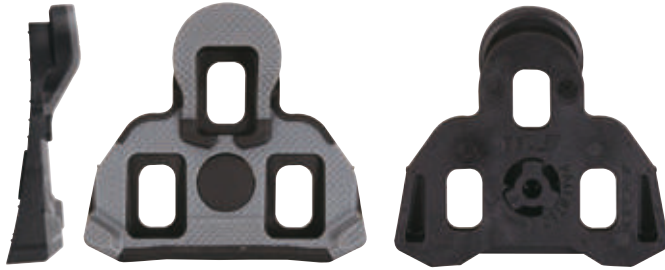

SIDE A

SIDE B

E-BSL3H1



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic.

Weight 55 g/pr



SIDE A

SIDE B



SIDE A

SIDE B

E-ARC1H3



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes

Mode Floating (9°).

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 61 g/pr

E-ARC1H2



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Floating (9°).

Material Engineering thermoplastic / TPU plastic.

Weight 62 g/pr

E-ARC1H1



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).


- Wide-Beam

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Floating (9°).

Material Engineering thermoplastic.

Weight 63 g/pr

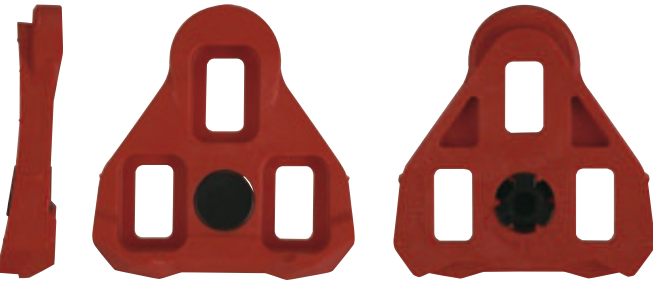

SIDE A

SIDE B



SIDE A

SIDE B

E-BLK1H3



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 61 g/pr

E-BLK1H2



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.


- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 62 g/pr

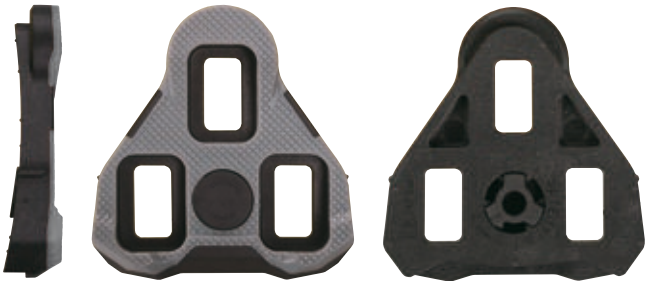

SIDE A

SIDE B

E-BLK1H1



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

- Wide-Beam

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic.

Weight 63 g/pr



SIDE A

SIDE B



E-ARCR2: Floating (6°)



E-BLKR2: Fixed position

► E-ARCR2 / E-BLKR2



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARCR2: Floating (6°), E-BLKR2: Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 48 g/pr



E-ARC11+: Floating (6°)



E-BLK11+: Fixed position

► E-ARC11+ / E-BLK11+



ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes.

Mode E-ARC11: Floating (6°), E-BLK11: Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 46 g/pr



E-ARC10: Floating (6°)



E-BLK10: Fixed position

► E-ARC10 / E-BLK10



ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes.

Mode E-ARC10: Floating (6°), E-BLK10: Fixed position.

Material Engineering thermoplastic.

Weight 48 g/pr



E-ARC5+: Floating (9°)



E-BLK5+: Fixed position

► E-ARC5+ / E-BLK5+



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC5+: Floating (9°), E-BLK5+: Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 52 g/pr



E-ARC1: Floating (9°)



E-BLK1: Fixed position

► E-ARC1 / E-BLK1



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC1: Floating (9°), E-BLK1: Fixed position..

Material Engineering thermoplastic.

Weight 46 g/pr

EPS-R CLEATS (Compatible with Exustar EPS-R & Look **Keo** pedals. / 3 bolt hole shoes.)



E-ARCR2CK: Floating (6°)



E-BLKR2CK: Fixed position

► E-ARCR2CK / E-BLKR2CK

ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Carbon fiber composite cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Carbon fiber composite
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARCR2CK: Floating (6°), E-BLKR2CK: Fixed position.

Material Carbon fiber-nylon composite / TPU plastic.

Weight 48 g/pr



E-ARCR20CK: Floating (6°)



E-BLKR20CK: Fixed position

► E-ARCR20CK / E-BLKR20CK

ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Carbon fiber composite cleats feature Wide-Beam design for greater power and stability.

- Carbon fiber composite
- Wide-Beam.

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARCR20CK: Floating (6°), E-BLKR20CK: Fixed position.

Material Carbon fiber-nylon composite.

Weight 48 g/pr



E-ARC11CK: Floating (6°)



E-BLK11CK: Fixed position

► E-ARC11CK / E-BLK11CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

Carbon fiber composite cleats. Anti-slip layer for walking.

- Carbon fiber composite
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARC11CK: Floating (6°), E-BLK11CK: Fixed position.

Material Carbon fiber-nylon composite / TPU plastic.

Weight 45 g/pr

EPS-R CLEATS (Compatible with Exustar EPS-R & Look **Keo** pedals. / 3 bolt hole shoes.)



E-ARC10CK: Floating (6°)



E-BLK10CK: Fixed position

► E-ARC10CK / E-BLK10CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

Carbon fiber composite cleats.

- Carbon fiber composite

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARC10CK: Floating (6°), E-BLK10CK: Fixed position.


Material Carbon fiber-nylon composite.

Weight 45 g/pr

EPS-R CLEATS (Compatible with Exustar EPS-R & Look **Delta** ppedals. / 3 bolt hole shoes.)



E-ARC5: Floating (9°)



E-BLK5: Fixed position

► E-ARC5CK / E-BLK5CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta)

Carbon fiber composite cleats. Anti-slip layer for walking.

- Carbon fiber composite
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC5: Floating (9°), E-BLK5: Fixed position.

Material Carbon fiber-nylon composite / TPU plastic.

Weight 53 g/pr



E-ARC1CK: Floating (9°)



E-BLK1CK: Fixed position

► E-ARC1CK / E-BLK1CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

- Carbon fiber composite

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC1CK: Floating (9°), E-BLK1CK: Fixed position.

Material Carbon fiber-nylon composite.

Weight 49 g/pr

EPS-M CLEATS (Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.)



E-C01F



MTB CLEATS
EPS-M (Compatible with Shimano SPD).
• Forged for strength and durability

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	40 g/pr



E-C03F



MTB CLEATS
EPS-M (Compatible with Shimano SPD).
• Entry level (easier disengagement)
• Forged for strength and durability

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	40 g/pr



E-C05F



MTB CLEATS
EPS-M (Compatible with Shimano SPD).
• Forged for strength and durability.

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	42 g/pr



E-C07F



MTB CLEATS
EPS-M (Compatible with Shimano SPD).
• Forged for strength and durability

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	43 g/pr

EPS-T CLEATS (Compatible with Exustar track pedals and other brands of track pedals. / Track shoes.)



Fixed position

E-C100



TRACK BIKE CLEATS
• Anti-slip walk layer

Interface	For track riding.
Mode	Fixed position slot.
Material	Engineering thermoplastic.
Weight	34 g/pr



Fixed position

E-C101



TRACK BIKE CLEATS
• Anti-slip walk layer

Interface	For track riding.
Mode	Fixed position slot.
Material	Engineering thermoplastic.
Weight	40 g/pr



E-CK5-BK



ROAD CLEAT COVERS
EPS-R Wide-Beam (Compatible with Look Keo cleats).
Lightweight, durable, flexible.

Compatibility	EPS-R Wide-Beam cleats: E-ARCR2, E-BLKR2, E-ARCR3, E-BLKR3.
Weight	90 g/pr



E-CK3B



ROAD CLEAT COVERS
EPS-R (Compatible with Look Keo cleats).
• Lightweight, durable, flexible.

Compatibility	EPS-R cleats: E-ARC10, E-BLK10, E-ARC11+, E-BLK11+.
Weight	96 g/pr



E-CK1B



ROAD CLEAT COVERS
EPS-R (Compatible with Look Delta cleats).
• Lightweight, durable, flexible.

Compatibility	EPS-R cleats: E-ARC1, E-BLK1.
Weight	74 g/pr



E-CK6B



ROAD CLEAT COVERS
EPS-SL (Compatible with Shimano SPD-SL cleats).
• Lightweight, durable, flexible.

Compatibility	EPS-SL cleats: E-RSL3, E-BSL3, E-RSL1, E-BSL1, E-RSL11, E-BSL11.
Weight	86 g/pr



E-CK2B



MTB CLEAT COVERS
EPS-M (Compatible with Shimano SPD).
• Lightweight, durable, flexible.

Compatibility	EPS-M cleats: E-C01F, E-C03F, E-C05F
Weight	13 g/pr



CLIP-IN PEDAL ADAPTERS

Clip-in pedal adapters allow a user of clip-in pedals to conveniently and safely use them wearing ordinary sports shoes. The pedal adapter set consists of four (4) parts: a pedal-like platform, a toe clip, a toe strap, and a cleat (3 bolt hole or 2 bolt hole). A rider uses the adapter much like an ordinary platform pedal. The adapter can be used with or without a toe clip and strap.

NOTE: The pedal adapter unit is not a pedal nor a replacement for one. It does not have an axle.



E-SL02-K-A

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-ARCR3H1 Cleat + Toe Clip.

Pedal Interface	EPS-R (Compatible with Look Keo pedals).
Cleats	E-ARCR3H1
Weight	368 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02-ESL-A

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-RSL3H1 Cleat + Toe Clip.

Pedal Interface	EPS-SL (Compatible with Shimano SPD-SL pedals).
Cleats	E-RSL3H1
Weight	372 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02A

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-ARC1 Cleat + Toe Clip.

Pedal Interface	EPS-R (Compatible with Look Delta pedals).
Cleats	E-ARC1
Weight	379 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02B

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-BLK1 Cleat + Toe Clip.

Pedal Interface	EPS-R (Compatible with Look Delta pedals).
Cleats	E-BLK1
Weight	379 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02D

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-C01F Cleat + Toe Clip.

Pedal Interface	EPS-M (Compatible with Shimano SPD pedals).
Cleats	E-C01F
Weight	363 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02-B6

E-SL02 Platform + toe clip.

Engineering thermoplastic platform toe clip and toe strap can be attached to platform.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL09
CLIP-IN PEDAL ADAPTERS

- Platform
- Aluminum platform
 - Toe clip and toe strap can be attached to platform
- Compatibility E-PS7, E-PS8, E-PS12, E-PS207.



E-SL09A
CLIP-IN PEDAL ADAPTERS

- Platform + Toe Clip + Toe Strap.
- Aluminum platform, plastic toe clip, nylon strap.
- Compatibility E-PS7, E-PS8, E-PS12, E-PS207



E-SL06
ADAPTER PLATFORM-CLEAT

Pedal Interface EPS-R (Compatible with Look Keo pedals).

Material Engineering thermoplastic platform.



E-SL07
ADAPTER PLATFORM-CLEAT

Pedal Interface EPS-R (Compatible with Look Delta pedals).


Material Engineering thermoplastic platform.



E-SL08
ADAPTER PLATFORM-CLEAT

Pedal Interface EPS-SL (Compatible with Shimano SPD-SL pedals).

Material Engineering thermoplastic platform.

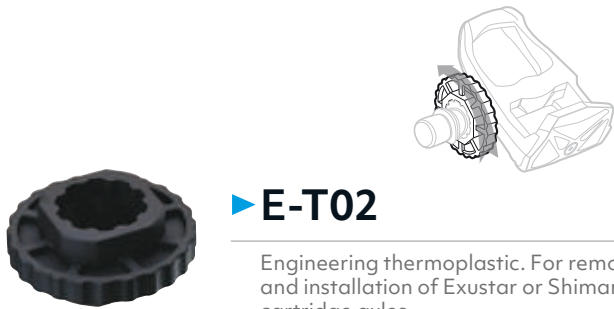

E-T02

Engineering thermoplastic. For removal and installation of Exustar or Shimano cartridge axles.

Use with wrench.

Weight 10g



E-T09
PEDAL CARTRIDGE AXLE REMOVAL TOOLS

Pedal cartridge axle removal tool for removal and installation of Exustar or Shimano cartridge axles.

Made by H/t with plastic handle grip

Weight 74g



GREASE

For high-end components. Fortified with micron-sized PTFE particles to ensure ultra-low friction. TG01+ attaches with convenient nozzle Compatible with Exustar grease gun E-T05+

Weight 150g




BICYCLE GREASE GUN

Engineering thermoplastic.

Easy one-handed operation. Compatible with Exustar grease gun E-G01+/TG01+/G02+/TG02+, also many third party's grease tubes.

Weight 70g

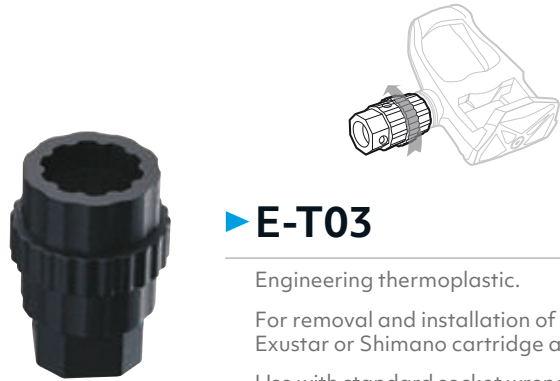

E-T03

Engineering thermoplastic.

For removal and installation of Exustar or Shimano cartridge axles.

Use with standard socket wrench.

Weight 18g



E-T19
PEDAL CARTRIDGE AXLE REMOVAL TOOLS

Pedal cartridge axle removal tool for removal and installation of Exustar cartridge axles.

Weight 195g



GREASE

High quality paraffin-based lithium grease. TG02+ attaches with convenient nozzle Compatible with Exustar grease gun E-T05+

Weight 150g



GREASE GUN


The Exustar grease gun works with Exustar grease and many third party grease tubes.

Exustar grease is formulated to exceed the toughest demands of on and off- road cycling. it features agents that help expel water, oxidation inhibitors that protect against rust, anti-wear additives that cling to contact surfaces, and high temperature stability that prevents premature grease breakdown.

Weight 150g/tube

Ergonomic Axle Upgrade for Road Pedals

The variable length of this specially designed, patented axle allows riders of different height and shoe size to customize axle length for improved pedaling ergonomics. The threaded axle head is extended allowing the horizontal center of the axle to be moved closer to the crank arms. The axle comes with two spacers (2.5 mm, 5 mm) that allow three axle length settings: standard, medium, and short.

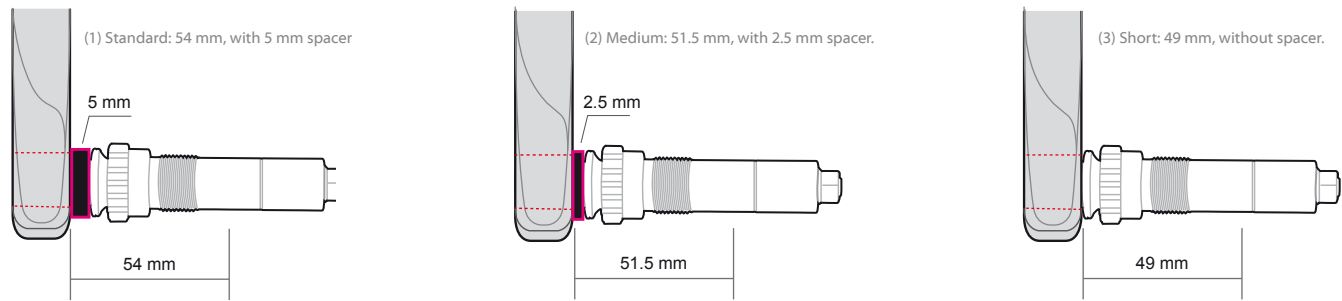

Retrofit, aftermarket upgrade compatible with these Exustar road pedals:
E-PR201, E-PR101SL, E-PR100CKTi, E-PR100CKKti, E-PR100CK, E-PR100AL-WH, E-PR100P, E-PR70CKTi, E-PR70Ti-WH, E-PR70



E-PA4AD

AXLE
Axle CNC-machined Cr-Mo (cartridge).
Bearings Sealed & needle.
Size 87 x 94 mm
Weight 83 g/pc
Axle Length Settings (measured from crank arm to horizontal center of axle).



E-ESS088-8

GRIP PINS
Long 8 mm (2 mm Allen key included)



E-ESS088-4

GRIP PINS
Short 4 mm (2 mm Allen key included)



E-EMM191

DUST CAPS
Polished, anodized aluminum dust caps (14mm dia.) for using with a wide range of Exustar pedals.



EMP201

TOE CLIPS
Large supportive design with instep guard and built-in reflector.
Material Nylon



E-RR1

REFLECTORS



E-RR3

REFLECTOR PLATFORMS
EPS-R (Compatible with Look Keo).



EMM208-BP

BINDING



EMP385

TOE CLIPS
Large supportive design with instep guard.
Material Nylon



E-RR2

REFLECTOR PLATFORMS
EPS-M (Compatible with Shimano SPD).



EMP392

TOE STRAPS
Webbing strap. Durable nylon webbing. Stainless steel buckles.
450mm (17.71")



EMM350-BP-AY

BINDING



EMM350-MTT-AY

BINDING



- 166 ROAD SHOES
- 182 TRIATHLON SHOES
- 184 MTB SHOES
- 198 BMX SHOES
- 200 SANDALS
- 204 INDOOR SHOES


INDEX

SHOES

SHOE TECHNOLOGY

Guide to shoe soles

ICON GUIDE

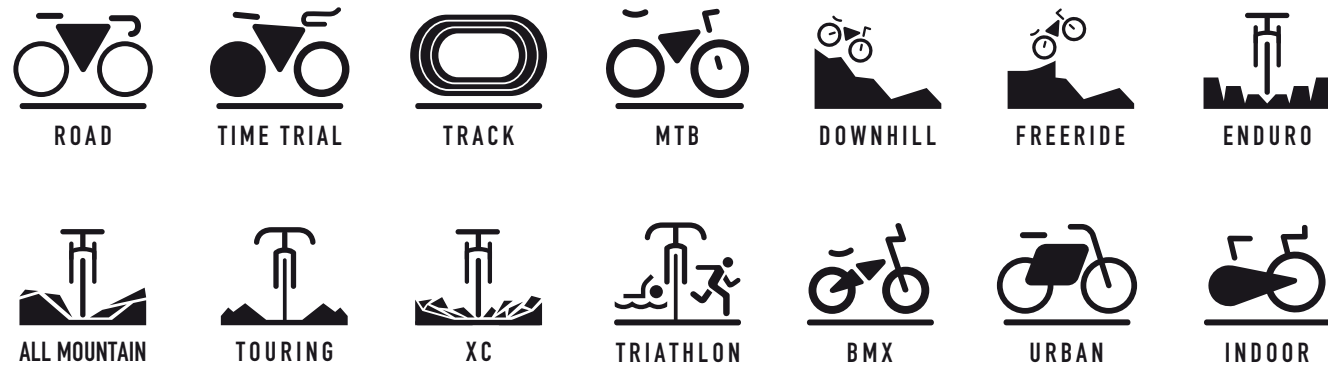

Stiffness **10**

SLIMLINE CARBON FIBER SOLE

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

Stiffness **8**

CARBON FIBER-NYLON COMPOSITE SOLE

A rigid combination of carbon fiber and nylon.

Stiffness **7**

NYLON-FIBERGLASS COMPOSITE SOLE

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Stiffness **5**

RUBBER SOLE

Sole made from natural rubber.

SHOE FEATURES



ROTARY MICROLOCK CLOSURE

The Rotary Microlock Closure system provides the greatest degree of fit, comfort, and precision adjustment in a bicycle shoe. It is a system, unlike traditional tie-up laces, that allows lace pressure to be equalised around your foot. Foot fit and foot comfort is literally dialled in—fine tuned—by a small mechanical reel that controls a network of laces. On the fly micro adjustment is quick and easy, ensuring perfect fit and comfort for the duration of your ride.



MICROLOCK M2 CLOSURE

The Microlock M2 is Exustar's 2nd generation cam and ratchet strap closure system. Besides being lighter and more compact, the M2 has several key advantages over our standard Microlock system:

Buckle is position-adjustable—there is a choice of two bolt hole positions so riders can individualise the basic setup.

1 Ratchet strap is easily replaceable.



2 Extra strong, forged tightening lever is shaped for easy access while riding.




3 Highly responsive release button is perfect in high pressure competition situations.




AIR CONTROL

Strategically placed vents in road shoe soles promote air circulation, which keeps feet cooler and drier.



CLEAT POSITION INDICATOR

Lines and numbers are marked on the shoe sole. Having ascertained your optimum cleat position on one shoe, by using the indicator as a guide, you can easily reproduce that position on the second shoe. Also handy when you replace old cleats with new—just duplicate the original position.

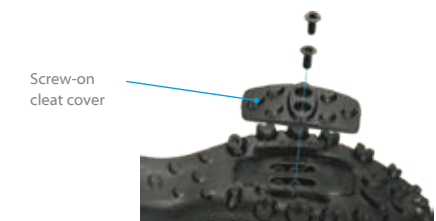

SCREW-ON CLEAT RECESS COVER

Screw-on, reusable cleat recess cover gives a rider the option to use MTB shoes with or without cleats.
































REPLACEABLE WALK PAD

A replaceable screw-on TPU anti-slip walk pad. Being able to replace the walk pad helps prolong the life of your shoes.



CARBON FIBER

An extremely rigid, lightweight carbon fiber sole maximizes power transfer.

ROAD	ADVANCED			EXPERT	COMP		SPORT		
	 E-SR21011-BK	 E-SR21111-WH	 E-SR21111B	 E-SR446	 E-SR496	 E-SR4173	 E-SR4106	 E-SR466-BK	 E-SR486
							 E-SR4152	 E-SR456B	 E-SR456
MTB	 E-SM3011			 E-SM3410-GY	 E-SM3510		 E-SM374	 E-SM3310B-RD	 E-SM3310-RD
							 E-SM827	 E-SM817	 E-SM825
TRIATHLON	 E-ST2411R-WH								
BMX							 E-SB7011		
SANDALS							 E-SS515D	 E-SS503	
INDOOR	 E-SR4153-WH/BK						 E-SP838	 E-SP818	 E-SP828

ROAD


SHOES




CARBON SOLE FEATURES

ROAD

- Thin, lightweight sole.
- Extra-strong arch.
- Large vents for maximum cooling.
- Anti-slip rubber walk pads reduce wear.
- Rigid I-beam structure eliminates torsion in the sole.
- Cleat attachment slotted holes allow a greater adjustment range.

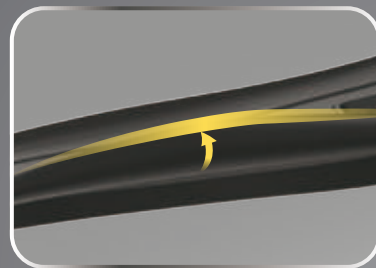


Extra-strong arch

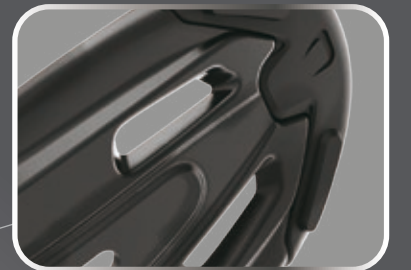


Large vents for maximum cooling




Anti-slip rubber walk pads
reduce wear

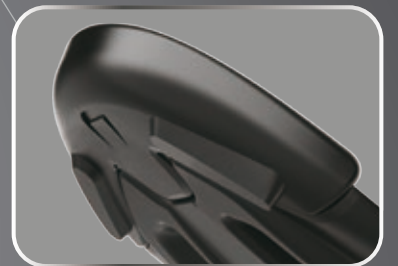

Anti-slip rubber walk pads
reduce wear

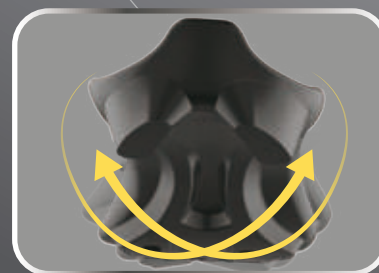

Rigid I-beam structure eliminates
torsion in the sole

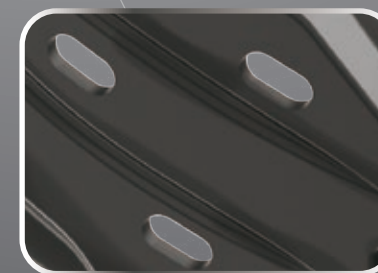

Cleat attachment slotted holes
allow a greater adjustment range



CARBON SOLE FEATURES

ROAD



Color Option



E-SR21011

Carbon Fiber Sole

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

Stiffness 10

Rotary microlock closure



► E-SR21011-BK



CARBON FIBER ROAD SHOES

Advanced level road race shoe. Engineered for maximum performance. It features a Smooth Form hot melt TPU upper with breathable mesh and dual rotary microlock closures. An extremely rigid, carbon fiber sole maximizes power transfer, while built-in Air Control vents help keep you cool, and rubber anti-slip walk pads are ready when your feet touch the ground.

- Smooth Form upper
- Dual rotary microlock closures
- Slimline carbon fiber sole
- Rubber walk pads

- Upper** Hot melt TPU with breathable mesh, lightweight PEBAX heel counter.
- Closure** Dual rotary microlock closures.
- Sole** Carbon fiber with rubber walk pad. Air Control vents, cleat position indicator.
- Insole** Ergonomic arch-design washable PU.
- Interface** 3 bolt hole cleats.
- Size** 37 - 48



282 g/pc (#42)

Color Option



E-SR21111



E-SR21111B-WH

Carbon Fiber Sole

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

Stiffness 10

Breathable mesh



► E-SR21111-WH



CARBON FIBER ROAD SHOES

Advanced level road race shoe engineered for maximum performance. It features a Smooth Form upper with breathable mesh, and Rotary microlock closure. An extremely rigid, carbon fiber sole maximizes power transfer, while built-in Air Control vents help keep you cool, and rubber anti-slip walk pads are ready when your feet touch the ground.

- Smooth Form upper
- Rotary microlock closure
- Slimline carbon fiber sole
- Rubber walk pads
- Soft heel design for protecting Achilles tendon
- Cleat position indicator

Upper	Hot melt TPU with breathable mesh.
Closure	Rotary microlock clesuer, Velcro straps.
Sole	Carbon fiber with rubber walk pad. Air Control vents, cleat position indicator.
Insole	Ergonomic arch-design washable PU.
Interface	3 bolt hole cleats.
Size	37 - 48



300 g/pc (#42)

Color Option



E-SR496-BK



E-SR496-BL



E-SR496-RD

Nylon-fiberglass Composite Sole

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Stiffness 7

Rotary microlock closure



► E-SR496



ROAD SHOES

It features a contoured, comfortable PU leather upper, with breathable mesh, and Rotary microlock closure. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Rotary microlock closures
- Smooth Form upper
- Air Control
- Cleat position indicator

Upper	PU leather with TPU film, breathable mesh.
Closure	Rotary microlock closure, Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad, cleat position indicator.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



303 g/pc (#42)

Color Option



E-SR4173-RD

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR4173



ROAD SHOES

Comp level road shoe. It features a contoured, comfortable PU leather upper with breathable mesh and a Microlock buckle. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Microlock M2 buckle
- Air control

Upper	PU leather, breathable mesh.
Closure	Microlock M2 buckle, Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Washable EVA.
Interface	3 bolt hole cleats.
Size	35 - 50



268 g/pc (#42)

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR4106



ROAD SHOES

Sport level road shoe. It features a Smooth Form TPU upper with breathable mesh and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Cleat position indicator
- Air Control

Upper	Hot melt TPU, PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



300 g/pc (#42)

Color Option



E-SR466A

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR466-BK



ROAD SHOES

This shoe features a comfortable PU leather upper with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads for when your feet touch the ground.

- Cleat position indicator
- Air Control

Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad, cleat position indicator.
Insole	Ergonomic arch-design, washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



306 g/pc (#42)

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR486



ROAD SHOES

This shoe features a comfortable PU leather upper with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads for when your feet touch the ground.

- Cleat position indicator
- Air Control

Upper	PU leather, breathable mesh.
Closure	Velcro Straps.
Sole	Nylon-fiberglass composite, with Air Control vents,TPU walk pad.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



320 g/pc (#42)

Color Option



E-SR4152-BK

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR4152



ROAD SHOES

Sport level road shoe. This shoe features a comfortable PU leather upper with breathable mesh and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Air Control
- Breathable mesh

Upper	PU leather, breathable mesh.
Closure	Velcro straps
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Washable, perforated EVA.
Interface	3 bolt hole cleats. / 2 bolt hole cleats.
Size	37 - 50



286 g/pc (#42)

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Rotary microlock closure



E-SR446



ROAD SHOES

Expert level road shoe. Features a contoured, comfortable PU leather upper, with breathable mesh, and dual rotary microlock closures. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Dual rotary microlock closures
- Cleat position indicator
- Air Control

Upper	PU leather, breathable mesh.
Closure	Dual rotary microlock closures.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad, cleat position indicator.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



328 g/pc (#42)

Color Option



E-SR456B-PB

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR456B



ROAD SHOES

Sport level road shoe. Features a contoured, comfortable PU leather upper with breathable mesh, and a Microlock buckle. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Microlock M2 buckle
- Cleat position indicator
- Air Control

Upper	PU leather, breathable mesh.
Closure	Microlock M2 buckle, Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



309 g/pc (#42)

Color Option



E-SR456-PB

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR456



ROAD SHOES

Sport level road shoe. Features a contoured, comfortable PU leather upper with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Cleat position indicator
- Air Control

Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48

TRIATHLON

Shoes



266 g/pc (#42)

Carbon Fiber Sole

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

Stiffness 10

Rotary microlock closure



► E-ST2411R-WH



TRIATHLON SHOES

A high-end triathlon shoe engineered for maximum performance. It features a contoured, supple PU leather upper, with extra breathable mesh, large heel loops and a tongueless design for easy entry and quick change. The carbon sole has extra built-in Air Control vents to help keep you cool, and nonslip walk pads are ready when your feet touch the ground.

- Rotary microlock closures
- Extra ventilation
- Reinforced toe
- Rubber walk pads
- Carbon fiber sole
- Cleat position indicator

- Upper** PU leather with heel shell, breathable mesh, reflective swatch.
- Closure** Rotary microlock closures, Velcro straps.
- Sole** Carbon fiber with Air Control vents with rubber walk pad.
- Insole** Ergonomic arch-design washable PU.
- Interface** 3 bolt hole cleats.
- Size** 37 - 48

MTB

Shoes



CARBON SOLE FEATURES

MTB



Raised side protects foot and resists friction.

Anti-slip rubber tread-toe cap protects toe.

Anti-slip pedal pad.

Thin, lightweight sole.

Anti-slip rubber tread for comfortable walking.



Un-obstructive front tread facilitates smooth cleat engagement.



309 g/pc (#42)

Carbon Fiber Sole

Stiffness 10

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

Toe spikes attachable



Rotary microlock closure



► E-SM3011



CARBON FIBER MTB SHOES

A MTB shoe engineered for top performance. It features comfortable Microfiber leather upper with breathable mesh, and dual rotary microlock closures closure, plus pressure-relieving counter-directional straps. A slimline carbon fiber sole minimizes weight and thickness without sacrificing stiffness. Lightweight heel counter.

- Dual rotary microlock closures
- Slimline carbon fiber sole
- Lightweight heel counter
- Rubber tread
- Reinforced toe

Upper	Microfiber leather, breathable mesh.
Closure	Dual rotary microlock closures.
Sole	Carbon fiber, with rubber tread, anti-slip pedal pad.
Insole	Ergonomic arch-design washable PU.
Interface	2 bolt hole cleats.
Size	37 - 48



384 g/pc (#42)

Color Option



E-SM3410

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Toe spikes attachable



► **E-SM3410-GY**

MTB SHOES

Expert level MTB shoe. It features a contoured, comfortable PU leather upper with breathable mesh and dual rotary microlock closures. The nylon-fiberglass composite sole has a rubber tread for all-terrain conditions and an anti-slip pedal pad.

- Dual rotary microlock closures
- Mud-shedding rubber tread
- Reinforced toe

Upper	PU leather, breathable mesh.
Closure	Dual rotary microlock closures.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad, toe spikes attachable, cleat position indicator.
Insole	Ergonomic arch-design, washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



367 g/pc (#42)

Color Option



E-SM3510-BKWH



E-SM3510-BL



E-SM3510-GY



E-SM3510-GR

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Toe spikes attachable



► **E-SM3510**

MTB SHOES

It features a contoured, comfortable PU leather upper with breathable mesh and a rotary microlock closure. The nylon-fiberglass composite sole has anti-slip walk pads that are ready when your feet touch the ground.

- Smooth form upper
- Reinforced toe
- Rotary microlock closure
- Mud-shedding rubber tread
- Walk pads

Upper	PU leather with TPU, breathable mesh.
Closure	Rotary microlock closure, Velcro straps.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad, toe spikes attachable, cleat position indicator.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



370 g/pc (#42)

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SM374

MTB SHOES

This MTB shoe features a contoured, comfortable PU leather upper, with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has integrated TPU tread-perfect for all-terrain conditions.

- Upper PU leather, breathable mesh.
- Closure Velcro straps.
- Sole Nylon-fibreglass composite with TPU tread, anti-slip pedal pad, toe spikes attachable.
- Insole Washable, perforated EVA.
- Interface 2 bolt hole cleats.
- Size 35 - 48





379 g/pc (#42)

Color Options



E-SM3310B-PB

E-SM3310B-BL

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

► E-SM3310B-RD



MTB SHOES

This MTB shoe features a contoured, comfortable PU leather upper, with breathable mesh, and a Microlock buckle. Nylon-fiberglass composite with rubber tread, anti-slip pedal pad. For all-terrain conditions.

- Microlock M2 buckle

Upper	PU leather, breathable mesh.
Closure	Microlock M2 buckle, Velcro straps.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



352 g/pc (#42)

Color Options



E-SM3310-PB

E-SM3310-BL

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

► E-SM3310-RD



MTB SHOES

This MTB shoe features a contoured, comfortable PU leather upper, with breathable mesh, and Velcro straps. Nylon-fiberglass composite with rubber tread, anti-slip pedal pad. For all-terrain conditions.

Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48


NEW GENERATION SEMI-FLEXIBLE MTB SOLE



Wider design.



Semi-flexible mid-sole makes for a more walkable shoe.



Lightweight EVA wedge.



Mud-shredding, water-dispersing, anti-slip tread.



Chamfered cleat recess allows easier cleat engagement.



Durable rear pad.



355 g/pc (#42)

Color Option



E-SM827-BK

Rubber Sole

Sole made from natural rubber.

Stiffness 5

► E-SM827



MTB SHOES

Sport level MTB shoe. This all-round MTB shoe features contoured, hot melt PU sheet with breathable mesh and a semi-flexible rubber sole. Compatible with clip-in or platform pedals.

- Smooth form upper
- Semi-flexible sole
- Cleat position indicator

Upper	Hot melt TPU, breathable mesh.
Closure	Velcro straps.
Sole	Rubber with EVA wedge.
Midsole	Nylon.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



341 g/pc (#42)

Rubber Sole
Sole made from natural rubber.

Stiffness **5**



► **E-SM817**



MTB SHOES

This all-round MTB shoe features a contoured, hot melt PU sheet with breathable mesh, and a rubber sole. Compatible with clip-in or platform pedals. New generation semi-flexible sole.

- Elastic lace holder
- Cleat position indicator

Upper Hot melt TPU with breathable mesh.
Closure Laces.
Sole Rubber with EVA wedge.
Midsole Nylon
Insole Ergonomic arch-design washable EVA.
Interface 2 bolt hole cleats.
Size 37 - 48



399 g/pc (#42)

Color Option



E-SM825-BL

Rubber Sole
Sole made from natural rubber.

Stiffness **5**

► **E-SM825**



RIDE-WALK SHOES

Shoe designed for both cycling and walking. Features toe & ankle abrasion guards. Compatible with clip-in or platform pedals.

- Screw-on cleat recess cover
- Elastic lace holder

Upper Hot melt PU sheet with breathable mesh.
Closure Laces.
Sole Rubber with EVA wedge. Screw-on cleat recess cover.
Midsole Nylon.
Insole Washable EVA.
Interface 2 bolt hole cleats.
Size 37 - 48

BMX

Shoes



408 g/pc (#42)

Rubber Sole

Sole made from natural rubber.

Stiffness 5

Velcro straps



► E-SB7011



BMX SHOES

Built to be tough and durable on the outside, yet soft and comfortable on the inside. It features a detachable lace cover, breathable upper, a natural rubber non-slip sole, and a midsole that utilizes Exustar's proprietary dual-stiffness technology. The shoe is designed to be used with clip-in pedals (2 bolt hole cleats).

- Detachable Velcro lace cover
- Highly breathable
- Non-slip sole

Upper	PU leather with elastic mesh and large air holes.
Closure	Laces, detachable Velcro lace cover.
Sole	Non-slip rubber.
Midsole	Bio sole
Insole	Washable, EVA.
Interface	2 bolt hole cleats.
Size	37 - 48

SANDALS

Shoes





469 g/pc (#42)

Rubber Sole

Sole made from natural rubber.

Stiffness 5

Protective toe guard



Screw-on cleat recess cover



Some Exustar shoes come with our 2nd generation cleat recess cover which is screw-on, and reusable. The cleat recess cover gives a rider the option to use shoes with or without cleats/clip-in pedals. To ride without cleats, the cover remains in place. No more knives and messy cutting.

Color Options



E-SS515E



E-SS515F

E-SS515D



MTB SANDALS

Sport level sandals. This MTB sandal features a comfortable upper with four adjustable straps, toe guard, and a rubber sole. Compatible with clip-in or platform pedals.

- Toe guard
- Breathable strap underlay for barefoot comfort
- Screw-on cleat recess cover

- Upper** Natural suede, breathable strap underlay.
- Closure** Velcro straps.
- Sole** Rubber with EVA wedge. Screw-on cleat recess cover.
- Midsole** Bio sole.
- Footpad** EVA.
- Interface** 2 bolt hole cleats.
- Size** 37 - 38, 39 - 40, 41 - 42, 43 - 44, 45 - 46, 47 - 48



415 g/pc (#42)

Rubber Sole

Sole made from natural rubber.

Stiffness 5

Protective toe guard



Thick, comfortable footbed



Strap underlay for barefoot comfort



Screw-on cleat recess cover



Some Exustar shoes come with our 2nd generation cleat recess cover which is screw-on, and reusable. The cleat recess cover gives a rider the option to use shoes with or without cleats/clip-in pedals. To ride without cleats, the cover remains in place. No more knives and messy cutting.

E-SS503



MTB SANDALS

This MTB sandal features a comfortable upper with four adjustable straps, toe guard, and a rubber sole. Compatible with clip-in or platform pedals.

- Toe guard
- Breathable strap underlay for barefoot comfort
- Screw-on cleat recess cover

- Upper** PU leather, neoprene strap underlay, reflective swatch.
- Closure** Velcro straps.
- Sole** Rubber with screw-on cleat recess cover.
- Midsole** Bio sole.
- Footbed** EVA.
- Interface** 2 bolt hole cleats.
- Size** 37 - 38, 39 - 40, 41 - 42, 43 - 44, 45 - 46, 47 - 48

INDOOR / SPORT

Shoes

NEW GENERATION SEMI-FLEXIBLE SPORT SOLE



Wider design.



Semi-flexible mid-sole makes for a more walkable shoe.



Highly flexible, resilient, lightweight EVA wedge.



E-OS808

High abrasion resistance rubber outsole.



358 g/pc (#42)

Rubber Sole

Recycle environmentally friendly materials.

Stiffness 5

E-SP838



INDOOR CYCLING SHOES

Sport level indoor shoe. It features a Smooth Form upper with breathable mesh and Velcro straps. The highly flexible lightweight EVA with environmentally-friendly recycled rubber sole enables non-slip, comfortable walking. Compatible with clip-in or platform pedals.

- Smooth Form upper
- Highly flexible midsole
- Cleat position indicator

- Upper** Hot melt TPU, breathable mesh.
- Closure** Velcro straps.
- Sole** Rubber with EVA wedge.
- Midsole** Nylon.
- Insole** Ergonomic arch-design washable EVA.
- Footpad** EVA.
- Interface** 2 bolt hole cleats.
- Size** 37 - 48



309 g/pc (#42)

Color Option



E-SP818-BL

Rubber Sole

Sole made from natural rubber.



E-SP818



INDOOR CYCLING SHOES

This versatile sneaker-style shoe is designed for indoor cycling, urban cycling or recreational cycling and is compatible with clip-in pedals or platform pedals. A compound rubber sole provides optimal grip on and off the bike.

- Upper PU leather, breathable mesh, with elastic band.
- Closure Velcro Straps.
- Sole EVA+RB.
- Midsole Nylon.
- Insole Washable perforated EVA.
- Interface 2 bolt hole cleats.
- Size 37 - 48



302 g/pc (#42)

Rubber Sole

Sole made from natural rubber.



E-SP828



INDOOR CYCLING SHOES

This versatile sneaker-style shoe is designed for indoor cycling, urban cycling or recreational cycling and is compatible with clip-in pedals or platform pedals. A compound rubber sole provides optimal grip on and off the bike.

- Upper PU film with breathable mesh.
- Closure Laces.
- Sole EVA+RB.
- Midsole Nylon.
- Insole Washable perforated EVA.
- Interface 2 bolt hole cleats.
- Size 37 - 48

PATENTED

ADVANCED



302 g/pc (#42)

SIZE 35-48

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

SIZE 49-59

Sidewall Carbon Fiber Sole **Stiffness 10**

Our top of the line sole, Sidewall offers maximum power transfer, impact protection, comfort, and light weight.

Microlock M2 closure



E-SR4153-WHBK



FULL SIZE RANGE SHOES

An indoor cycling shoe engineered for top performance. It features a contoured, supple PU leather upper, with breathable mesh, and a Microlock buckle. The sole has built-in Air Control vents to help keep you cool, and non-slip walk pads are ready when your feet touch the ground. With nylon-fiberglass composite or carbon fiber soles (depending on size).

- Wide range of sizes including extra large
- Microlock M2 buckle
- Cleat position indicator

- Upper** PU leather, breathable mesh.
- Closure** Microlock M2 buckle, Velcro straps.
- Sole** Nylon-fiberglass composite (35-48). Carbon fiber sole (49-59).
- Insole** Washable perforated EVA.
- Interface** 3 bolt hole cleats.
- Size** 35 - 48 (Nylon-fiberglass composite sole); 49 - 59 (Carbon fiber sole).

FULL SIZE RANGE SHOES (Size 35-59)

Exustar introduces our first large size cycling shoes. With sizes ranging from 35-59, this high-end product is perfect for the discerning indoor or outdoor cyclist with larger feet.



E-SR4153-WH/BK

Color Options



E-SR4153-WH/OG



E-SR4153-BK/WH



E-SR4153



SIZE 35-48

Stiffness 7

Nylon-fiberglass Composite Sole

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.



SIZE 49-59

Stiffness 10

Sidewall Carbon Fiber Sole

Our top of the line sole, Sidewall offers maximum power transfer, impact protection, comfort, and light weight.


SIZE 35-48

EURO	35	36	37	38	39	40	41	42	43	44	45	46	47	48
US	3.5	4	4.5	5.5	6.5	7	8	8.5	9.5	10.5	11	12	13	13.5
UK	2.5	3	3.5	4.5	5.5	6	7	7.5	8.5	9.5	10	11	12	12.5
JP	22.5	23.0	23.5	24.0	25.0	25.5	26.0	27.0	27.5	28.5	29.0	29.5	30.5	31.0

SIZE 49-59

EURO	49	50	51	52	53	54	55	56	57	58	59
US	14.5	15	16	16.5	17.5	18	19	20	20.5	21.5	22
UK	13.5	14	15	15.5	16.5	17	18	19	19.5	20.5	21
JP	31.5	32.0	33.0	33.5	34.0	35.0	35.5	36.0	37.0	37.5	38.0


FULL SIZE RANGE SHOES

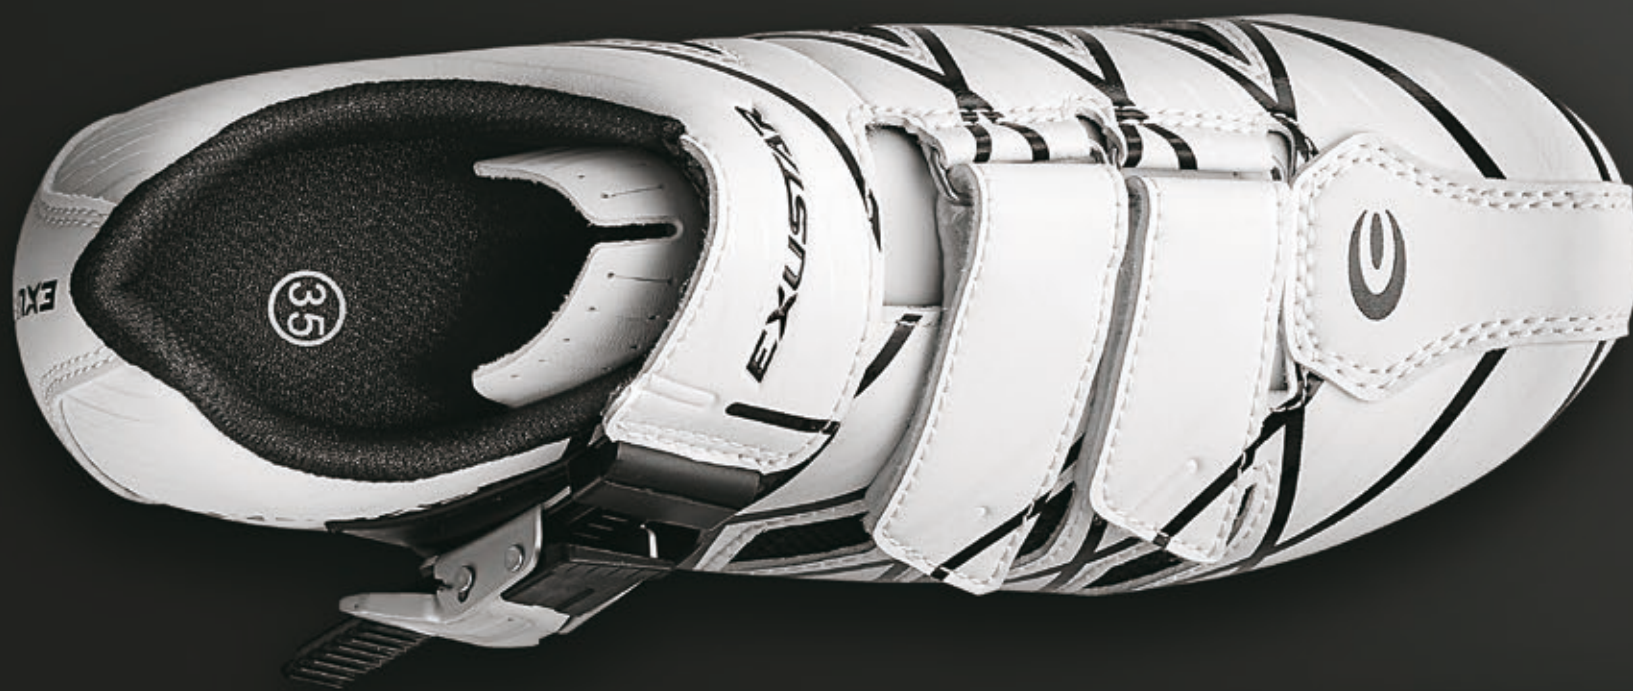

SIZE 35–48

NYLON-FIBERGLASS COMPOSITE SOLE

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

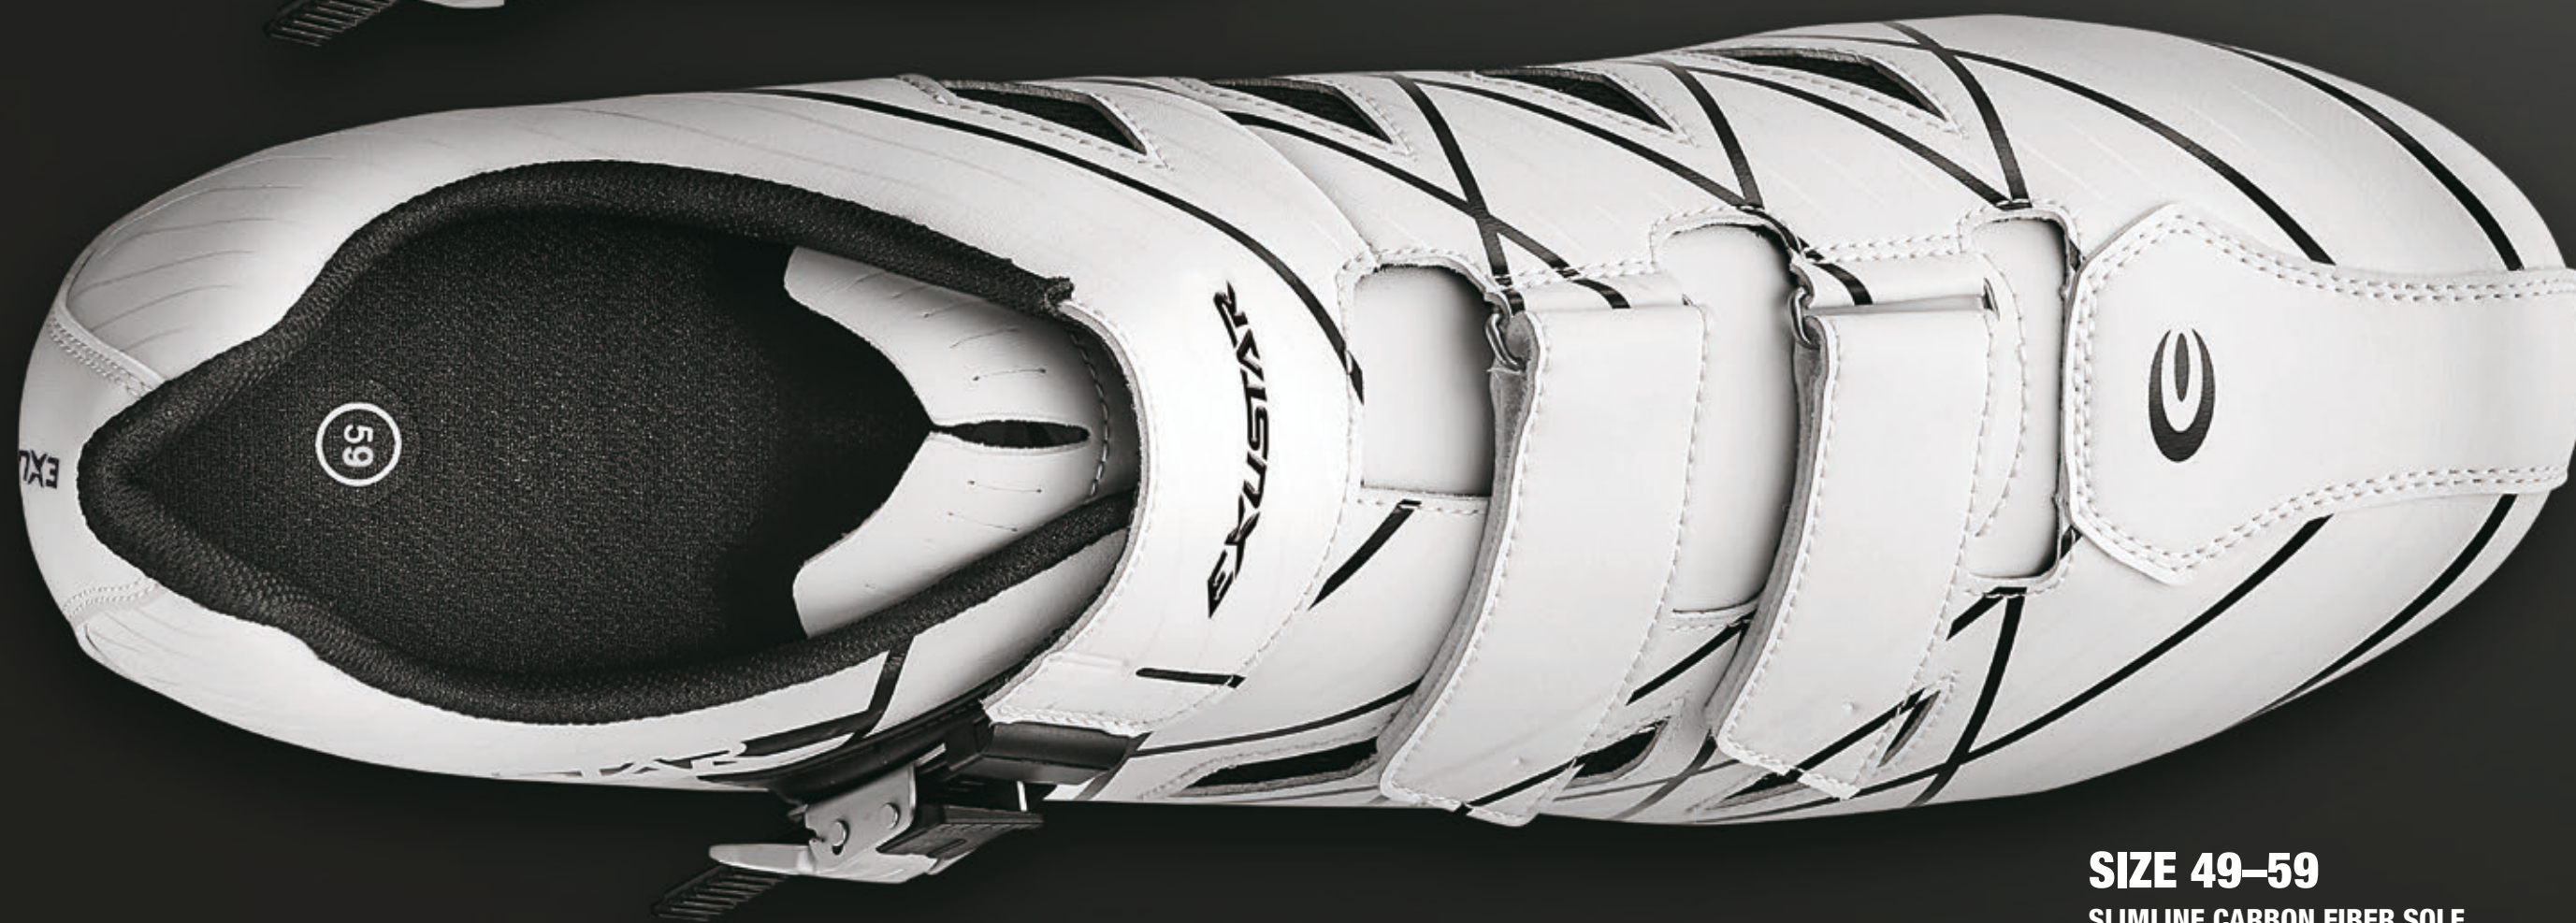

SIZE 49–59


SLIMLINE CARBON FIBER SOLE

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

HELMETS



Helmet Technology



AIR VENTS

Help keep your head cool at the hottest times.



BUG BLOCK MESH LINER

Keeps flying insects at bay.



VENTILATION CHANNELS

In conjunction with Air Vents, help regulate the flow of cool air and the expulsion of hot air from around your head.



SUN VISOR

Removable, snap-in visor helps keep sun off your face.



RATCHET WHEEL SIZE ADJUSTMENT

On or off your head, adjustment is one-handed cinch.



POSITION LOCKING STRAP BUCKLE

After adjusting straps and locking them in position, you won't have to worry about them again.



288 g/pc

Color Options



E-BHM122-1-MCMRD



E-BHM122-1-MCMGR



E-BHM122-1-MCMBL



► E-BHM122-1-MCMOD

BICYCLE HELMET

In-mold, bonded construction with 20 air-vents.

- Secure, adjustable locking buckle harness.
- Ratchet wheel allows easy micro-sizing adjustment.
- Bug mesh keeps insects out.
- Removable blade visor blocks sunlight.
- Removable, washable padding.

Meets CE safety standard.

Size 56 - 62 cm



210 g/pc

Color Options



E-BHR122-MRD



► E-BHR122-MWH

BICYCLE HELMET

In-mold, bonded construction with 30 air-vents.

- Secure, adjustable locking buckle harness.
- Ratchet wheel allows easy micro-sizing adjustment.
- Removable, washable padding.

Meets CE safety standard.

Size M(55-58cm),L(58-61cm)



270 g/pc

Color Options



E-BHR123-MBL



E-BHR123-MGY



E-BHR123-MTB



► E-BHR123-BK

BICYCLE HELMET

In-mold, bonded construction with 23 air- vents.

- Secure, adjustable locking buckle harness.
- Ratchet wheel allows easy micro-sizing adjustment.
- Bug mesh keeps insects out.
- Removable, washable padding.

Meets CE safety standard.

Size M(54-58cm),L(58-62cm)



230 g/pc

► E-BHM125-OD

BICYCLE HELMET

In-mold, bonded construction with 25 air- vents.

- Secure, adjustable locking buckle harness.
- Ratchet wheel allows easy micro-sizing adjustment.
- Bug mesh keeps insects out.
- Removable blade visor blocks sunlight.
- Removable, washable padding.

Meets CE safety standard.

Size M(54-58cm),L(58-62cm)



320 g/pc

Color Options



E-BHM124-MRD



E-BHM124-MBL



E-BHM124-MWH



► E-BHM124-MBK

BICYCLE HELMET

In-mold, bonded construction with 17 air- vents.

- Secure, adjustable locking buckle harness.
- Ratchet wheel allows easy micro-sizing adjustment.
- Bug mesh keeps insects out.
- Removable blade visor blocks sunlight.
- Removable, washable padding.

Meets CE safety standard.

Size M(55-58cm),L(58-61cm)



263 g/pc

► E-BHC301-BL

BICYCLE HELMET

In-mold, bonded construction with 33 air- vents.

- Secure, adjustable locking buckle harness.
- Ratchet wheel allows easy micro-sizing adjustment.
- Bug mesh keeps insects out.
- Removable blade visor blocks sunlight.
- Removable, washable padding.

Color Options



E-BHC301-RD



E-BHC301-GR



















Meets CE safety standard.










Size 56 - 60 cm.

EYEWEAR




EYEWEAR TECHNOLOGY

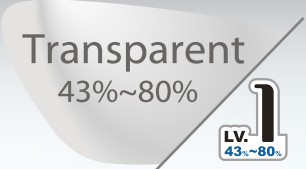FEATURING REMOVABLE, REPLACEABLE LENSES FOR ALL SEASONS			
Cat.	Visable	Weather	Usage
	80%~100%		Clear lenses, for night time or low light riding .
	43%~80%		Low light riding
	18%~43%		Sunny conditions
	8%~18%		Suitable for sunny day or water sports .
	3%~8%		Snowy conditions. (Unsuitable for driving)
MATERIAL		CHARACTERISTICS	
	Polarized Lenses (PCPL)	Exustar PCPL glasses are constructed with lenses from Sankoh of Japan. Polarized film is laminated between two lenses and acts like a special window shade to block harmful light rays, while letting in full vision • Outstanding color perception • Enhanced contrast vision • Glare-free	
	Polycarbonate Lenses (PC)	• 100% UV protection • Impact resistant • Heat resistant • Lightweight	
	TR90 Frames	Manufactured from TR90 material by EMS Grilamid of Switzerland. • Heat resistant • Chemical resistant • Lightweight	
	Polycarbonate Frames (PC)	• Impact resistant • Heat resistant • Lightweight	
	Eyeglass Lens Frames	Attach eyeglass lenses to frames.	
	Sunglasses Strap	For use during vigorous sports.	

DARK GREY	ORANGE	TRANSPARENT
 Dark grey 8%~18%  	 Orange 43%~80%  	 Transparent 43%~80%  



Photochromic lenses
13% ~ 53%



Sweat control band



Adjustable nose pad.



Adjustable lens angle.



Adjustable temple tips.



28 g/pc

► E-CSG30

SUNGLASSES

Durable sunglasses featuring non-slip earpieces to keep glasses in place.

- One-piece UV400 lens
- Lightweight, durable TR90 polymer frame
- Non-slip earpieces

CE certified.

Frame Polycarbonate: non-slip earpieces.
Lens One-piece PC polarized.
UV Protection 400.



Purple Revo
32 g/pc


Color Options



E-CSG29-BL Blue Revo



E-CSG29-OG Red Revo



E-CSG29-LG Green Revo

► E-CSG29-BK

CYLINDRICAL LENS SUNGLASSES

• Anti-fouling, anti-fog coating, anti- scratch

• Water and water vapour repellent lens

• Easy to clean lens

• Face-fitting shape

• UV 400 protection

CE certified.

Frame Polycarbonate: non-slip earpieces, adjustable nose pad.
Lens One-piece cylindrical polycarbonate: water and water vapour repellent, anti-fouling, anti-static, easy to clean.
UV Protection 400.





35 g/pc

Color Options



E-CSG24-TRGY



E-CSG24-MBK



E-CSG24-WH



► E-CSG24-MBL

SUNGLASSES

Durable sunglasses featuring non-slip earpieces to keep glasses in place.

- One-piece UV400 lens
- Lightweight, durable TR90 polymer frame.
- Adjustable nose pad.
- Face-fitting shape.
- With two sets of tinted lens.

CE certified.



Red Revo Dark grey Transparent



Green Revo
33 g/pc

Color Options



E-CSG23-RD



Red Revo



E-CSG23-WH



Blue Revo



E-CSG23-GY



Blue Revo



► E-CSG23

SUNGLASSES

Durable sunglasses featuring non-slip earpieces to keep glasses in place.

- One-piece UV400 lens
- Non-slip earpieces
- Adjustable nose pad

CE certified.

Frame Polycarbonate, non-slip earpieces. UV400 protection.
Lens One-piece polycarbonate.
Nose Pad Adjustable.



Dark grey Transparent



30 g/pc

Color Options



E-CSG18-BK (Black-red)



E-CSG18-WH (White-red)

► E-CSG18-GR (Green-blue)




PHOTOCHROMIC SUNGLASSES

Photochromic lenses change from light to dark automatically depending on the amount of ultraviolet light exposure.

- Adjustable lens angle allows two light settings.
- Adjustable temple.
- Adjustable nose pad.
- Durable TR90 polymer frame.
- Anti-scratch nano lens coating.
- UV400 protection

Visibility Range 13 - 53% (Cat. 1 - Cat. 3).

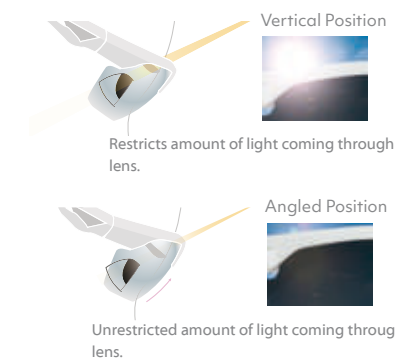

Vertical Position

Restricts amount of light coming through lens.

Angled Position

Unrestricted amount of light coming through lens.

BOTTLE CAGES



PATENTED



Color Option



E-BC64-BL



E-BC64-YL

28 g/pc

► E-BC64-MBK

CARBON FIBER BOTTLE CAGE

Colors Black, Blue, Yellow.

Weight 28 ± 2 g/pc.



PATENTED



Black

Color Options



E-BC501-WH



E-BC501-RD

► E-BC501-BK

BOTTLE CAGE

Paint finished nylon+fiberglass.

Colors Black, White, Red.

PATENTED



Color Options



E-BC200K

Colors Carbon fiber finish, Black.

► E-BC200C

BOTTLE CAGE

PC

PATENTED



Color Options



Colors Black, White, Silver, Red, Blue.

► E-BC500-BK

BOTTLE CAGE

Paint finished nylon+fiberglass.

PATENTED



► E-BC63TF-SL

CARBON FIBER BOTTLE CAGE

Colors Silver, Red, Yellow.

Weight 15 ± 2 g/pc.

Color Options



E-BC63-RD (Red)



E-BC63-YL
(Fluorescent Yellow)

► E-BC503-GY

BOTTLE CAGE

Paint finished nylon+fiberglass.

Colors Grey, Blue, Black, White.

Color Options



E-BC503-BL



E-BC503-BK



E-BC503-WH

► E-BC504-BK

BOTTLE CAGE

Paint finished nylon+fiberglass.

Colors Black, Grey, White, Red.

Color Options



E-BC504-GY



E-BC504-WH



E-BC504-RD



Color Options



E-BBW10-1-BK

► E-BBW10-1

WATER BOTTLE

- Easy open nozzle
- Full flow water stream
- Easy grip cap

BPA-free Polypropylene.

Capacity 600 ml.



► E-BBW11-1

WATER BOTTLE

- Easy open nozzle
- Full flow water stream
- Easy grip cap

BPA-free Polypropylene.

Capacity 800 ml.



GLOVES

MEN'S



Color Option



E-CG739-RD

► E-CG739-BL



FULL FINGER GLOVES

- Breathable vented palm
- Comfortable, durable and machine-washable
- Silicon-coated fingers for better grip

Palm	Microfiber leather with vented palm.
Back	Polyester with digital sublimation printing.
Wrist	Spandex.
Thumb Wipe	Terry cloth.
Size	S - M - L - XL.



Color Option



E-CG737

► E-CG736



FULL FINGER GLOVES

- Touch screen fingertips.
- Silicon-coated fingers for better grip.
- Breathable vented palm.
- Comfortable, durable and machine-washable.

Palm	Microfiber leather with vented palm and silicon-printing.
Back	Polyester with digital sublimation printing.
Wrist	Elastic spandex.
Thumb Wipe	Terry cloth.
Size	S - M - L - XL.



Color Options



E-CG905-WH

► E-CG905-RD



GLOVES

- Breathable vented palm
- Comfortable, durable and machine-washable
- Silicon grip

Padding	Gel (3mm).
Palm	Microfiber leather with vented palm.
Back	Pliable, breathable spandex.
Thumb Wipe	Terry cloth.
Closure	Adjustable Velcro straps.
Size	S - M - L - XL.



Color Options



E-CG343-GY



E-CG343-GR



E-CG343-WHRD

► E-CG343-BL



GLOVES

- Breathable vented palm
- Comfortable, durable and machine-washable

Padding	Foam.
Palm	Microfiber leather with vented palm.
Back	Pliable, breathable spandex.
Thumb Wipe	Terry cloth.
Closure	Adjustable Velcro straps.
Size	S - M - L - XL.



► E-CG903



GLOVES


- Gel padding.
- Synthetic suede reinforcing pull ring for easy take off.
- Breathable vented palm.
- Comfortable, durable and machine-washable.

Padding	Gel (3mm).
Palm	Microfiber leather.
Back	Pliable, breathable spandex.
Thumb Wipe	Terry cloth.
Size	S - M - L - XL.



Gel Padding

Gel-Pro Padding, no matter what position of rider's hand on the handlebar, all could make the rider feel comfortable.



Pull rings for easy to take off the glove.

► E-CG902-AG



GEL GLOVES

- Gel padding.
- Silicon grip.
- Breathable vented palm.
- Comfortable, durable and machine-washable.

Padding	Gel (3mm).
Palm	Microfiber leather with vented palm and silicon-printing.
Back	Pliable, breathable spandex.
Thumb Wipe	Terry cloth.
Closure	Adjustable Velcro straps.
Size	S - M - L - XL.



Color Options



E-CG982-GY

E-CG982-BK

E-CG982-RD


E-CG982-BL

► E-CG982-WH



RACING GLOVES

- Shock absorbing gel padding
- Perforated palm for improves ventilation.



Gel Padding


Gel-Pro Padding, no matter what position of rider's hand on the handlebar, all could make the rider feel comfortable.

Padding Gel

Palm Microfiber

Back Elastic Spandex

Size S - M - L - XL.



Pull rings for easy to take off the glove.




► E-CG170A



GLOVES

- Pittard's goat leather palm provides great bar feel and excellent breathability.
- Proper gel chamois increase comfort and precise control.
- Stretchable fabric top is soft and breathable.
- Digital sublimation printing with reflective piping.
- Terry cloth on thumb area for sweat wicking.
- Adjustable Velcro closure for perfect fit.

Size S - M - L - XL.

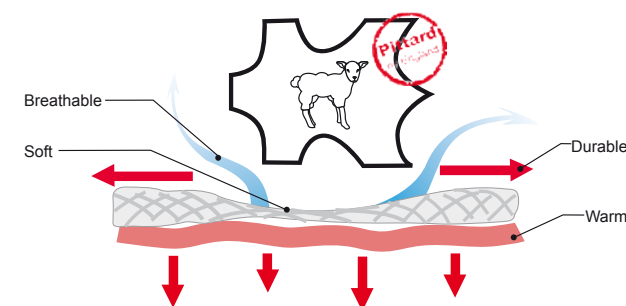

Color Option



E-CG950-RD/BK

► E-CG950



RACING OR TOURING GLOVES

- Vented microfiber leather with gel chamois on palm absorbs shock.
- Synthetic suede reinforcing pull ring for easy take off.
- Air-flow system on palm improves ventilation.
- Stretchable fabric with durable mesh top is soft and breathable.
- Terry cloth on thumb area for sweat wicking.
- Adjustable Velcro closure for perfect fit.

Size XS - S - M - L - XL - XXL.



Color Option



E-CG282-RD

► E-CG282-AG



GLOVES

- Breathable microfiber leather increases ventilation.
- Foam chamois for perfect shock absorption.
- Terry cloth thumb swatch for wiping away sweat.
- Velcro straps for adjustable closure.

Size S - M - L - XL.

GLOVES

WOMEN'S



► E-CG904W

WOMEN'S GEL GLOVES


- Gel padding
- Synthetic suede reinforcing pull ring for easy take off
- Breathable vented palm
- Comfortable, durable and machine-washable

Padding	Gel (3mm).
Palm	Microfiber leather.
Back	Pliable, breathable spandex.
Thumb Wipe	Terry cloth.
Size	S - M - L - XL.



JERSEYS

Clothing



RideCool 2

Classic moisture-wicking fabric.

The 2nd generation of our RideCool fabric has the same moisture wicking, heat-retarding, and heat expelling properties that keep you cool and comfortable, but is now 13% lighter, and softer.

All seasons use
Polyester




RideCool 3

Classic moisture-wicking fabric.

Classic moisture-wicking now comes in a brilliant, glossy fabric. The effective moisture wicking properties of RideCool 3 fabric helps keep your skin dry, while its heat-retarding, and heat expulsion characteristics assist in keeping you cool and comfortable.

All seasons use
Triangular profile polyester




RideCool 7

Classic moisture-wicking fabric with UV40+protection.

The effective moisture wicking properties of RideCool 7 fabric help keep your skin dry, while its heat-retarding and heat expulsion characteristics assist in keeping you cool and comfortable. The exceptional water absorption properties of ShinCool yarn help provide effective adjustments to body temperature and humidity. Highly hydrophilic properties also help to effectively disperse static electricity buildup and suppress electrostatic discharge, thereby improving wearer comfort. With UV40+ protection.

All seasons use
Polyester




RideCool 8

Classic moisture-wicking fabric with UV40+protection.

The effective moisture wicking properties of RideCool 7 fabric help keep your skin dry, while its heat-retarding and heat expulsion characteristics assist in keeping you cool and comfortable. The exceptional water absorption properties of ShinCool yarn help provide effective adjustments to body temperature and humidity. Highly hydrophilic properties also help to effectively disperse static electricity buildup and suppress electrostatic discharge, thereby improving wearer comfort. With UV40+ protection.

All seasons use
Polyester




RideAir 2

Lets cool air in, expels hot air.

RideAir 2 features a large hole weave that amplifies the cooling function of the fabric. It also features excellent moisture wicking properties, efficient heat-retarding and heat expulsion characteristics, and a high level of elasticity.

Summer use
Polyester + Elastane




RideAir 3

Lets cool air in, expels hot air.

RideAir 3 features a large hole weave that amplifies the cooling function of the fabric. It also features excellent moisture wicking properties, efficient heat-retarding and heat expulsion characteristics, and a high level of elasticity.

Summer use
Polyester + Elastane




RideFlex

Maximum elasticity, maximum comfort.

RideFlex fabric features excellent moisture wicking properties, heat-retarding and heat expulsion characteristics, with the addition of elastic fiber that hugs the body and supports the muscles.

All seasons use
Polyester + Elastane



RideFlex 3

Fabric with maximum elasticity, maximum comfort with UV40+ protection..

RideFlex 3 fabric features excellent moisture wicking properties, heat-retarding and heat expulsion characteristics, with the addition of elastic fiber that hugs the body and supports the muscles. RideFlex 3 is softer, and has even greater elasticity than earlier generations of Ridelflex.

All seasons use
Polyester+Elastane




RideElite

High-tech moisture-wicking fabric.

RideElite is our most advanced fabric, a new standard for high performance cycle sports. RideElite blends the state-of-the-art moisture wicking properties of Coolmax fabric, with the external heat-retarding, and body heat expulsion characteristics of CoolBestII. It is a unique formula, perhaps the coolest, most comfortable cycle fabric on the market.

For hot, humid weather use / All seasons use
Polyester (Coolmax 45% + Coolbest II 55%)




RideNON-SLIP

Anti-slip elastic fabric.

RideNON-SLIP fabric was created to keep cuffs and leg openings firmly in place without any loss of comfort.

All seasons use
Spandex




RideElastan

Body hugging muscle support.

Our moisture wicking elastane stretch fabric hugs the body and supports the muscles, springing back into shape time after time. With the added benefit of a special quick dry treatment, RideElastan spreads moisture over a larger surface, speeding evaporative cooling—that means a dryer ride. Smooth, comfortable surface.

All seasons use
Nylon + Elastane



RideFlex 4

Maximum elasticity, maximum comfort.

RideFlex 4 fabric features excellent moisture wicking properties, heat-retarding and heat expulsion characteristics, with the addition of elastic fiber that hugs the body and supports the muscles—eliminating the need for elastic cuffs in sleeves.

All seasons use Polyester + Elastane

ROAD JERSEY

Concept
INSPIRED BY FRACTAL DIMENSION, COLOR-CHANGING MATERIAL AND GEOMETRIC FORMS.

Product Features:

Front and Rear Fabric – RideCool 3

This bright, glossy moisture-wicking fabric helps keep your skin dry, while its heat-retarding, and heat expulsion characteristics assist in keeping you cool and comfortable.

Pocket Fabric – RideCool 2

This fabric has moisture wicking, heat-retarding, and heat expelling properties that keep you cool and comfortable.


Side Fabric – RideAir 2

Features a large hole weave that amplifies the cooling function of the fabric with excellent moisture wicking properties.

Sleeve Fabric – RideFlex 4

This fabric features excellent moisture wicking properties, heat-retarding and heat expulsion characteristics, with the addition of elastic fiber that hugs the body and supports the

YKK Zippers
Equipped with smooth-running, tough, and famously reliable YKK zippers.



RideCool 3
Moisture-wicking fabric.



RideFlex 4

RideAir 2
Lets cool air in, expels hot air.

RideCool 2

► E-CJ112

JERSEY

- Close-fitting and aerodynamic
- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- UV protection
- 4 pockets

Color Options



E-CJ112-WH

Primary Fabric	RideCool 3.				
Secondary Fabric	RideAir 2, RideCool 2.				
Pockets	Four, including one zippered pocket.				
Closure	Full-length zipper.				
Waistband	Anti-slip rear waistband.				
Cuffs	RideFlex 4.				
Size	S - M - L - XL - XXL.				

E-CJ112					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	41.5	44	46.5	49	51.5
Sleeve	21	22	23	24	25
Length	63.5	66	68.5	71	73.5

MTB JERSEY

Concept
INSPIRED BY ORGANIC FORMS AND ALOGARITHMS.

Features:

Front and Shoulder Fabric – RideCool 3
This bright, glossy moisture-wicking fabric helps keep your skin dry, while its heat-retarding, and heat expulsion characteristics assist in keeping you cool and comfortable.

Rear and Pocket Fabric – RideCool 2
This fabric has moisture wicking, heat-retarding, and heat expelling properties that keep you cool and comfortable.

Side Fabric – RideAir 2
Features a large hole weave that amplifies the cooling function of the fabric with excellent moisture wicking properties.

Sleeve Fabric – RideFlex 4
This fabric features excellent moisture wicking properties, heat-retarding and heat expulsion characteristics, with the addition of elastic fiber that hugs the body and supports the muscles—eliminating the need for elastic cuffs.

YKK Zippers
Equipped with smooth-running, tough, and famously reliable YKK zippers.



RideCool 3
Moisture-wicking fabric.



RideFlex 4

RideCool 2

RideAir 2
Lets cool air in, expels hot air.

► E-CJ113

JERSEY

- Close-fitting and aerodynamic
- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- UV protection
- 2 pockets

Color Options



E-CJ113-BL


- Primary Fabric** RideCool 3.
- Secondary Fabric** RideAir 2, RideCool 2.
- Pockets** Two, including one invisible zippered pocket.
- Closure** 9" zipper.
- Waistband** Anti-slip rear waistband.
- Cuffs** RideFlex 4.
- Size** S - M - L - XL - XXL.

E-CJ113					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	41.5	44	46.5	49	51.5
Sleeve	21	22	23	24	25
Length	63.5	66	68.5	71	73.5




RideNON-SLIP
Comfortable hyper-elastic keep cuffs in place.

RideCool 3
Moisture-wicking fabric.



RideAir 2
Lets cool air in, expels hot air.



Pocket zipper.
Sweatproof pocket.

► E-CJ105

JERSEY

Close-fitting and aerodynamic.

- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- UV protection
- 4 pockets

Primary Fabric	RideCool 3.				
Secondary Fabric	RideAir 2, RideNon-slip.				
Pockets	Four, including one zippered pocket.				
Closure	Full-length zipper.				
Waistband	Anti-slip rear waistband.				
Cuffs	RideNon-slip.				
Size	S - M - L - XL - XXL.				

E-CJ105					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	44	46.5	49	51.5	54
Sleeve	22.5	24.5	26.5	28.5	30.5
Length	63.5	66	68.5	71	73.5




►E-CJ109

JERSEY

- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- UV protection
- 4 pockets
- Close-fitting and aerodynamic

Primary Fabric	RideCool 7.
Secondary Fabric	RideAir 2, RideFlex 3.
Pockets	Four, including one zippered pocket.
Closure	Full-length zipper.
Waistband	Anti-slip rear waistband.
Cuffs	RideFlex 3.
Size	S - M - L - XL - XXL.

E-CJ109						
Measure	S	M	L	XL	XXL	
Size/cm						
1/2 Bust	44	46.5	49	51.5	54	
Sleeve	22	23	24	25	26	
Length	63.5	66	68.5	71	73.5	

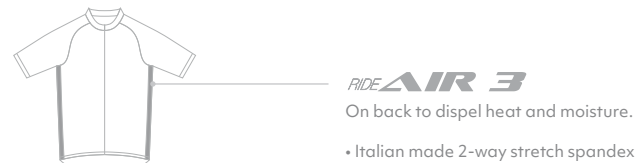

►E-CJ97

JERSEY

- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- 4 pockets

Color Options



E-CJ97-RD

Primary Fabric	RideCool 2.					
Secondary Fabric	RideAir 3.					
Pockets	Four, including one zippered pocket.					
Closure	Full-length zipper.					
Waistband	Anti-slip band.					
Size	S - M - L - XL - XXL.					

E-CJ97						
Measure	Size/cm	S	M	L	XL	XXL
1/2 Bust		44.2	46.7	49.2	51.7	54.2
Sleeve		32	34	36	38	40
Length		63.5	66	68.5	71	73.5



Color Options



► E-CJ76

JERSEY

An extremely comfortable high performance short sleeve jersey. For hot, humid weather, or all seasons use.

This jersey is close-fitting and aerodynamic. A full length zipper makes getting it on and off a breeze, and is great for ventilation control. It has 4 convenient pockets, including a sweatproof, zippered pocket that keeps your phone dry. It also features a retaining ring to keep headset cord in place, and an anti-slip waistband.

Size S - M - L - XL - XXL.

E-CJ76					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	44.3	46.8	49.2	51.8	54.3
Sleeve	32.5	34.5	36.5	38.5	40.5
Length	63.5	66	68.5	71	73.5



Color Option



E-CJ84

► JERSEY

Close-fitting and aerodynamic jersey made from breathable, moisture and heat dispelling materials. A full length zipper makes getting it on and off a breeze, and is great for ventilation control. It has 4 convenient pockets, including a zippered pocket. It also features an anti-slip rear waistband. For all seasons use.

- Anti-slip rear waistband
- Full length zipper

Fabric RideCOOL 2, RideAir2.

Size S - M - L - XL - XXL.

E-CJ84					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	44.2	46.7	49.2	51.7	54.2
Sleeve	32	34	36	38	40
Length	63.5	66	68.5	71	73.5




► E-CJ86-GR/BK

JERSEY

Close-fitting and aerodynamic jersey made from breathable, moisture and heat dispelling materials. A full length zipper makes getting it on and off a breeze, and is great for ventilation control. It has 5 convenient pockets, including two sweatproof, zippered pocket. It also features an anti-slip rear waistband. For all seasons use.

- Sweatproof, zippered pocket
- Anti-slip rear waistband
- Full length zipper

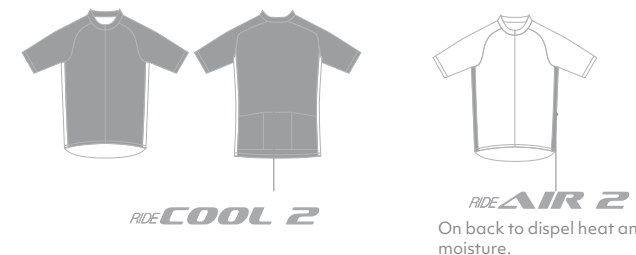

Fabric RideCOOL 2, RideAir2.

Size S - M - L - XL - XXL.

E-CJ86-GR/BK					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	44.2	46.7	49.2	51.7	54.2
Sleeve	32	34	36	38	40
Length	63.5	66	68.5	71	73.5




► E-CJ88-BL

JERSEY

- Digital sublimation printing with vivid colors and pattern
- 16" invisible zipper for ventilation
- Sweat wicking polyester fabric keeps skin dry and comfortable
- Raglan sleeves with elastic fabric improves dynamic stretchiness
- Waistband holds garment in position
- Three rear pockets, one with zipper
- Form-fit cutting

Size S - M - L - XL - XXL.

E-CJ88-BL					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	44.2	46.7	49.2	51.7	54.2
Sleeve	32	34	36	38	40
Length	63.5	66	68.5	71	73.5

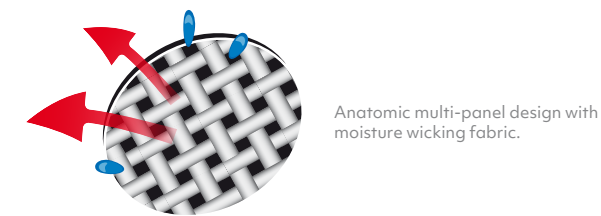

Anatomic multi-panel design with moisture wicking fabric.



► E-CJ63

JERSEY

- Moisture-wicking fabric
- Elastic, non-slip body-hugging
- Invisible zipper
- UV protection
- 4 pockets

Size L - XL

Measure	L	XL
Size/cm		
1/2 Bust	49.2	51.7
Sleeve	36	38
Length	68.5	71



► E-CJ64

JERSEY

- Moisture-wicking fabric
- Elastic, non-slip body-hugging
- Invisible zipper
- UV protection
- 4 pockets

Size M - L - XL - XXL.

Measure	M	L	XL	XXL
Size/cm				
1/2 Bust	46.7	49.2	51.7	54.2
Sleeve	34	36	38	40
Length	66	68.5	71	73.5



Color Option



E-CJ80L-GR

► E-CJ80L

LONG SLEEVE JERSEY

- Light, Quick Dry-treated polyester with Coolmax and Coolbest II anti-UV reflection
- Liner absorbs sweat rapidly
- 100% polyester mesh provides excellent cooling, and speeds sweat evaporation
- Waterproof inner pocket
- Comfortable silicone-lined waist gripper
- Hidden silicon elastic waistband

Size S - M - L - XL - XXL.

E-CJ80L					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	44.2	46.7	49.2	51.7	54.2
Sleeve	72	74	76	78	80
Length	63.5	66	68.5	71	73.5



► E-CJ110L

LONG SLEEVE JERSEY

Loose fit free ride jersey (worn over armor).

- Moisture-wicking fabric
- UV protection

Fabric RideCool.

Size S - M - L - XL.

E-CJ110L				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	56.5	59	61.5	64
Sleeve	72	74	76	78
Length	76	78.5	81	83.5



► E-CJ111L

LONG SLEEVE JERSEY

Loose fit free ride jersey (worn over armor).

- Moisture-wicking fabric
- UV protection

Fabric RideCool.

Size S - M - L - XL.

E-CJ111L				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	56.5	59	61.5	64
Sleeve	72	74	76	78
Length	76	78.5	81	83.5

MULTIFLEX BIB SHORTS


Clothing

E-CPC07

3D-contoured Chamois Pad



CHAMOIS

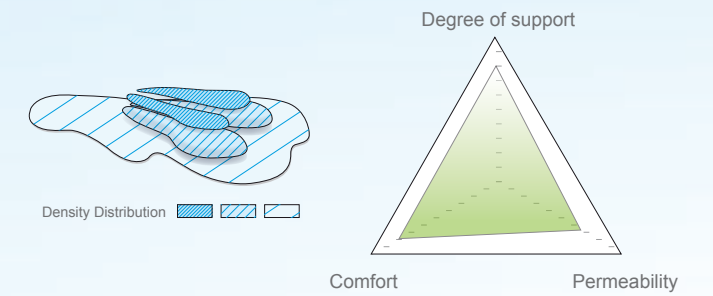


- Anatomic, seamless
- Multi-density for support and pressure relief
- Central channel relieves pressure on pudendal nerve
- Anti-bacterial, moisture wicking carbon microfiber

E-CPC08

3D-contoured Chamois Pad



CHAMOIS

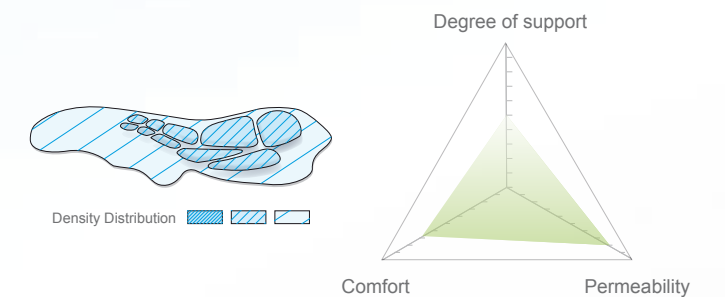


- Anatomic, seamless
- Multi-density for support and pressure relief
- Central channel relieves pressure on pudendal nerve
- Moisture wicking microfiber
- Perforated for extra heat and moisture dispersal

E-CPC06


3D-contoured Chamois Pad



CHAMOIS

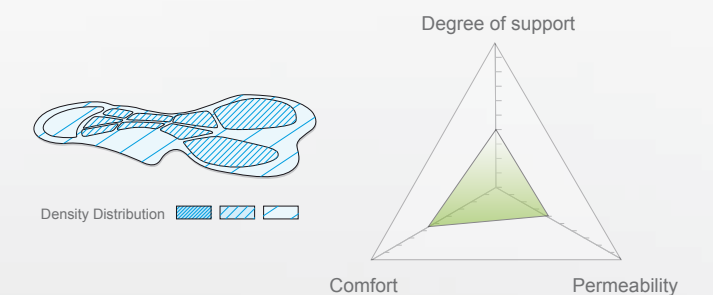

- Anatomic, seamless
- Multi-density for support and pressure relief
- Central channel relieves pressure on pudendal nerve
- Microfiber

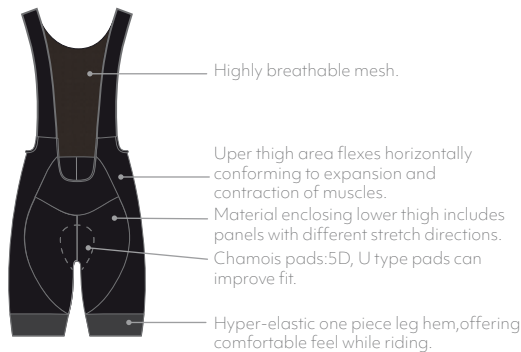


E-CB019

MULTIFLEX BIB SHORTS

Multiflex Bib shorts are constructed of panels with different stretch directions, conforming to the shape, position, and muscular movements of cyclists in motion. This allows support and compression exactly where it is needed, and extra flex where flex is needed, resulting in a more effective and comfortable riding experience.

Chamois Pad 5D-cut durable saddle shaped spandex.
Fabric RideElastan.
Color Black.
Size S - M - L - XL.

E-CB019					
Measure Size/cm	S	M	L	XL	
1/2 Waist	27.5	30	32.5	35	
1/2 Hip	30.5	33	35.5	38	
1/2 Bib length	38.3	39.6	40.9	42.2	
1/2 Leg opening	16.5	17.5	18.5	19.5	

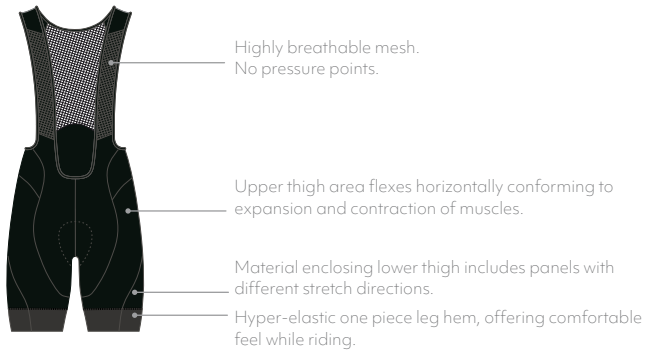


E-CB017

BIB SHORTS

Multiflex Bib shorts are constructed of panels with different stretch directions, conforming to the shape, position, and muscular movements of cyclists in motion. This allows support and compression exactly where it is needed, and extra flex where flex is needed, resulting in a more effective and comfortable riding experience.

Color Black.
Size S - M - L - XL - XXL.

E-CB017					
Measure Size/cm	S	M	L	XL	XXL
1/2 Waist	27.5	30	32.5	35	37.5
1/2 Hip	30.5	33	35.5	38	40.5
1/2 Bib length	38.3	39.6	40.9	42.2	43.5
1/2 Leg opening	18.5	19	19.5	20	20.5

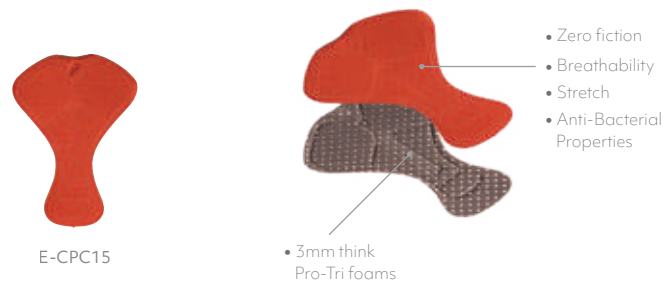

► E-CT14

TRIATHLON SUITS

- Comfortable padding
- Fatlock stitching
- Zipper drawstring

Primary Fabric Polyester and spandex.
Secondary Fabric Nylon and spandex.
Color Black.
Size S - M - L - XL.

E-CT14					
Measure Size/cm	S	M	L	XL	
1/2 Bust	33.5	36	38.5	41	
1/2 Waist	27.5	30	32.5	35	
Inner leg length	20	21	22	23	
1/2 Leg opening	19	20	21	22	



► E-CT13

TRIATHLON SUITS

- Comfortable fleece padding
- Fatlock stitching
- Zipper drawstring

Primary Fabric Polyester and spandex.
Secondary Fabric Nylon and spandex.
Color Black.
Size XS - S - M - L - XL.

E-CT13					
Measure Size/cm	XS	S	M	L	XL
1/2 Bust	31	33.5	36	38.5	41
1/2 Waist	25	27.5	30	32.5	35
Inner leg length	19	20	21	22	23
1/2 Leg opening	18	19	20	21	22



► E-CTK01




- SKINSUIT**
- UV protection
 - 80% polyester and 20% spandex in a breathable knit for greater comfort.
 - Front invisible zipper for easy on/off
 - 3D chamois of microfiber fabric for comfort
 - Overlock stitched seams
 - Elastic on sleeve and bottom for good fit
 - Digital color sublimation printing

Size M - L.

E-CTK01		
Measure	M	L
Size/cm		
1/2 Bust	45.5	48
1/2 Waist	33.5	36
Sleeve length	33.5	35.5
1/2 Leg opening	17	18

PANTS

Clothing

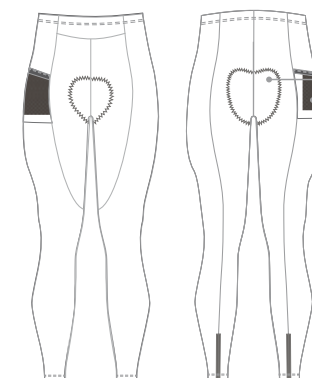

5D contoured chamois pad
1 side pocket



E-CPC08

► E-CP010

TIGHTS

- For cool, warm or hot conditions
- 5D-cut durable saddle shaped spandex
- Single piece abdomen avoids pressure lines
- 5D contoured chamois pad

Chamois Pad 5D anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal (E-CPC08).

Fabric Spandex with flatlock stitched seams.

Color Black.

Size S - M - L - XL - XXL.

E-CP010					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Waist	30	32	34	36	38
Inner leg length	64	67	70	71	72
1/2 Leg opening	11.5	12	12.5	13	13.5



Color Options



E-CMS006-BK



REMOVABLE LINER
Breathable (elastic mesh provides extra ventilation). Quick-drying, Soft and comfortable

► E-CMS006-RD

CASUAL-STYLE PANTS

- Lightweight and removable liner with 3D chamois
- 3D-contoured chamois pad
- Two zippered side pockets with reflective strips

Chamois Pad 3D anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal.

Fabric Polyester and spandex.

Color Red, Black.

Size S - M - L - XL.

E-CMS006				
Measure	S	M	L	XL
Size/cm				
1/2 Waist	37.5	40	42.5	45
Inner leg length	33	34	35	36
1/2 Leg opening	28	29	30	31



REMOVABLE LINER
Breathable (elastic mesh provides extra ventilation). Quick-drying, Soft and comfortable

► E-CMS005

CASUAL-STYLE PANTS

- Adjustable elastic band at the waist
- Lightweight and removable liner with 3D chamois
- 3D-contoured chamois pad
- 2 side pockets and zip thigh pocket


Chamois Pad 3D anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal.

Fabric Nylon and spandex.

Color Black.

Size S - M - L - XL.

E-CMS005				
Measure	S	M	L	XL
Size/cm				
1/2 Waist	37.5	40	42.5	45
Inner leg length	33	34	35	36
1/2 Leg opening	28	29	30	31



- Moisture-wicking breathable swatch.
- Reflective logo
- Reflective zipper



E-CPC08

E-CP009

THERMAL TIGHTS


For cool or cold conditions.

- 5D-cut durable saddle shaped spandex
- Single piece abdomen avoids pressure lines
- 5D contoured chamois pad
- Reflective logo and zipper


Chamois Pad 5D anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal (E-CPC08).

Fabric Fleece-lined spandex with flat lock stitched seams.
Color Black.
Size S - M - L - XL - XXL.

E-CP009					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Waist	30	32	34	36	38
Inner leg length	64	67	70	71	72
1/2 Leg opening	11.5	12	12.5	13	13.5



Pressure reducing 2 piece crotch.



Perfect fit 3D cut.



Anatomical leg band with silicon grips.



E-CPC06

E-CS49


PANTS

- 5D-cut durable saddle shaped spandex
- Single piece abdomen avoids pressure lines
- Hyper-elastic one piece leg hem provides extra comfort
- Crotch design reduces friction and discomfort


Chamois Pad 3D anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal.

Primary Fabric Spandex with flatlock stitched seams.
Color Black.
Size S - M - L - XL - XXL.

E-CS49					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Waist	28	30	32	34	36
Inner leg length	21.5	22	22.5	23	23.5
1/2 Leg opening	17.5	18	18.5	19	19.5



Pressure reducing 2 piece crotch.



Perfect fit 3D cut.



Anatomical leg band with silicon grips.



E-CPC06


► E-CS48

PANTS


- 5D-cut durable saddle shaped spandex
- Single piece abdomen avoids pressure lines
- Hyper-elastic one piece leg hem provides extra comfort
- Crotch design reduces friction and discomfort

- Chamois Pad** 3D anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal.
- Primary Fabric** Spandex with flatlock stitched seams.
- Secondary Fabric** RideNon-slip 1.
- Color** Black.
- Size** S - M - L - XL - XXL


E-CS48					
Measure Size/cm	S	M	L	XL	XXL
1/2 Waist	28	30	32	34	36
Inner leg length	22	22.5	23	23.5	24
1/2 Leg opening	18.5	19	19.5	20	20.5



Pressure reducing 2 piece crotch.



Perfect fit 3D cut.



Anatomical leg band with silicon grips.

Color Options



E-CS31-GY



E-CS31-BL



E-CPC06

► E-CS31

PANTS

- Anatomic, spandex shorts, comfortable for up to 4 hours of riding. These breathable, moisture-wicking shorts feature 3D anatomical cutting, and silicon leg grip swatches. For all seasons use but particularly suited to hot, humid weather.
- 3D-contoured chamois pad
 - Pressure reducing 2 piece crotch
 - Silicon leg grip swatches
- Fabric Spandex

Size S - M - L - XL - XXL.

E-CS31					
Measure Size/cm	S	M	L	XL	XXL
1/2 Waist	28	30	32	34	36
Inner leg length	22	22.5	23	23.5	24
1/2 Leg opening	15.5	16.5	17.5	18.5	19.5



E-CPC06


► E-CS29

PANTS

- Breathable sweat wicking composite material
- 3D-cut durable spandex
- Quick Dry-treated polyester
- 5D-cut durable saddle shaped spandex
- Single piece abdomen avoids uncomfortable pressure lines

Size S - M - L - XL - XXL.


E-CS29					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Waist	28	30	32	34	36
Inner leg length	22	22.5	23	23.5	24
1/2 Leg opening	18	19	20	21	22



Pressure reducing 2 piece crotch.



Perfect fit 3D cut.



Moisture-wicking, breathable swatch.

Color Options



E-CS25-RD



E-CS25-GY



E-CPC08

► E-CS25

PANTS

- 5D-cut durable saddle shaped spandex
- Comfortable, flexible non-elastic leg grips.
- Non-elastic spandex improved flexibility and movement
- Single piece abdomen avoids uncomfortable pressure lines
- Crotch design reduces friction and discomfort


Size S - M - L - XL - XXL.

E-CS25					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Waist	28	30	32	34	36
Inner leg length	22	22.5	23	23.5	24
1/2 Leg opening	15.5	16.5	17.5	18.5	19.5

WOMEN'S JERSEYS

Clothing



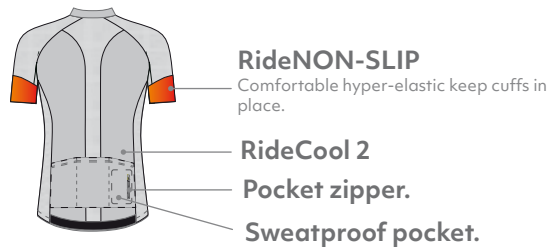


► E-CJ106W

WOMEN'S JERSEY

- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- UV protection
- 4 pockets
- Close-fitting and aerodynamic

Primary Fabric	RideCool 2.				
Secondary Fabric	RideAir 2, RideNon-slip.				
Pockets	Four, including one zippered pocket.				
Closure	Full-length zipper.				
Waistband	Anti-slip rear waistband.				
Cuffs	RideNon-slip.				
Size	S - M - L - XL - XXL.				

E-CJ106W					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	42	44.5	47	51.5	54
Sleeve	28	29	30	31	32
Length	61	63	65	67	69

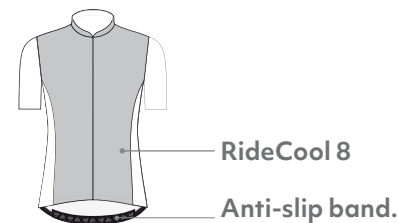

► E-CJ108W

WOMEN'S JERSEY

- Moisture-wicking fabric
- Lets cool air in, expels hot air
- Elastic, non-slip body-hugging
- UV protection
- 4 pockets
- Close-fitting and aerodynamic

Primary Fabric	RideCool 8.				
Secondary Fabric	RideAir 2, RideFlex 3.				
Pockets	Four, including one zippered pocket.				
Closure	Full-length zipper.				
Waistband	Anti-slip rear waistband.				
Cuffs	RideFlex 3.				
Size	S - M - L - XL - XXL.				

E-CJ108W					
Measure	S	M	L	XL	XXL
Size/cm					
1/2 Bust	42	44.5	47	51.5	54
Sleeve	19	20	21	22	23
Length	61	63	65	67	69



► E-CIV02

TANK TOP

- Wide shoulder straps
- Scoop neck with racerback
- Stretchy, slim fitting
- Reflective logo

Fabric Polyester and spandex with reflective logo.
Size S - M - L - XL.

E-CIV02				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	33	35	37	39
Length	55.5	58	60.5	63



► E-CCIP01

CASUAL TIGHTS


- Rear pocket
- Form-fitting comfort
- Reflective logo

Fabric Nylon and spandex with reflective logo.

Color Gray.

Size S - M - L - XL.

E-CCIP01				
Measure	S	M	L	XL
Size/cm				
1/2 Waist	33	35	37	39
Inner leg length	55	56	57	58
1/2 Leg opening	12.5	13	13.5	14

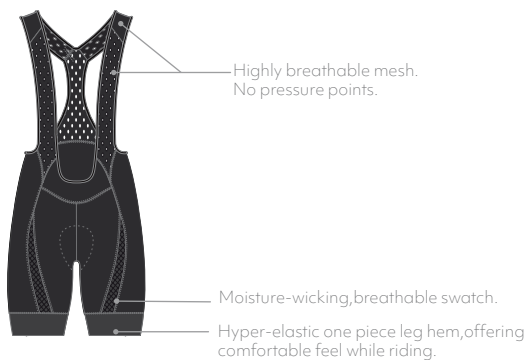

► E-CB018W


WOMEN'S MULTIFLEX BIB SHORTS

Multiflex Bib shorts are constructed of panels with different stretch directions, conforming to the shape, position, and muscular movements of cyclists in motion. This allows support and compression exactly where it is needed, and extra flex where flex is needed, resulting in a more effective and comfortable riding experience.

Chamois Pad Conforms perfectly to the female body form, 3d anatomic, seamless, multi-density for support and pressure relief, central channel relieves pressure on pudendal nerve, moisture wicking microfiber, perforated for extra heat and moisture dispersal.

Fabric RideElastan.
Color Black.
Size S - M - L - XL.

E-CB018W				
Measure	S	M	L	XL
Size/cm				
1/2 Waist	25	27.5	30	32.5
1/2 Hip	30.5	33	35.5	38
1/2 Bib length	37	38.3	39.6	40.9
1/2 Leg opening	18	18.5	19	19.5

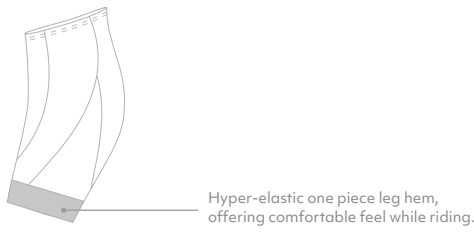

► E-CS46W

WOMEN'S PANTS

- 3D-cut durable saddle shaped spandex
- Hyper-elastic one piece leg hem provides extra comfort
- 3D contoured chamois pad

Chamois Pad Conforms perfectly to the female body form, 3d anatomic, seamless, multi-density for support and pressure relief. Central channel relieves pressure on pudendal nerve. Moisture wicking microfiber. Perforated for extra heat and moisture dispersal.

Primary Fabric Spandex with flatlock stitched seams.
Secondary Fabric RideNon-slip 1.
Color Black.
Size S - M - L - XL.

E-CS46W				
Measure	S	M	L	XL
Size/cm				
1/2 Waist	28	30	32	34
Inner leg length	19.5	20	20.5	21
1/2 Leg opening	17	18	19	20

SPORT SLEEVE SHIRTS

Clothing



► E-JT020

T-SHIRT

- Seamless, stretch fabric
- Moisture-absorbing

Fabric Seamless, soft knit stretch polyester with mesh ventilation. Moisture-absorbing.

Size S - M - L - XL - XXL - XXXL.

E-JT020						
Measure	S	M	L	XL	XXL	XXXL
Size/cm						
1/2 Bust	48	50.5	53	55.5	58	60.5
Sleeve	19	20	21	22	23	24
Length	63.5	66	68.5	71	72	72



►E-JT019

T-SHIRT

- Seamless, stretch fabric
- Moisture-absorbing

Fabric Seamless, soft knit stretch polyester with mesh ventilation.
Moisture-absorbing.

Size S - M - L - XL.

E-JT019				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	49	51	53	55
Sleeve	18.5	20	21	22
Length	63.5	66	68.5	71



Color Option



E-JT018-GR

►E-JT018-WH

T-SHIRT

- Seamless, stretch fabric
- Moisture-absorbing

Fabric Seamless, soft knit stretch polyester with mesh ventilation.
Moisture-absorbing.

Size S - M - L - XL.

E-JT018-WH				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	49	51	53	55
Sleeve	18.5	20	21	22
Length	63.5	66	68.5	71



► E-JT016

T-SHIRT

- Seamless, stretch fabric
- Moisture-absorbing

Fabric Seamless, soft knit stretch polyester with mesh ventilation.
Moisture-absorbing.

Size S - M - L - XL.

E-JT016				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	49	51	53	55
Sleeve	18.5	20	21	22
Length	63.5	66	68.5	71



►E-JT017

T-SHIRT

- Seamless, stretch fabric
- Moisture-absorbing

Fabric Seamless, soft knit stretch polyester with mesh ventilation. Moisture-absorbing.

Size S-M-L-XL.

E-JT017				
Measure	Size/cm			
	S	M	L	XL
1/2 Bust	49	51	53	55
Sleeve	18.5	20	21	22
Length	63.5	66	68.5	71



►E-JT013

T-SHIRT

- Cool, breathable polyester and spandex
- Anti-bacterial
- Comfortable, non-stitched rear pocket
- Reflective logo


Size S-M-L-XL-XXL-XXXL.

E-JT013						
Measure	Size/cm					
	S	M	L	XL	XXL	XXXL
1/2 Bust	48.5	51	53.5	56	58.5	61
Length	63.5	66	68.5	71	73.5	76

E-JT013W			
Measure	Size/cm		
	S	M	L
1/2 Bust	43	45.5	48
Length	60.5	63	65.5

JACKETS

Clothing

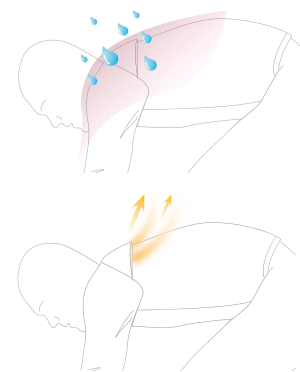

Water and wind resistant.

Breathable mesh.



Packs up light and small.



Reflective elements.

► E-CJK017

JACKET

- Water and wind resistant.
- Breathable mesh on back keeps you dry.
- Elastic cuffs keep wind out.
- Reflective elements add visibility.
- Hood is stored under neckline cover.
- Packs up light and small.
- Durable 30 denier.

Color Option



E-CJK017-RD

E-CJK017				
Measure	S	M	L	XL
Size/cm				
Half chest	52.5	55	57.5	60
Sleeve length	75	77	79	81
CB length, from neck	70	72.5	75	77.5



Color Option



E-SC012-RD

► E-SC012-GR

SHOE COVERS

- Semi-thermal
- RideFlex fabric
- Minimal seam design
- Aerodynamic
- Breathable
- Kevlar reinforced toe

- Fabric** RideFlex.
Closure Non-slip zipper.
Cuff Closure Anti-slip silicon band.
Color Lime-green & black, Red & black.
Size S - M - L - XL.


E-SC012					
Measure	S	M	L	XL	
Size/cm					
EURO	37-39	40-42	43-45	46-48	




Color Option



E-SC009-WH



RIDE FLEX
Breathable RideFlex fabric.



Kevlar reinforced toe.

► E-SC009

SHOE COVERS

- Semi-thermal
- RideFlex fabric
- Minimal seam design
- Aerodynamic
- Breathable
- Kevlar reinforced toe

- Fabric** RideFlex.
Closure Non-slip zipper.
Cuff Closure Anti-slip silicon band.
Color Red & black, White & black.
Size S - M - L - XL.

E-SC009					
Measure	S	M	L	XL	
Size/cm					
EURO	37-39	40-42	43-45	46-48	



SOCKS

CLOTHING

EXUSTAR

EPS-R

EXUSTAR



►E-BS022-RD

SOCKS

- Dual fabric
- Breathable
- Soft and comfortable
- Light and tight on leg

Fabric Nylon,polyester and spandex.
Size S - M - L - XL.



►E-BS030

SOCKS

- Sweat wicking
- Anti-bacterial
- Deodorizing
- Durable
- Breathable

Fabric Nylon and spandex.
Size S - M - L - XL.



►E-BS020-BL

SOCKS

- Dual fabric
- Breathable
- Soft and comfortable
- Light and tight on leg

Fabric Nylon,polyester and spandex.
Size S - M - L - XL.



►E-BS601-BK

COTTON SOCKS

- Soft and comfortable
- Breathable
- Durable

Fabric Cotton, nylon and spandex.
Size S - M - L - XL.




► E-BS640-GY

COMPRESSION SOCKS

- Reduces foot swelling and discomfort
- Stimulates blood flow
- Fights edema

Fabric Cotton, nylon and polyester.

Size S - M - L - XL.



► E-BS680-BKWH

COMBED COTTON SOCKS

- Soft and comfortable
- Breathable
- Durable

Fabric Cotton, polyester and spandex.

Size S - M - L - XL.



► E-BS630

COMBED COTTON SOCKS

- Soft and comfortable
- Breathable
- Durable

Fabric Cotton, polyester and spandex.

Size S - M - L - XL.



► E-BS620

COMBED COTTON SOCKS

- Soft and comfortable
- Breathable
- Durable

Fabric Cotton, polyester and spandex.

Size S - L - XL.



► E-BS620-WH

COMBED COTTON SOCKS

- Soft and comfortable
- Breathable
- Durable

Fabric Cotton, polyester and spandex.

Size S - XL.



► E-BS430

COOLMAX SOCKS

Coolmax fabric is designed to move moisture away from the body and enhance fabric drying rate thus, keeping your feeling cool and dry. Coolmax delivers performance and comfort through the use of proprietary polyester fibers with unique engineered microchannel cross sections and specially engineered two sided, denier gradient fabric made using polyester or nylon yarns.

Size S - M - L - XL.



CAP

CLOTHING



► E-HAT100-RD

CAP

- Curved visor
- Air vents
- Embroidered logo

Color Options



E-HAT100-BK



- Fabric** 65% Cotton, 35% Polyester.
- Size** One size fits all.



► E-CAP95-WH

CAP

- Low wind resistance
- Moisture-wicking fabric delivers exceptional comfort
- Fast drying terry cloth sweatband

Color Options



E-CAP95-RD



E-CAP95-BK



E-CAP95-BL



Fast drying terrycloth sweatband

- Size** One size fits all.

Exustar arm warmers provide warmth (or protection from the sun) by turning any short sleeve jersey or top into a long sleeve one. They are easily carried in a pocket or pack until needed.



E-AW115

ARM COVERS

- For cool, warm or hot conditions.
- UV protection
 - Breathable (elastic mesh provides extra ventilation)
 - Quick-drying

Fabric Spandex with elastic cuffs.
Color White.
Size S - M - L - XL.

E-AW115				
Measure Size/cm	S	M	L	XL
Length	37.5	39	40.5	42
Half bicep width	11.5	12.5	13.5	14.5



E-AW112

ARM COVERS

- For cool, warm or hot conditions.
- 3D anatomical cut
 - UV protection
 - Breathable

Fabric Spandex with elastic cuffs.
Color Black.
Size S - M - L - XL.

E-AW112				
Measure Size/cm	S	M	L	XL
Length	37.5	39	40.5	42
Half bicep width	11.5	12.5	13.5	14.5



E-AW111-BKWH



ARM COVERS

- For cool, warm or hot conditions.
- UV protection
 - Breathable (elastic mesh provides extra ventilation)
 - Sweat-wicking

Fabric Spandex with elastic cuffs.
Color Black with white mesh band.
Size S - M - L - XL.

E-AW111-BKWH				
Measure Size/cm	S	M	L	XL
Length	37.5	39	40.5	42
Half bicep width	11.5	12.5	13.5	14.5



E-LW200



THERMAL LEG COVERS

- For cool or cold conditions.
- UV protection
 - Breathable
 - Reflective logo

Fabric Spandex with elastic cuffs, and zippered ankle.
Color Black.
Size S - L - XL - XXL.



E-LW201



LEG COVERS

- For cool, warm or hot conditions.
- UV protection
 - Breathable
 - Reflective logo

Fabric Spandex with elastic cuffs, and zippered ankle.
Color Black.
Size S - M - L - XL.

BAGS





Internal pockets keep contents organized and in place

► E-BBU09

TOP TUBE BAG

- Water resistant
- Padded compartment
- Detachable inner compartment
- Internal mesh pockets
- Reflective logo

Fabric Polyester.
Size 19.5 x 6 x 10.5 cm.



Large internal mesh pocket with zipper.

Padded, and ventilated for effective airflow.



luggage trolley sleeve.

► E-BSB02

CYCLE SHOE CARRY BAG

Carry your cycle shoes and cycling clothing in this handy luggage trolley compatible bag. Water resistant, padded, and ventilated for effective airflow, this bag is convenient for any cyclist whether travelling or for shoe storage.

- Water resistant
- Ventilated
- Padded

Fabric Large ventilated compartment with moveable divider, large internal mesh pocket with zipper, hand carry strap, shoulder strap, and luggage trolley sleeve.
Size 35 x 28.5 x 12 cm.

Bike Fit Machine

For perfect pairing of cyclist and bicycle.

E-BFM200

In the cycling community, misfitting bikes are one of the most common causes of inefficient performance, discomfort, and injury – and the more you ride a misfitting bike, the greater the problems.

The Exustar bicycle fitting machine makes it easy for a cyclist to try and test a variety of frame and stem sizes, and frame angles before purchasing a bike, thus insuring performance, and comfort in the longterm.

The self-contained, fully-adjustable unit is a tremendous aid to a bike shop. Not only does the bicycle fitting machine help a bike shop owner provide a better product and service, it potentially means less money tied up in stock as a bike built can be ordered or built after a measurement workout with the fitting machine.

The bicycle fitting machine is best used in conjunction with measuring systems such as Fit Kit.

Supplied with drop bars and flat bars.




Optional equipment



Angle Gauge




E-BFT01
Bike Fit Goniometer

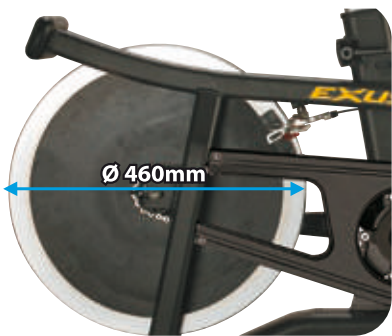


1 Ø460mm Flywheel



2 Seat Tube adjustable

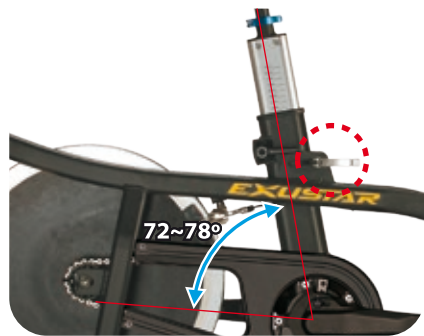


3 Seat Tube angle adjustable

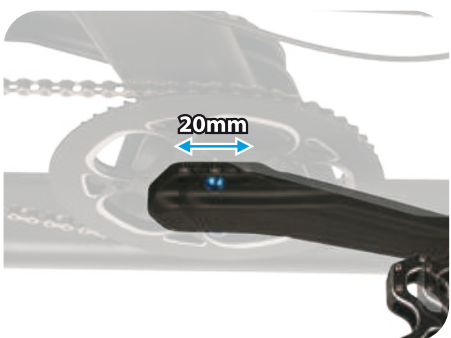


4 Crank adjustable (max 20mm)




5 Brake button

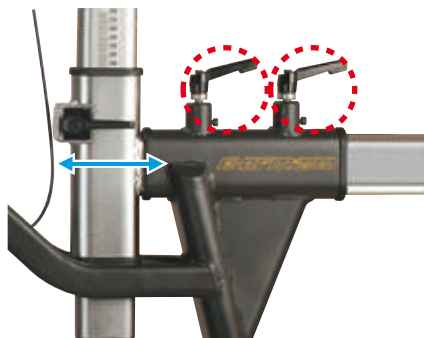


6 Head Tube adjustable (Reach)

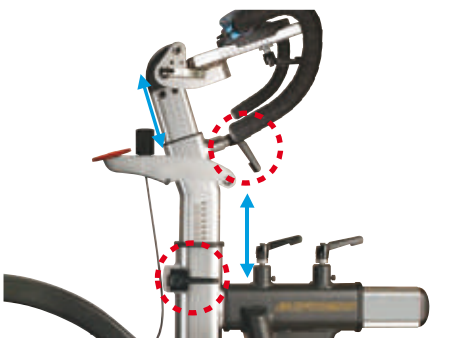

7 Head Tube adjustable (Stack)

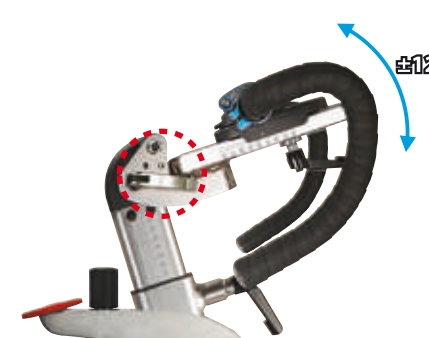

8 Stem angle adjustable

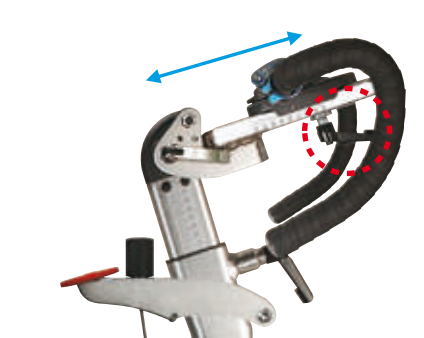

9 Stem adjustable



10 Angle Gauge



11 Spirit level



12 Optional equipment

Bike Fit Machine

For perfect pairing of cyclist and bicycle.

► E-BFM100




Optional equipment




Angle Gauge



E-BFT01
Bike Fit Goniometer

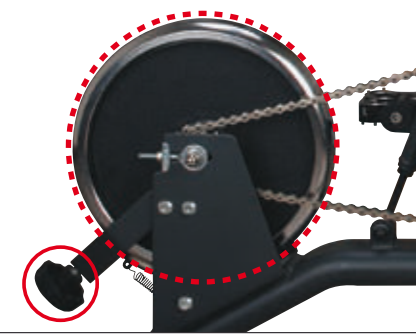


1 Friction Adjustable

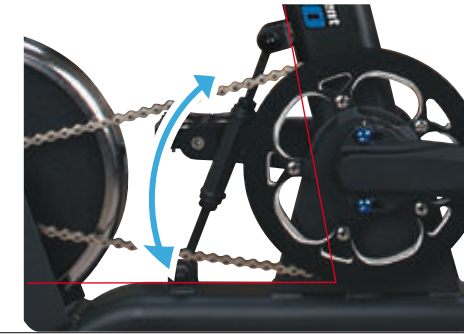

2 Seat Tube angle adjustable




3 Crank adjustable (max 20mm)

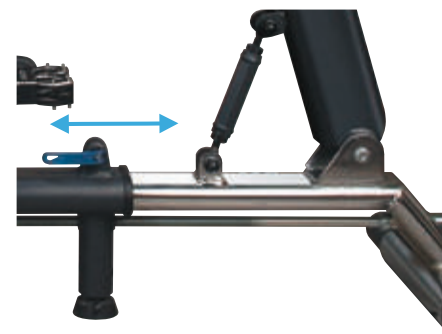


4 Top Tube adjustable




5 Top Tube adjustable

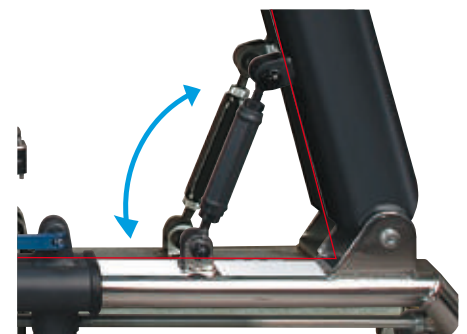

6 Head Tube angle adjustable

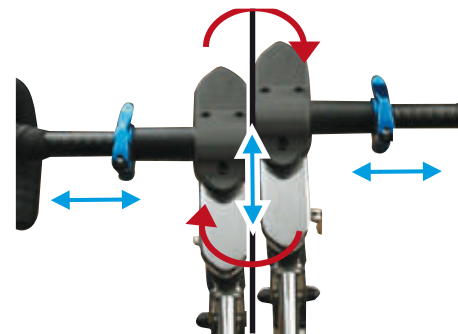

7 Handle Bar adjustable

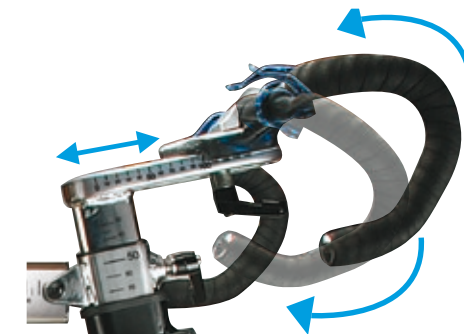

8 Handle Bar Stem adjustable



9 Seat Tube adjustable




10 Head Tube adjustable



E-EMP287

11 Angle Gauge

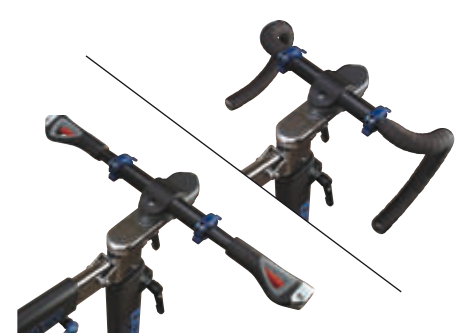

12 Supplied with drop bars and flat bars.



DISTRIBUTORS

NORTH AMERICA

USA				
Cyclone Bicycle Supply 217 Washington Avenue Carlstadt, NJ 07072 Tel: 201-804-9090 E-mail: info@cyclonebicycle.com Web: www.cyclonebicycle.com	J&B Importers 11925 SW 128th Street Miami, Florida, 33186 Tel: 800-666-5000 Web: www.jbi.bike	Olympic Supply Company 7528 North Teutonia Avenue Milwaukee, WI 53209 Tel: 414-461-8380 Web: www.osco.bike	Quality Bicycle Product 6400 W. 105th Street Bloomington, MN 55438 Tel: 952-941-9391 Web: www.qbp.com	North America Cycles 2015 SE 5th Street, Ames, Iowa 50010 Tel: (844) NAC-BIKE Web: www.nacycles.com

LATIN AMERICA

COLOMBIA	ARGENTINA	EI SALVADOR	MEXICO	PERU
Disandina S.A. Calle 80 sur No. 47D - 65 Bodega 108 Urbanizacion Industrial La Holanda Sabaneta, Antioquia, Colombia Tel: 4 444 2404 ext. 202, 221 Fax: 4 288 2825 E-mail 1: cupegui@disandina.com E-mail 2: dpanesso@disandina.com Web: www.disandina.com	PEREYRA Mayorista de bicipartes Alem 670 esq. Omil - 4300 - La Banda - Sgo, Del Estero Tel: 0385 427 2400 Fax: 0385 427 3923 E-mail: ipereyra@pereyramayorista.com.ar Web: www.bicicleteriapereyra.com.ar	Corbes S.A. de C.V. 17 Avenida Sur y 2°. Calle Oriente #48, Santa Tecla Tel: +503 2536 3111 Fax: +503 2536 3100 E-mail: alex@corbes.com.sv Web: www.bicicletascorsario.com	CICLO DISTRIBUTION Av. Vallarta 3085, Vallarta Poniente, Guadalaaja, Jal. 44110 Tel: 33 3647 9020 E-mail: ventas@ciclodistribution.mx Web: www.ciclodistribution.mx	RV PRO International S.A.C. Jr. Moquegua 642 - O Lima Tel: 333 3734 Fax: 425 1054 E-mail: rv_prointernational@yahoo.com Web: www.bravo.com.pe
Exclusive Distributor	Exclusive Distributor			

PARAGUAY	COSTA RICA	COSTA RICA	URUGUAY	CHILE
Delta Bikes Paraguay Avda. Adrian Jara c/ Rubio Ñu Shopping Hwu 2 , Local No. 5 Ciudad del Este, Paraguay TEL. 595 61 502833 WhatsApp : +595 983 297865 Facebook : Delta Bikes PY	3-101-683406 S.A RAPTOR BICI-REPUESTOS 200 Norte 25 Este Del Hotel Europa San José, Costa Rica Tel: (506) 2222-3293 FAX: (506) 2221-2390	Distribuidora Ochenta Y Seis S.A. Del Instituto Julio Acosta Garcia 1 km oeste, San Ramon de Alajuela. Tel: (506) 2445 66 69 Fax: (506) 2445 61 85 E-mail: eleon@superpro.ws Web: www.superprobikes.com	Roller Competicion. Lapine S.A Address : 8 de Octubre 4005 (Esq. Silvestre Perez), Motevideo Tel: 02 509 4910 E-mail: lapine@adinet.com.uy	Imvasa S.A. San Pablo #1910 Santiago Tel: 02 449 9300 E-mail: contacto@bianchi.cl Web: www.bianchi.cl

DOMINICAN REPUBLIC	GUATEMALA	ECUADOR
LA BICICLETERIA Condominio Mirador Sur #488 Tel: 829-236-7865 E-mail: info@labicicleteria.do Web: www.labicicleteria.do	Ciclismo en Guate 8 Av. 2-01 Zona 10 Plaza Apolo local 4 y 7, Guatemala, Guatemala 01010 Tel: +502-2234-6451 E-mail: info@ciclismoenguate.com Web: www.ciclismoenguate.com	EAGLE BIKES SHOP SCC Panamericana Norte y Luis H. Gordillo Tel: +593 99 399 4939 E-mail: info@eaglebikes@gmail.com Web: www.eaglebikesshop.com

AFRICA

MAURITIUS

Emcar Ltd.
Old Moka road, Bell Village, Port Louis,
Mauritius
Tel: 405 1040
Fax: 212 5952
Web: www.emcar.mu

EUROPE

AUSTRIA / GERMANY / HUNGARY	BULGARIA	DENMARK	ITALY
Messingschlager GmbH & Co. KG Hassbergstrasse 45, 96148 Baunach Tel: 095 44 94 44 63 Fax: 095 44 64 44 963 E-mail: bt@messingschlager.com Web: www.exustar.messingschlager.com Web: www.messingschlager.com	Maxbike Ltd 1* Goliarno Konarsko Shosse* str. 4000 Plovdiv Tel: 032 921 913 Fax: 032 921 921 E-mail: s.enkin@maxcombike.com Web: www.bikesport.bg	Cykelpartner.dk.ApS Industrivej 9, 7870 Roslev Tel: +45 39 40 31 31 E-mail: info@cykelpartner.dk tj@cykelpartner.dk Web: www.cykelpartner.dk	Mandelli S.p.a. Via Tommaso Grossi 5 20841 Carate Brianza (MB) Tel: +39 0362 1797800 Fax: 0362 1797850 E-mail : info@mandelli.net Web: www.mandelli.net
Exclusive Distributor			Exclusive Distributor

PORTUGAL / SPAIN	NORWAY	CZECH REPUBLIC	SLOVAKIA
CDC Sport Plaza De La Concordia 2 46900 Torrente, Valencia (Spain) Tel: (+34) 96 313 45 59 Fax: (+34) 96 313 43 03 E-mail: info@cdc-sport.com Web: www.cdc-sport.com	Norgaard Sport As C/O Birk Sport Løxaveien 19 1351 Rud Org Nr: 923 950 591	Schindler, s.r.o. Slezská 101/112 747 27 Kobeřice tel.: +420 726 298 072 E-mail: info@schindler.cz Web: www.schindler.cz	Schindler, s.r.o. Slezská 101/112 747 27 Kobeřice tel.: +420 726 298 072 E-mail: info@schindler.cz Web: www.schindler.cz

SWITZERLAND	GREECE
Tekno Parts Ltd Keltenstrasse 19, 2563 Ipsach. Tel: 032 332 84 60 Fax: 032 332 84 61 E-mail: info@teknoparts.ch Web: www.teknoparts.ch	TZORTZOPOULOS I. Ltd Kallirrois 71 117 43 Neos Kosmos - Athens Hellas (Greece) Tel. +30 210 9241108 Email: yannis@tzortzopoulos.gr Web: www.tzortzopoulos.gr

ASIA PACIFIC

MALAYSIA	HONG KONG	SOUTH KOREA	PHILIPPINES
Ngee Cycle Trading Sdn Bhd No.9, Jalan TSB 1, Taman Industri Sg. Buloh, 47000 Petaling Jaya, Selangor, Darul Ehsan MALAYSIA Tel: +603 6141 2564/ +603 6151 2119 Fax: +603 6151 9115 E-mail: info@ngeecycle.com	Wun Pang Bicycle Company Limited Shop No.5 G/F, 16 Hi Yip Street, Yuen Long, N. T. Tel: 2476 4545 Fax: 2479 1879 E-mail: sales@wunpangbicycle.com Web: www.wunpangbicycle.com	Comet Bicycle Co., Ltd. 516-1 Shinwolli Chowolup Kwangjusi Kyounggid0464864 Korea Tel: 031 795 8357 & 031 795 8358 Fax: 031 795 8359 E-mail: hckim@cometbicycle.com Web: www.cometbicycle.com	Bikeone Cycle Allarey cor,Lakandula St, Birgy. 7, Lucena City Quezon,Philippines 4301 Tel: +63-9275125465 E-mail: cho@bikeonecycle.com Web: www.bikeonecycle.com

INDIA	THAILAND	INDONESIA
Verdant Outdoor Sports World Private Limited The Bike Store Door No.35/1688/A 2, JN International Stadium Link Road, Palari vattom, Kochi, Kerala 682025 India Tel : +91 484 4024424 Mob: +91 9746400973 E-mail: biker@thebikestore.in Web: www.thebikestore.in	La Bicycle (Thailand) Co., Ltd 58 Moo 2, Oam-yai, Sampran, Nakompathom 73160 Thailand Tel: 66-2-819-4488 Fax: 66-2-812-6685 E-mail: AFM@la-bicycle.com Web: www.infinite-cycling.com Web: www.la-bicycle.com	PD. Ban Cong Hien JL. Waspada No.68 Surabaya Tel: 031 353 8686 Fax: 031 353 7117